


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		T	REVISED PER ECR-12-013323	09AUG12	KH	TM
			T1	REVISED PER ECR-14-001607	11FEB14	AV	GK

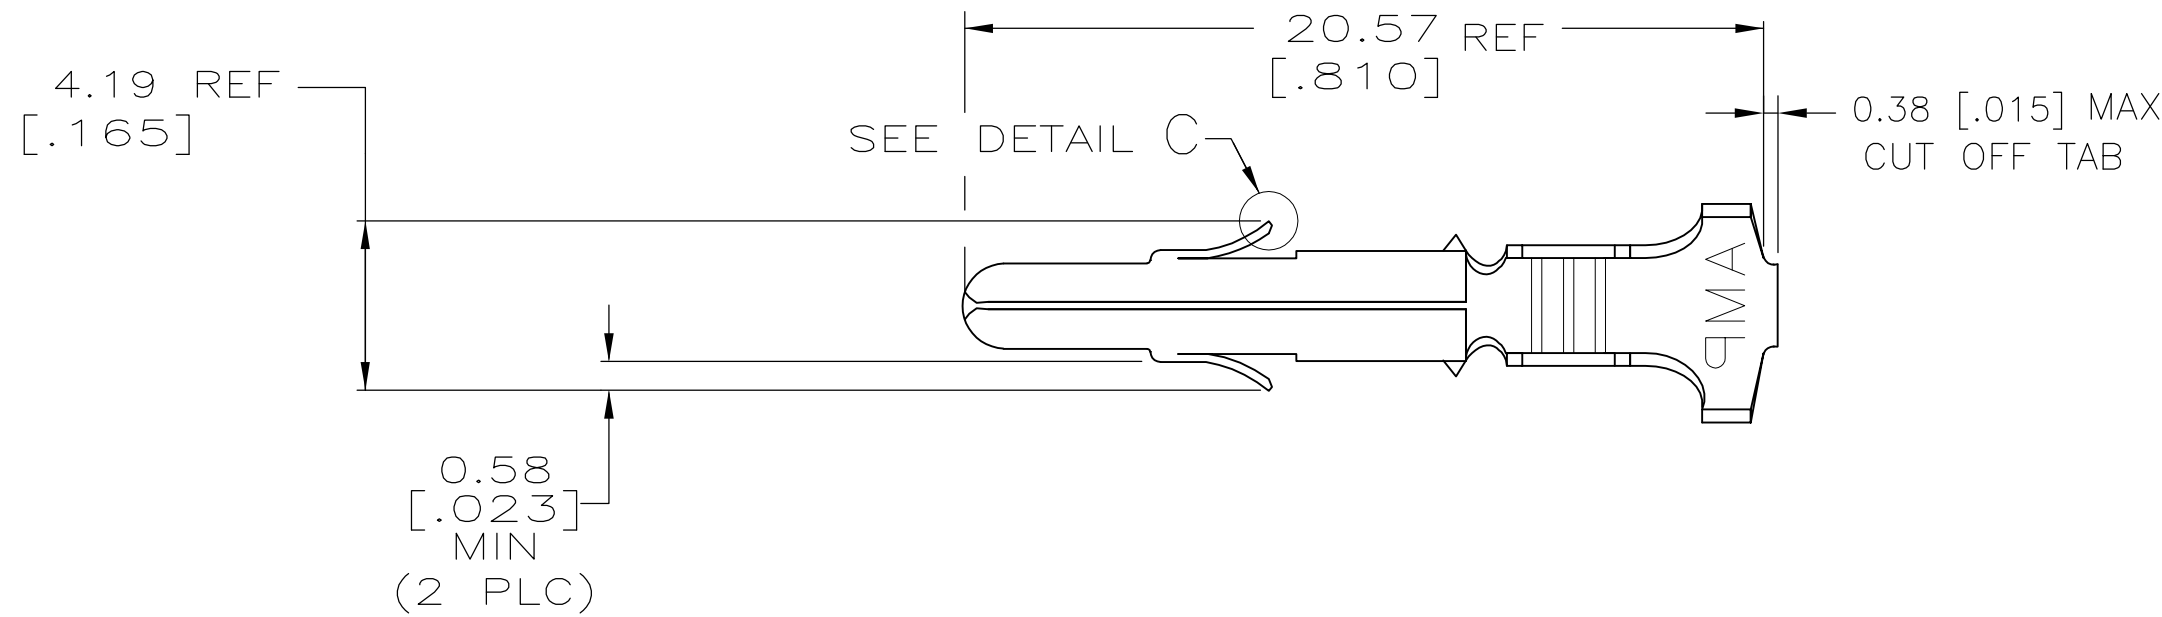





- 1

PLATED WITH 0.00076[.000030] GOLD OVER 0.00127[.000050] MIN THK NICKEL UNDERPLATE.
- 2

GOLD OVER NICKEL ON ENTIRE STAMPING; 0.00076[.000030] GOLD MINIMUM AT OINT OF MEASUREMENT IN CONTACT AREA, GOLD FLASH MINIMUM IN WIRE BARREL.
- 3

DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4

WIRE RANGE: 20-14 AWG
INSULATION RANGE : 3.30-5.08 [.130-.200] DIA.

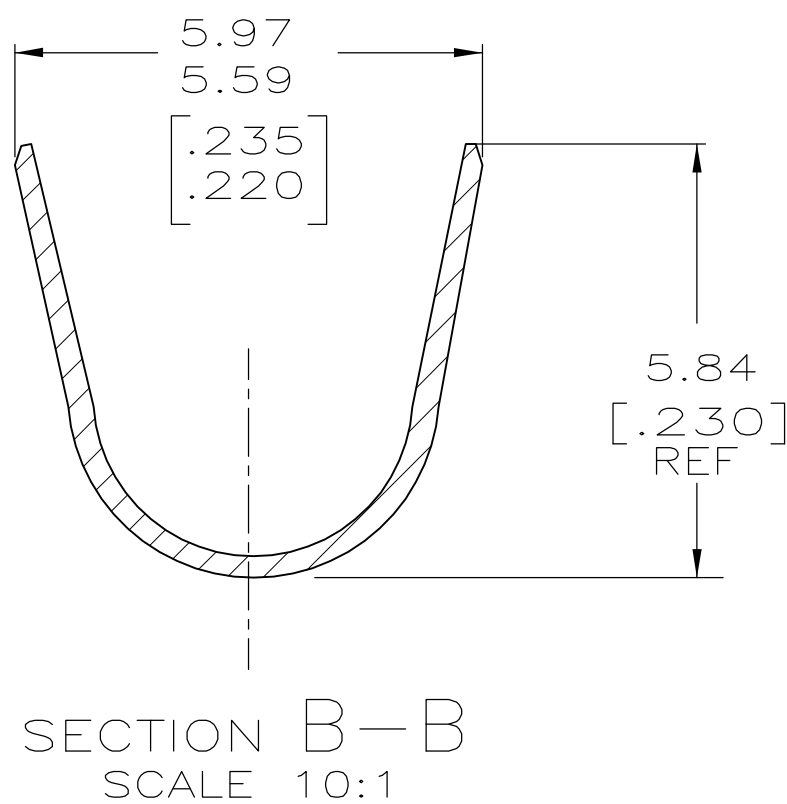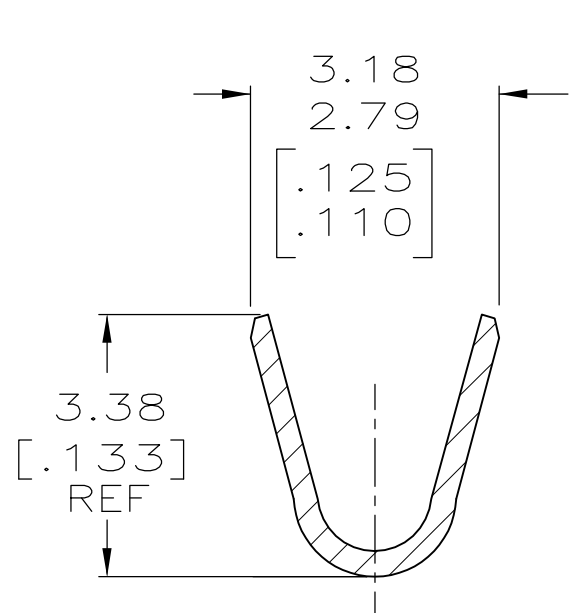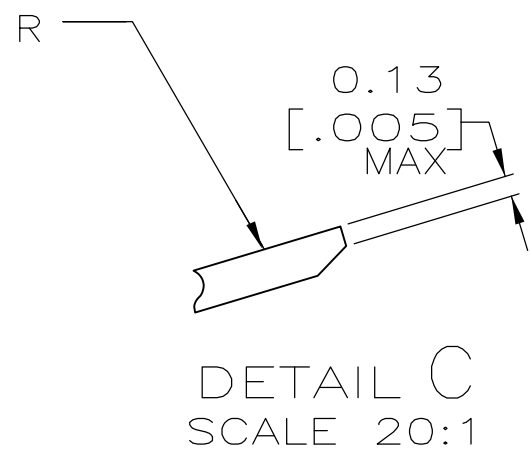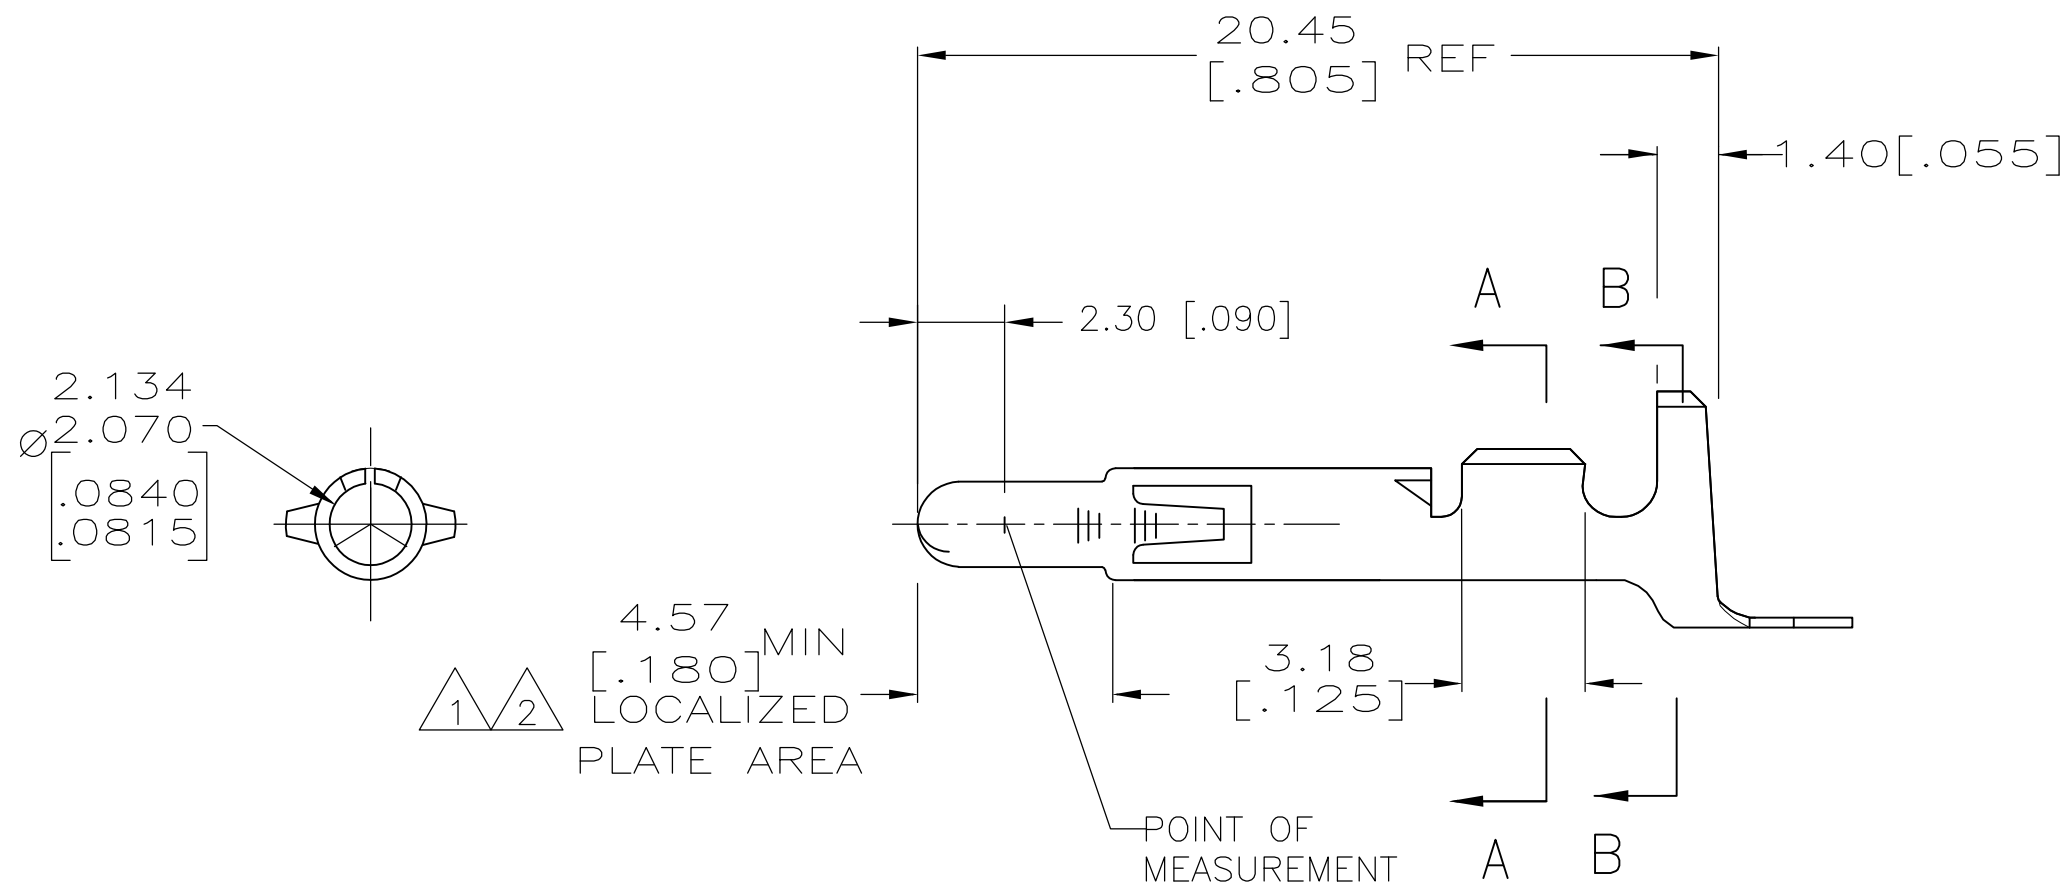

GOLD	2	0.30 [.012] BRASS	350552-7
GOLD	2	0.30 [.012] PH BZ	350552-6
TIN		0.30 [.012] PH BZ	350552-3
GOLD	1	0.30 [.012] BRASS	350552-2
TIN		0.30 [.012] BRASS	350552-1
FINISH	MATERIAL		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12NOV2004		 TE Connectivity							
		CHK S. RIDGILL 12NOV2004									
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PIN, (LOOSE PIECE), UNIVERSAL MATE-N-LOK™							
		APVD S. RIDGILL 12NOV2004									
		PRODUCT SPEC —									
		APPLICATION SPEC —									
MATERIAL —		FINISH —		SIZE A2		CAGE CODE 00779		DRAWING NO C=350552		RESTRICTED TO —	
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 of 1		REV T1			