


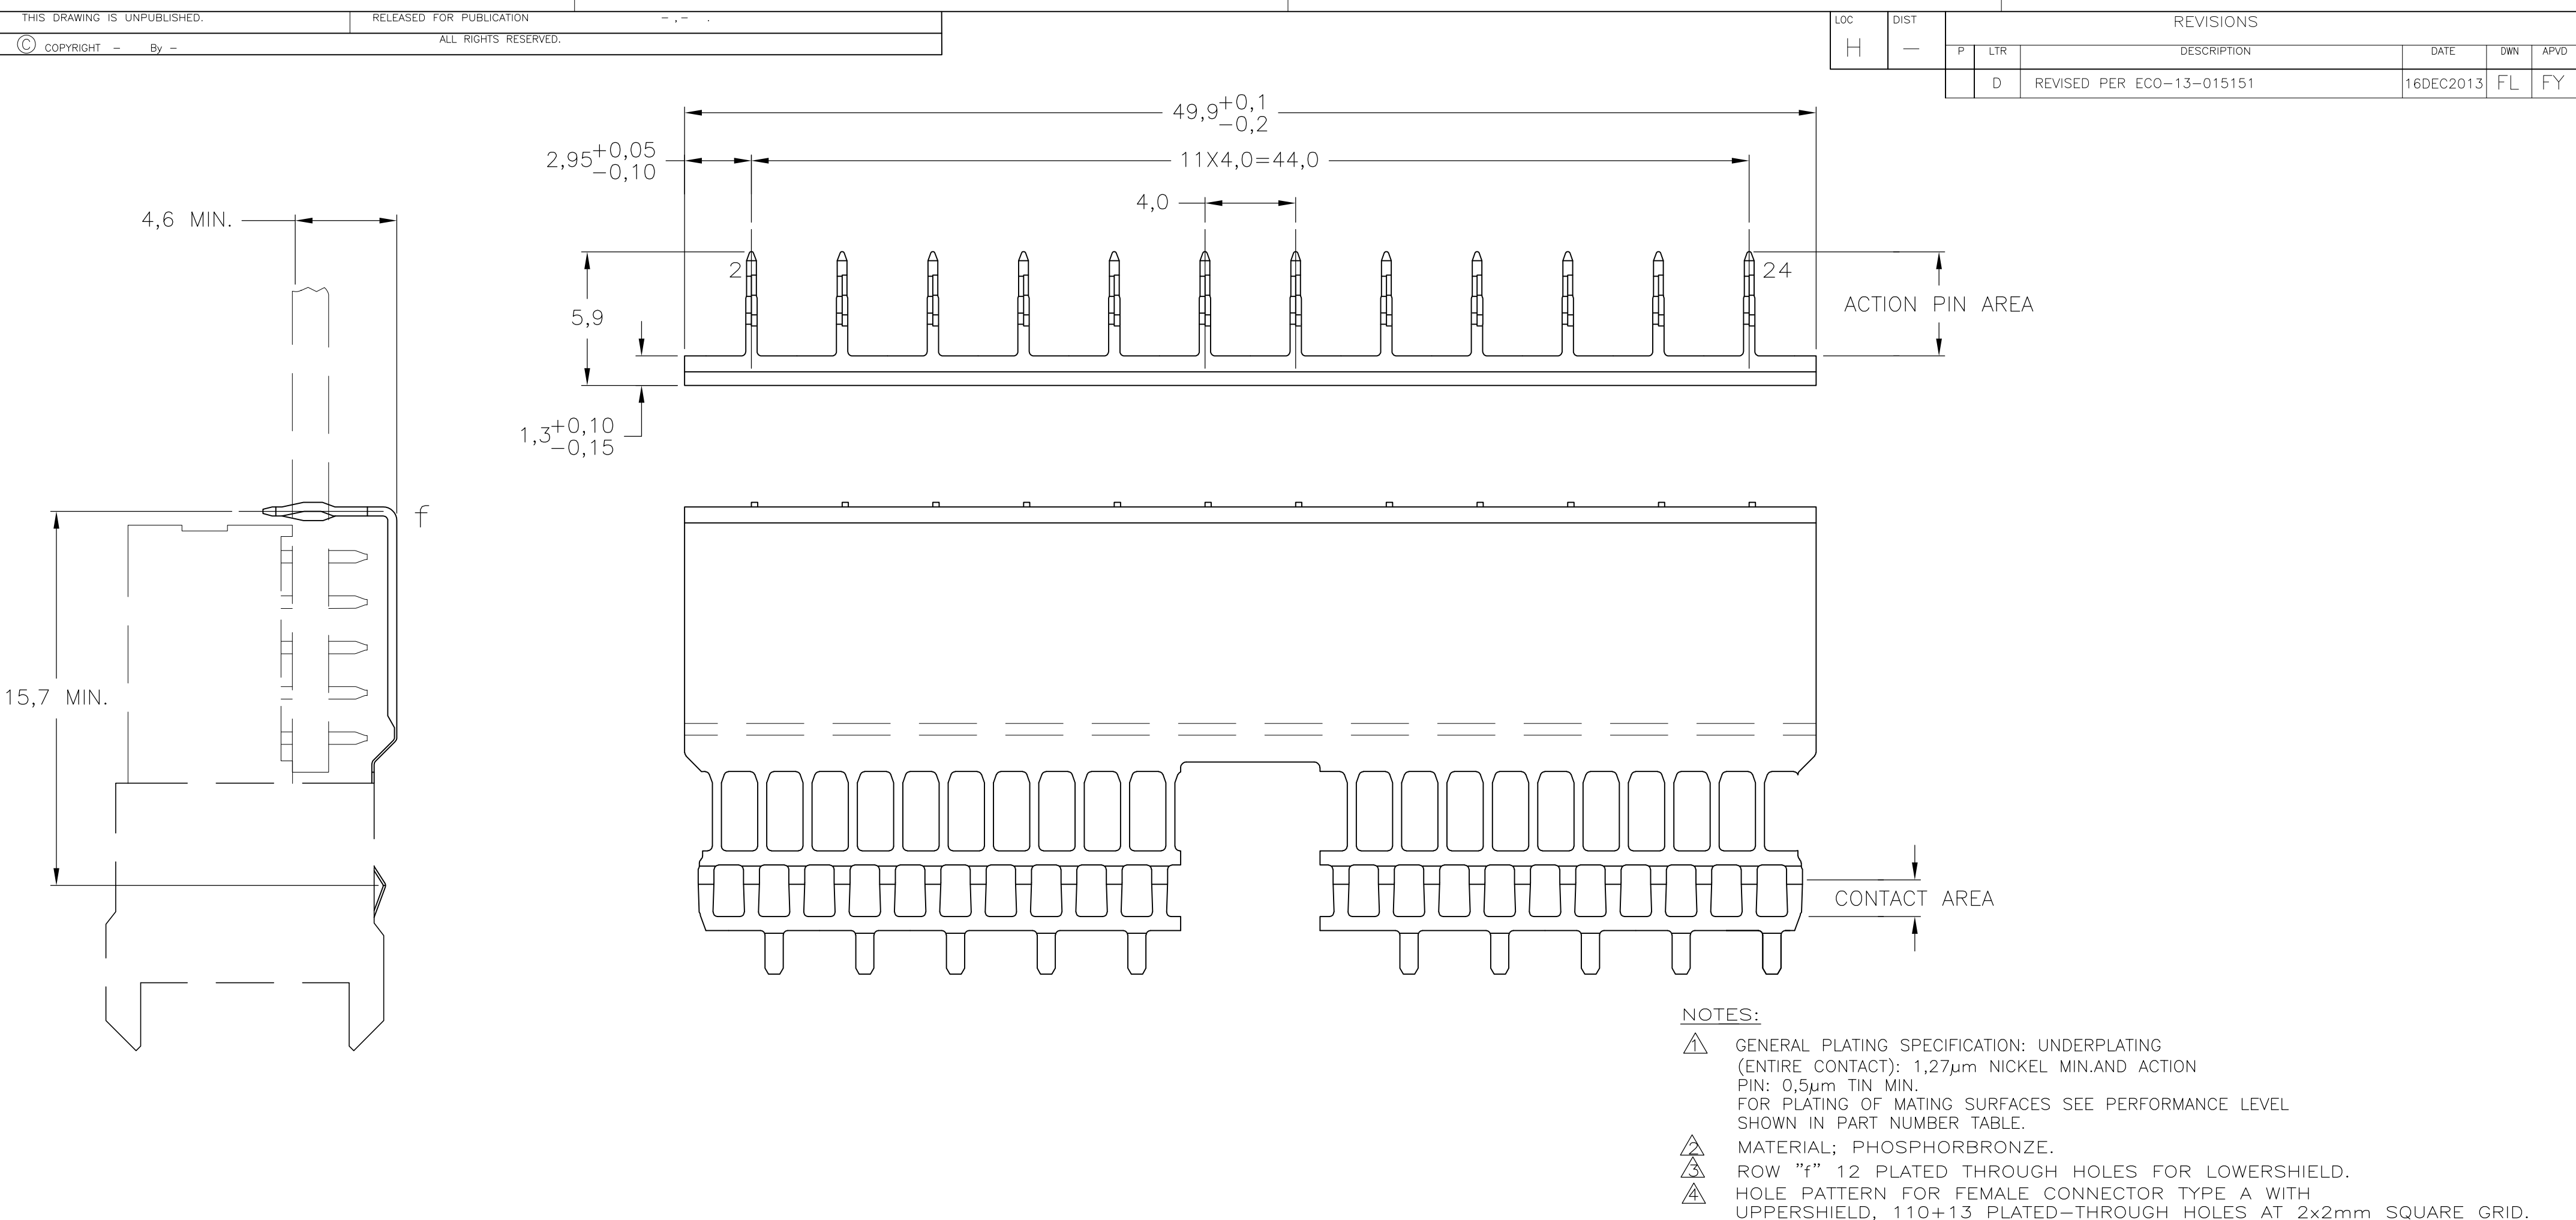

- NOTES:
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - MATERIAL; PHOSPHORBRONZE.
 - ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - MAX. BOARD THICKNESS 3,5 mm.
 - SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - 0.76µm MIN GOLD PLATING AT MATING SURFACE.

1110	2	4-5338108-0
169	2	5338108-9
11	2	5338108-2
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN	13AUG04	TE TE Connectivity	
DIMENSIONS: mm		CHK B.MOOIJ	25MAR05		
		APVD B.MOOIJ	25MAR05	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A	
		PRODUCT SPEC 108-19082	APPLICATION SPEC 114-19029		
MATERIAL -		WEIGHT -	SCALE A2	CAGE CODE 00779	DRAWING NO C=5338108
		FINISH -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1
				REV D	