


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G		REVISED PER ECO-13-001881	02APR2013	LJC	T.T

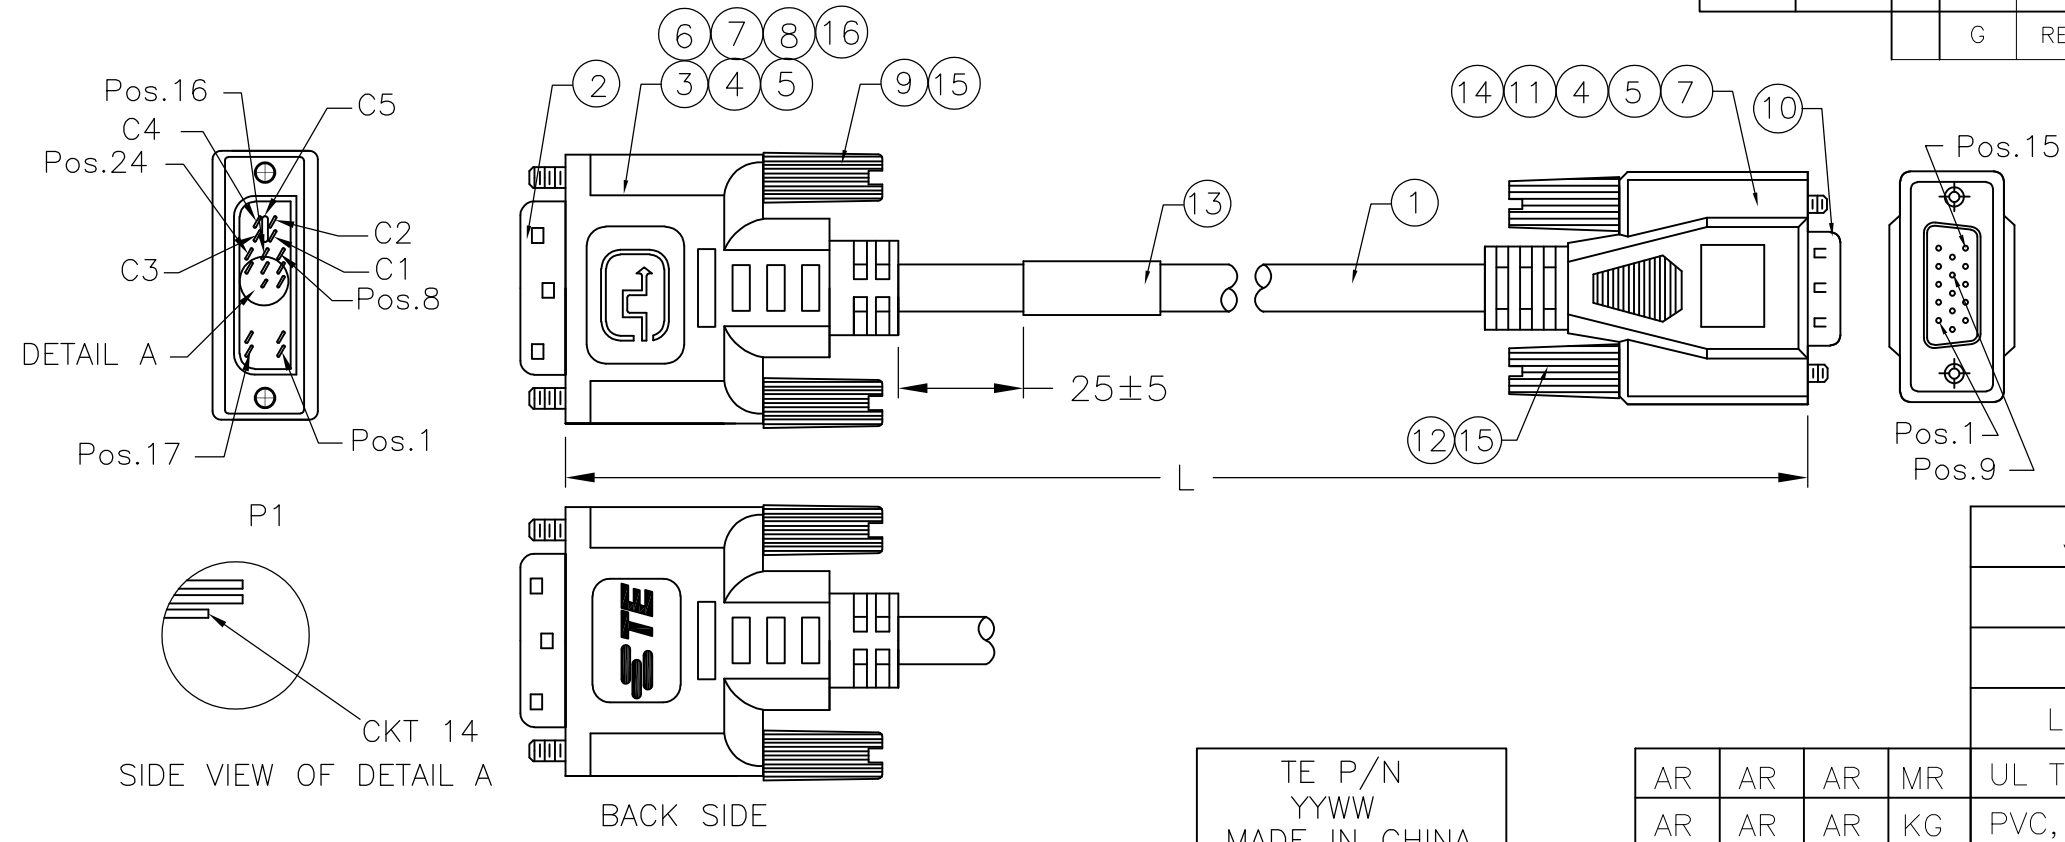


3000±80		1653932-3
2000±60		1653932-2
1000±30		1653932-1
LENGTH(L)	CUSTOMER P/N	TE P/N

AR	AR	AR	MR	UL TAPE, BLACK	16
AR	AR	AR	KG	PVC, Shore A 95±3, Color: White (WH03).	15
AR	AR	AR	MR	Copper Foil, W: 30mm.	14
1	1	1	PC	Label, Size: 25.0*35.0, White: 25.0*13.0mm.	13
2	2	2	PC	#4-40 Screw, L=43mm	12
AR	AR	AR	KG	Inner Molded PE	11
1	1	1	PC	HDDB15, Male, Solder Type, Contact: Gold Flash	10
2	2	2	PC	DVI #4-40 3*45mm Thumbscrew.	9
AR	AR	AR	MR	Copper Foil, W:8mm.	8
AR	AR	AR	KG	PVC, Shore A 90±3, Color: White (WH03).	7
AR	AR	AR	g	Solder Wire	6
AR	AR	AR	MR	Heat Shrink Tubing, OD:2.5mm, Color: Black.	5
AR	AR	AR	MR	Heat Shrink Tubing, OD:1.5mm, Color: Black.	4
1	1	1	PC	Metal Can For DVI Connector, Meet OD: 7.4mm	3
1	1	1	PC	DVI-A Connector, Gold Flash	2
AR	AR	AR	MR	UL20276 30AWG*3Coax.+28AWG*1Pair +28AWG*5C+Al/Mylar+Braid, Color: Black(BK01)	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

NOTES:

- CABLE SHALL BE TESTED WITH AUTOMATED TEST EQUIPMENT FOR THE FOLLOWING:
 A. CONNECTION RESISTANCE SHALL NOT EXCEED 1.8 OHMS.
 B. INSULATION RESISTANCE 100 MEGOHMS, MIN.
 C. HIPOT-300 VOLTS AT 0.01 SEC.
- CABLE ASSEMBLY MUST PASS DVI 1.0 SPECIFICATION.
- DIRECTIVE 2002/95/EC COMPLIANT.
- 100% DISPLAY-SCREEN FUNCTIONAL TESTING

PIN ASSIGNMENT :

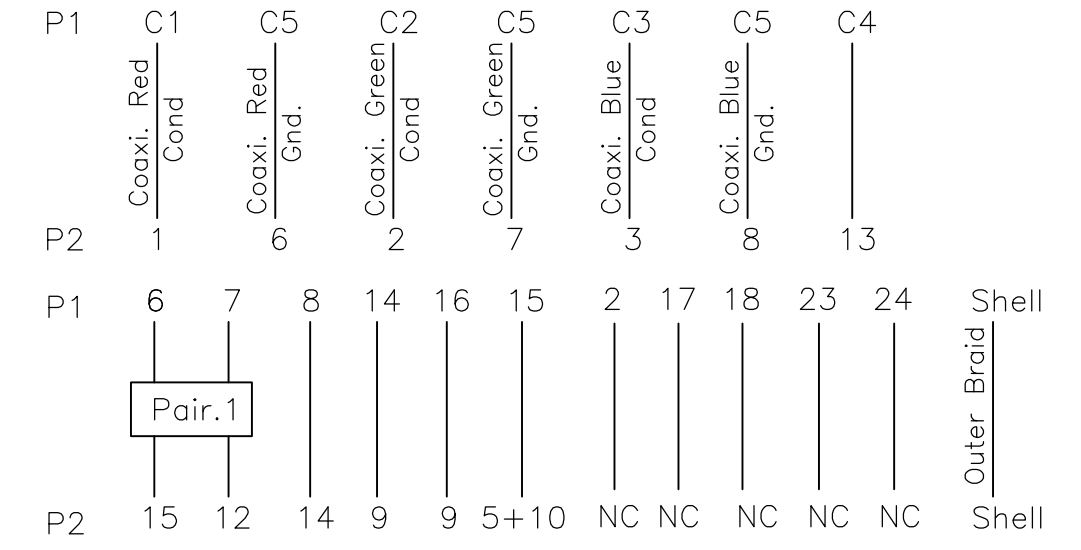

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JURRY LIU	22JAN03
DIMENSIONS: mm		CHK	MONTGOMERY, JOHN D	15JUN04
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MONTGOMERY, JOHN D	15JUN04
0 PLC	± -	PRODUCT SPEC		
1 PLC	± -	APPLICATION SPEC		
2 PLC	± -	SIZE		
3 PLC	± -	CAGE CODE		
4 PLC	± -	DRAWING NO		
ANGLES	± -	RESTRICTED TO		
MATERIAL	FINISH	WEIGHT		
-	-	A3 00779 C-1653932		
CUSTOMER DRAWING		SCALE		SHEET
		N.T.S		1 OF 1
		REV		G



DVI-A TO VGA CABLE ASSEMBLY