
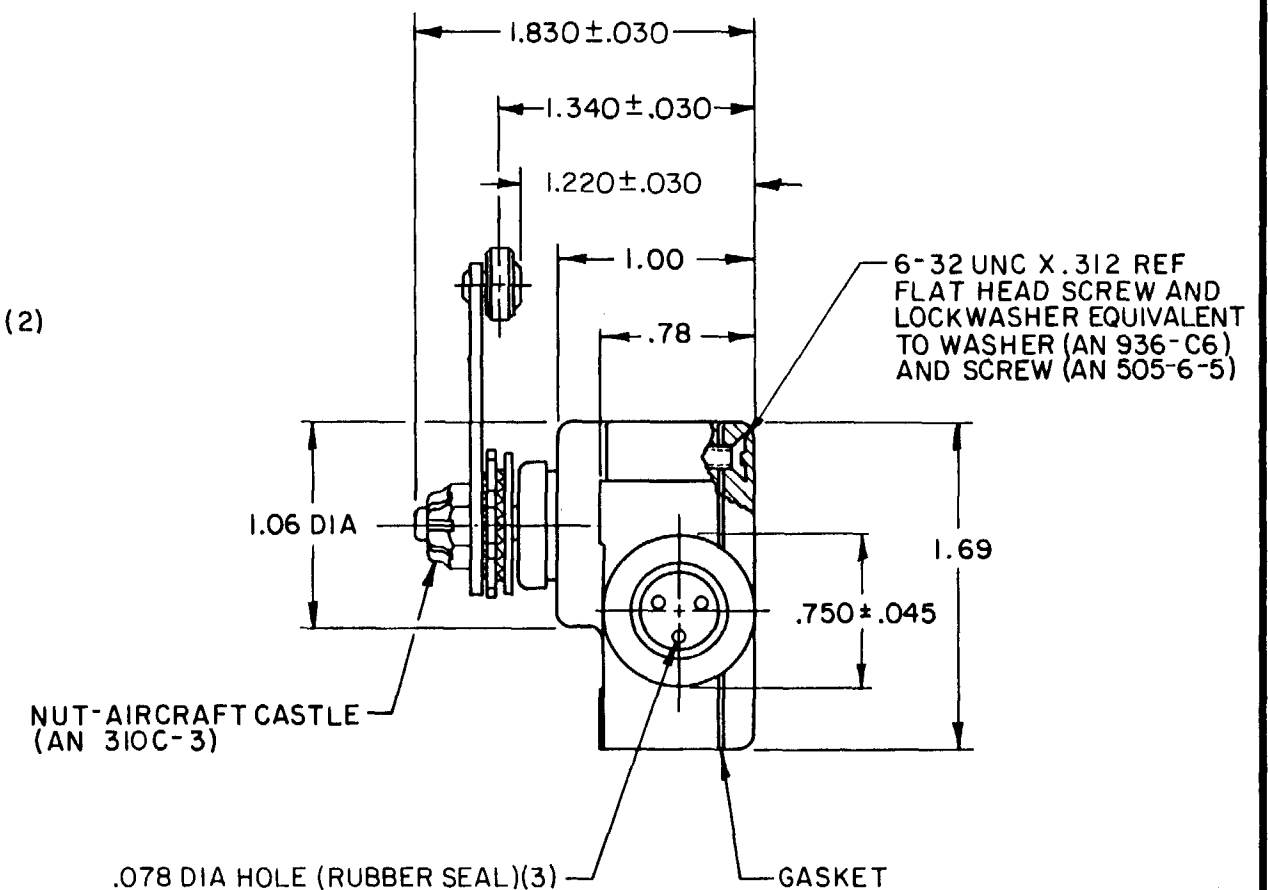


MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91829

SWITCH - ENCLOSED

CATALOG LISTING
1VA43

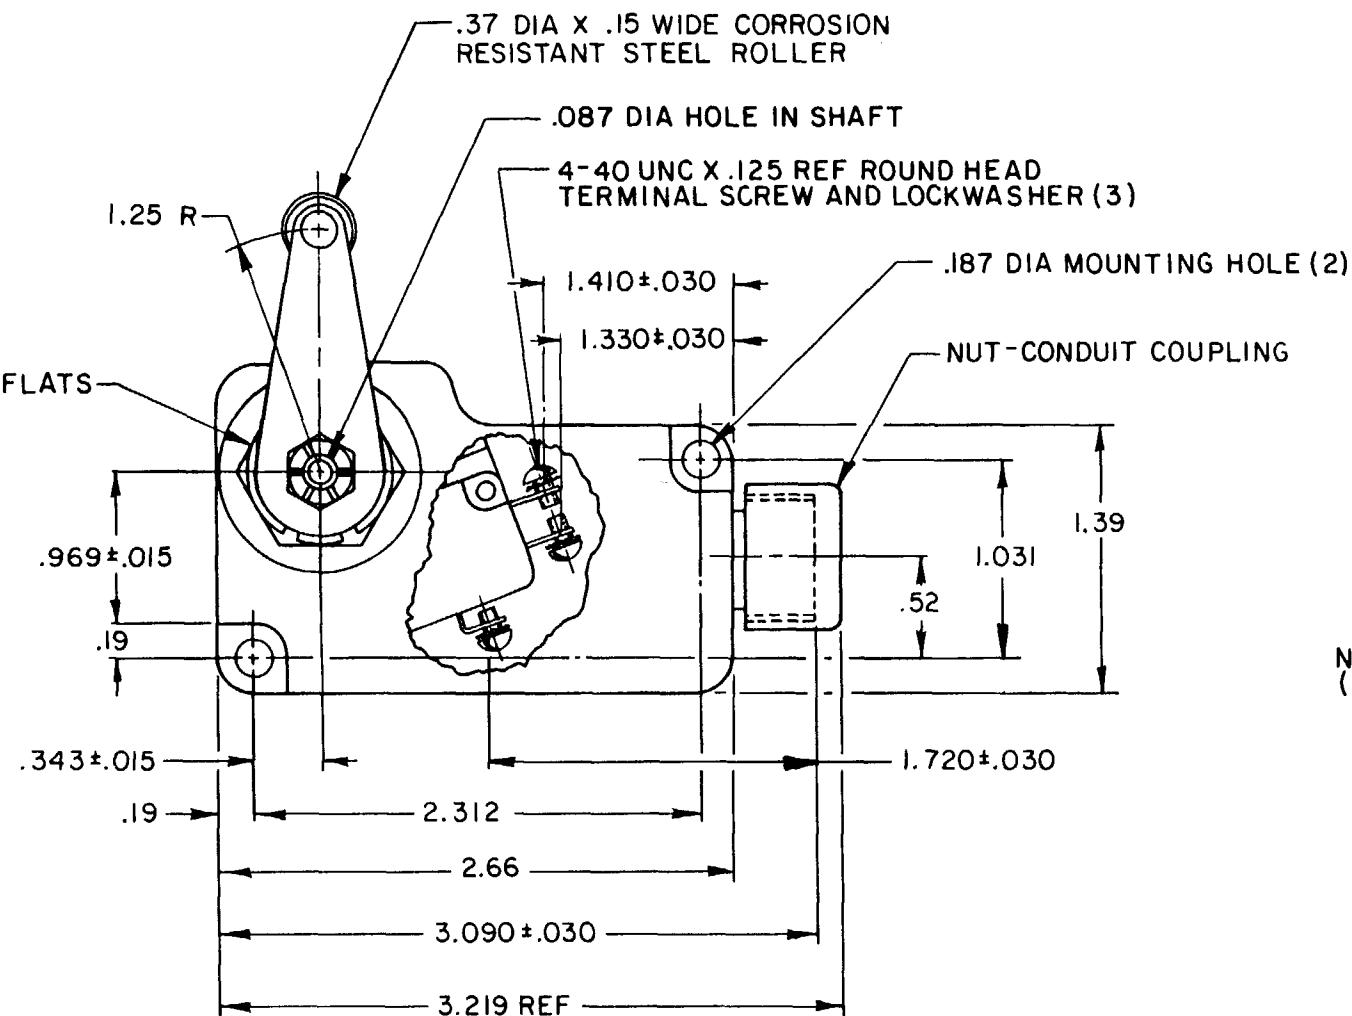

NOTES

- 1 - UNIT INCLUDES (1) CAT. LIST. V3-26 SWITCH
- 2 - ALUMINUM ALLOY ENCLOSURE ZINC PHOSPHATE COATED AND FINISHED WITH ONE COAT PRIMER
- 3 - LEVER ARM MAY BE POSITIVELY LOCKED AT INTERVALS OF APPROX 0.2° (1980 POSITIONS)
- 4 - TOTAL TRAVEL OF LEVER IS APPROX 90° IN EITHER DIRECTION WITH SPRING RETURN TO NEUTRAL
- 5 - SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURE TO MINUS 65°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 1/2 - 1 1/2 LB
RELEASE FORCE ----- 1/4 LB MIN
PRETRAVEL ----- 30° MAX
DIFFERENTIAL TRAVEL ----- 8° MAX
OVERTRAVEL ----- 55° MIN

CHARACTERISTICS APPLY TO OPERATION OF SWITCH IN EITHER DIRECTION

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A-125 OR 250 VAC

SCALE FULL

DO NOT SCALE PRINT


TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	
ONE PLACE	X.X	0.4/018	X.X
TWO PLACES	X.XX	0.18/008	X.XX
THREE PLACES	X.XXX	0.13/005	X.XXX

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION



WEIGHT .27 LB