
	NOTE: TERMINALS 4,5,6 ARE FOUND ONLY ON DP VERSIONS (-3, -4)
---	---





1 RATING: MIN, 1 μ a 20mV DC; MAX, 60mA 30V DC (RESISTIVE LOAD)
2 INITIAL CONTACT RESISTANCE: 20m Ω MAX. AT 5mA 0.2mV AC.
3 INITIAL INSULATION RESISTANCE: 1,000M Ω MIN. AT 500V DC. (BETWEEN TERMINALS AND TERMINAL-GROUND)
4 INITIAL DIELECTRIC STRENGTH: 1,000V AC FOR 1 MINUTE. (BETWEEN TERMINALS AND TERMINAL-GROUND)
5 DURABILITY: 50,000 CYCLES

6	$3.92 \pm 1.96N. (400 \pm 200gf)$
7	$4.9 \pm 1.96N. (500 \pm 300gf)$
8	$2.94 \pm 0.98N. (300 \pm 100gf)$
9	$4.9 \pm 1.96N. (500 \pm 200gf)$
10	OPERATING TEMP: $-20 \sim +85^{\circ}C$ STORAGE TEMP: $-40 \sim +85^{\circ}C$
11	ALL MATERIALS AND FINISHES SH
12	LASER MARKING USED FOR MARK

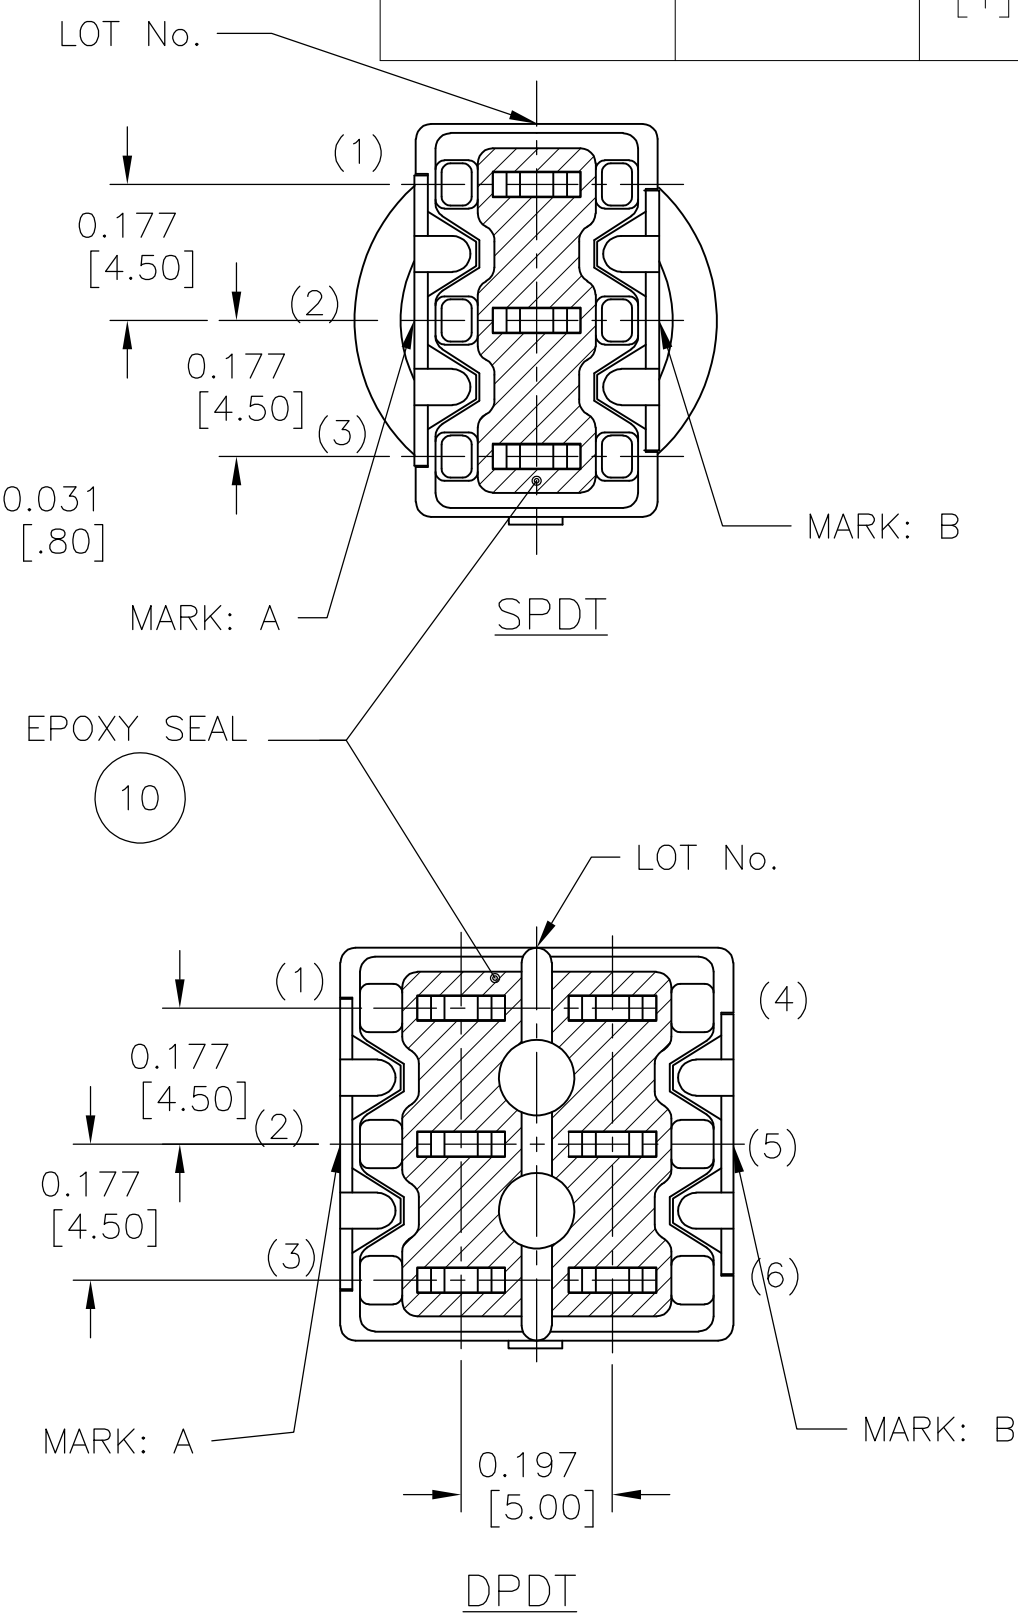

PANEL CUT-OUTS (REF)

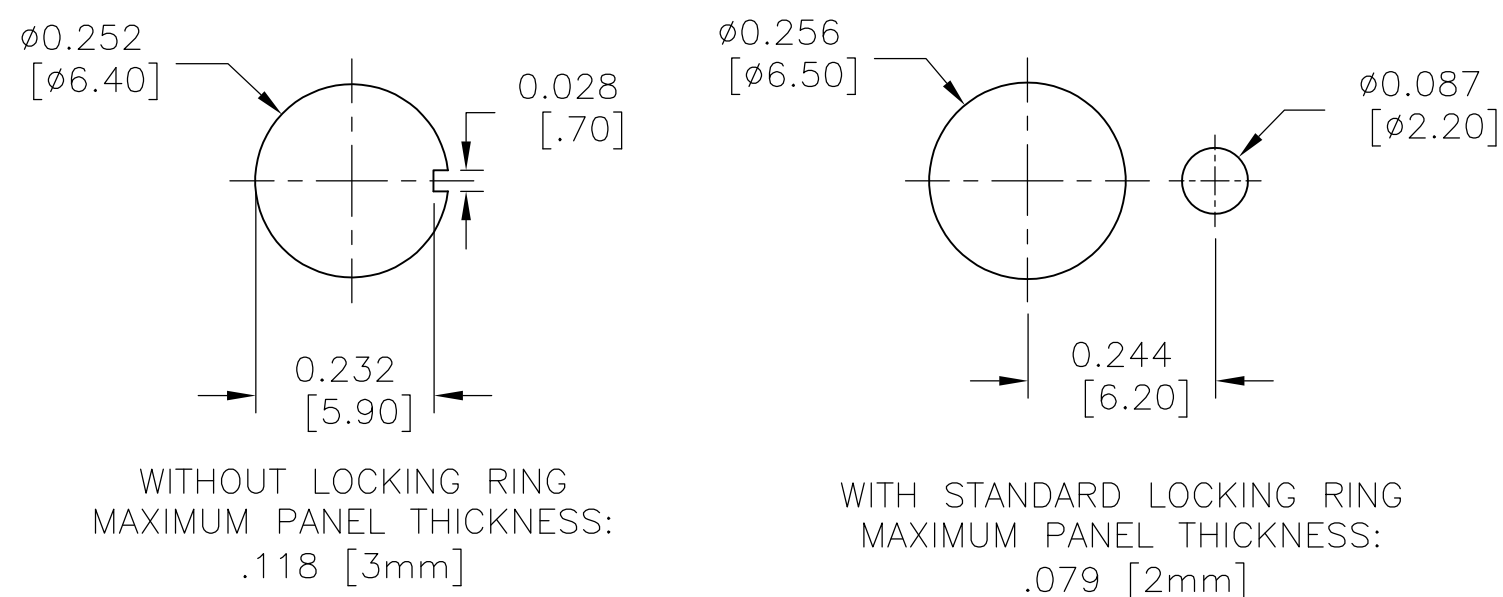

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG. RAGHAVENDRA 28JAN11 CHK. 28JAN11		 TE Connectivity									
DIMENSIONS: INCHES [mm]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		EPPLEY NAZ 28JAN11 EPPLEY NAZ 28JAN11		NAME									
		0 P L C ± -		PRODUCT SPEC		MPS SERIES PUSHBUTTON, DRY CIRCUIT MPS1004 (SPDT) & MPS2004 (DPDT) PCB TERMINATION									
		1 P L C ± -		APPLICATION SPEC											
		2 P L C ± -													
		3 P L C ± -													
4 P L C ± -		ANGLES ± -				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL -		FINISH -		WEIGHT -		A1		00779		C1977738		-			
CUSTOMER DRAWING						SCALE		4:1		SHEET		1 of 1		REV B2	