



3D SURROUND AUDIO PROCESSOR FOR HEADPHONE

■ GENERAL DESCRIPTION

The **NJM2703** is a high quality 3D surround audio processor designed for headphone applications.

It includes mode control switch (Surround mode / Bypass mode).

The **NJM2703** features low operating voltage, low operating current, low output noise and very small package, and is suitable for any portable audio applications.

■ PACKAGE OUTLINE




NJM2703RB2
(MSOP10 (TVSP10))

■ FEATURES


- Operating Voltage 1.8 to 6V
- Low Operating Current 0.45mA typ. (at Surround mode, VR: max.)
- Low Output Noise 10 μ V typ. (at Surround mode, VR: max.)
- Variable Surround Effect by external resistor
- Internal Mode Control Switch
- Bipolar Technology
- Package Outline MSOP10 (TVSP10)*

*MEET JEDEC MO-187-DA / THIN TYPE

■ PIN CONFIGURATION

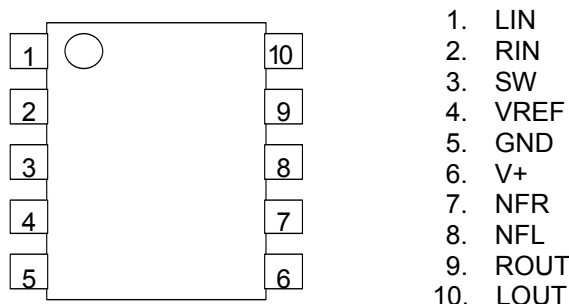

■ BLOCK DIAGRAM

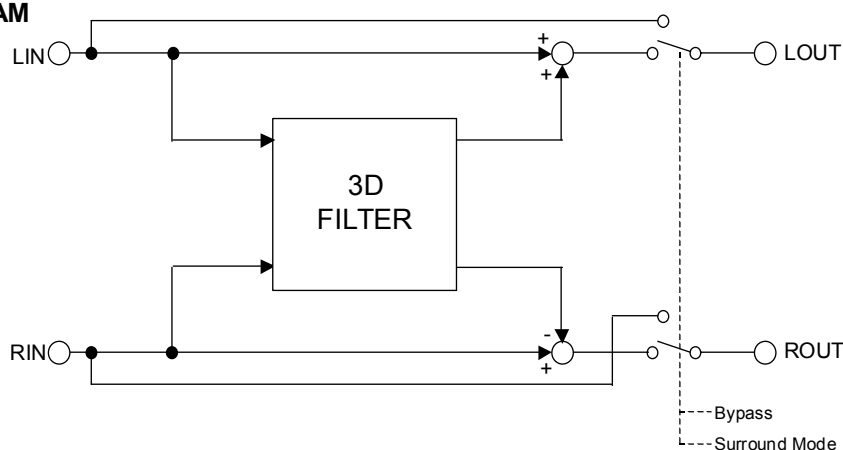

NJM2703

■ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	7	V
Power Dissipation	P _D	320	mW
Operating Temperature Range	T _{opr}	-20 to +75	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

■OPERATING VOLTAGE

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺	-	1.8	3.0	6.0	V

■ELECTRICAL CHARACTERISTICS (V⁺=3V, Ta=25°C unless otherwise specified)

ELECTRICAL CHARACTERISTICS (V _{CC} = 0V, Ta = 25 °C unless otherwise specified)											
PARAMETER	SYMBOL		TEST CONDITION					MIN.	TYP.	MAX.	UNIT
			INPUT		OUTPUT	MODE	VR				
			L	R							
Operating Current	I _{cc}	No Signal	0	0	-	Bypass	-	-	0.45	0.7	mA
			0	0	-	Surround	MAX	-	0.45	0.7	
Reference Voltage	V _{ref}	No Signal	0	0	-	-	-	1.0	1.15	1.3	V

● AC CHARACTERISTICS

(V⁺=3V, Ta=25°C, V_{IN}=-20dBV(100mVrms), f=1kHz, R_L=10kΩ, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT
		INPUT		OUTPUT	MODE	VR					
		L	R								
Maximum Input Voltage	V _{IM}	f=1kHz T.H.D.=1%	V _{IN} 0	0 V _{IN}	L R	Bypass	-	-	-2.0 (790)	-	dBV (mVrms)
		f=100Hz T.H.D.=1%	V _{IN} 0	0 V _{IN}	L R	Surround	MAX	-	-16.0 (160)	-	
		V+=1.8V f=1kHz T.H.D.=1%	V _{IN} 0	0 V _{IN}	L R	Bypass	-	-10.5 (300)	-8.5 (380)	-	
		V+=1.8V f=100Hz T.H.D.=1%	V _{IN} 0	0 V _{IN}	L R	Surround	MAX	-24.5 (60)	-22.5 (75)	-	
Output Noise	V _{NO}	Rg=0Ω A-Weighted	0	0	L R	Bypass	-	-	-112 (2.5)	-106 (5.0)	dBV (μVrms)
		Rg=0Ω A-Weighted	0	0	L R	Surround	MAX	-	-100 (10)	-94 (20)	
Total Harmonic Distortion	T.H.D	f=1kHz	V _{IN} 0	0 V _{IN}	L R	Bypass	-	-	0.02	0.05	%
		f=1kHz	V _{IN} 0	0 V _{IN}	L R	Surround	MAX	-	0.1	0.5	

• AC CHARACTERISTICS

($V_+ = 3V$, $T_a = 25^\circ C$, $V_{IN} = -20dBV(100mV_{rms})$, $f = 1kHz$, $R_L = 10k\Omega$, unless otherwise specified)

V _P = 0V, I _D = 25 mA, V _{IN} = 200mV (100mVrms), f = 1kHz, RE = 10kΩ, unless otherwise specified											
PARAMETER	SYMBOL		TEST CONDITION					MIN.	TYP.	MAX.	UNIT
			INPUT		OUTPUT	MODE	VR				
			L	R							
Bypass Gain	G _{VBYP}	f=1kHz	V _{IN} 0	0 V _{IN}	L R	Bypass	-	-1.0	0.0	1.0	dB
Surround Gain	G _{VSUR}	f=100Hz	V _{IN} 0	0 V _{IN}	L R	Surround	MAX	12.5	14.5	16.5	dB
		f=100Hz	0 V _{IN}	V _{IN} 0	L R	Surround	MAX	10.5	12.5	14.5	
		f=100Hz	V _{IN} 0	0 V _{IN}	L R	Surround	MIN	0.5	2.5	4.5	

• CONTROL CHARACTERISTICS ($V_+ = 3V$, $T_a = 25^\circ C$ unless otherwise specified)

ELECTRICAL CHARACTERISTICS (V+ = 5V, I _A = 20 mA unless otherwise specified)											
PARAMETER	SYMBOL		TEST CONDITION					MIN.	TYP.	MAX.	UNIT
			INPUT		OUTPUT	MODE	VR				
			L	R							
Mode Select Control Voltage	V _{MODE}	V _{IN} = High Level	-	-	-	-	-	1.2	-	V+	V
		V _{IN} = Low Level	-	-	-	-	-	0.0	-	0.3	



■ MODE SWITCH

MODE	SW	NOTES
Bypass	L, open	Input Through
Surround	H	Surround Mode (Stereo Input)

NJM2703


■TERMINAL DESCRIPTION

PIN NO.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	VOLTAGE
1 2	LIN RIN	Rch Input Lch Input		1.15V
3	SW	Mode control switch		0V
4	VREF	Reference voltage		1.15V
5	GND	GND		0V

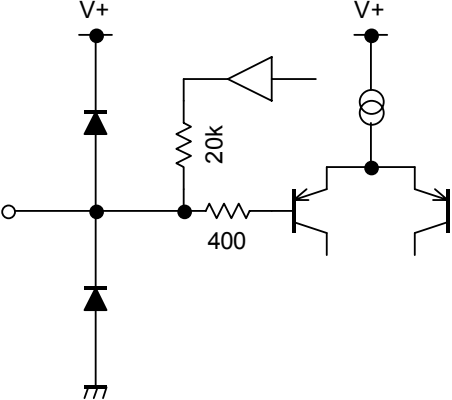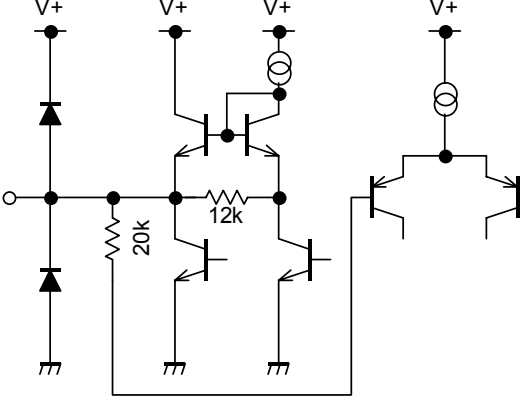PIN NO.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	VOLTAGE
5	V+	Power Supply		V+
7 8	NFL NFR	Filter terminal Filter terminal		1.15V
9 10	ROUT LOUT	Rch Output Lch Output		1.15V

NJM2703


■ APPLICATION CIRCUIT

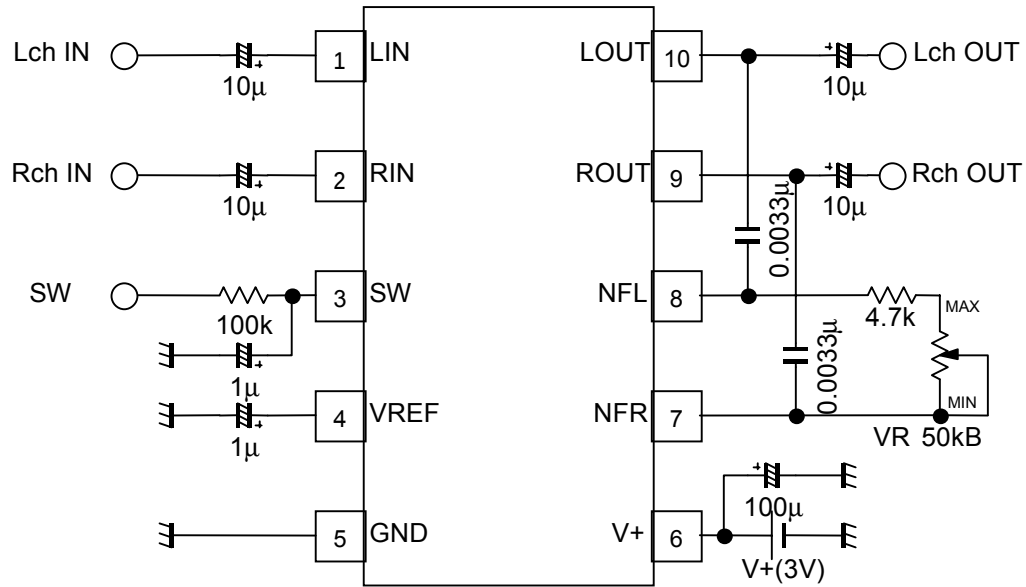

■ TYPICAL CHARACTERISTICS


Supply Current vs. Supply Voltage

Ta=25degrees

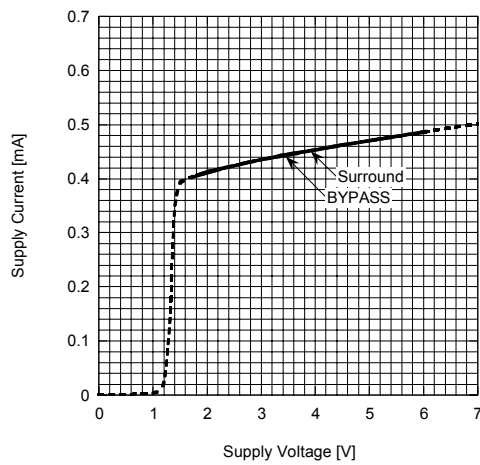


Supply Current vs. Ambient Temperature

V+=3V

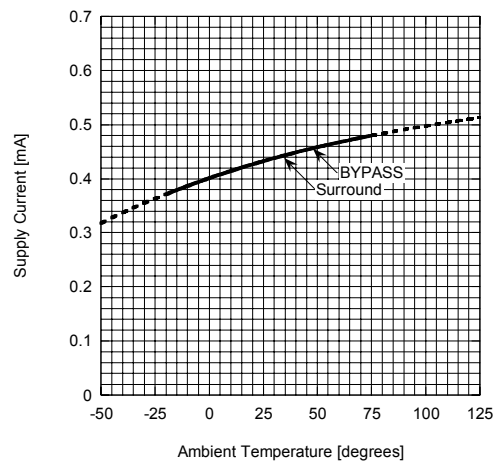


Reference Voltage vs. Supply Voltage

Ta=25degrees

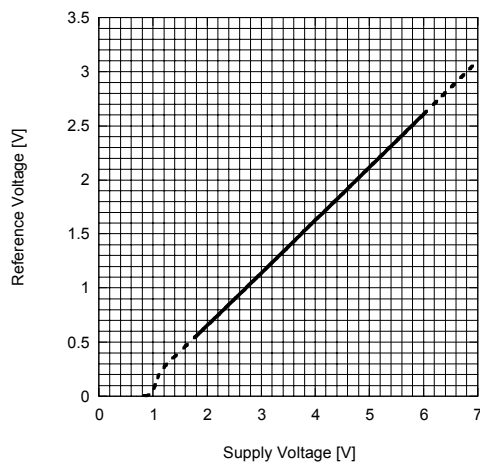


Reference Voltage vs. Ambient Temperature

V+=3V

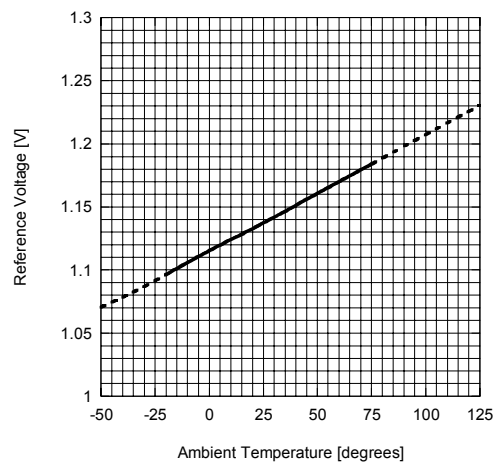


Maximum Input Voltage vs. Supply Voltage (BYPASS)

Vin=Lch f=1kHz Vout=Lch RL=10kohm
THD=1% Ta=25degrees

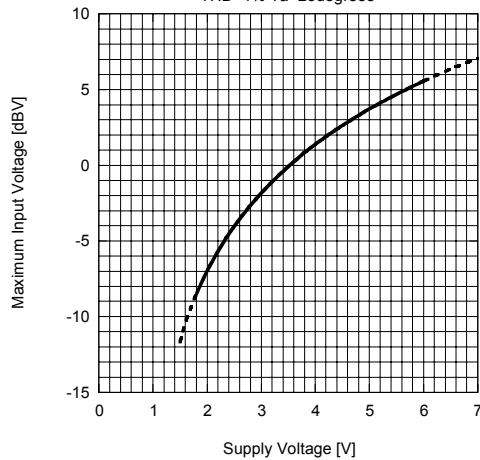

Maximum Input Voltage vs. Supply Voltage (Surround)


Vin=Lch f=100Hz Vout=Lch RL=10kohm VR=MAX
THD=1% Ta=25degrees

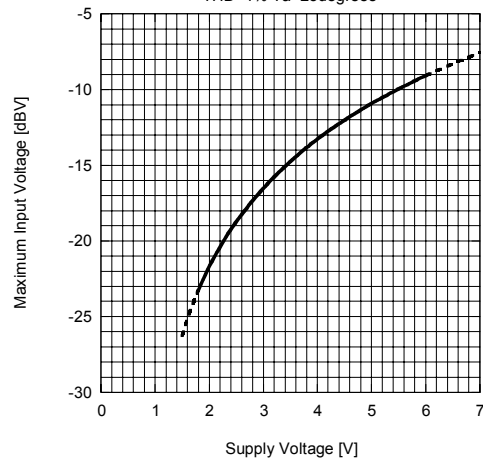

■ TYPICAL CHARACTERISTICS


Maximum Input Voltage vs. Ambient Temperature (BYPASS)

V+=3V Vin=Lch f=1kHz Vout=Lch RL=10kohm
THD=1%

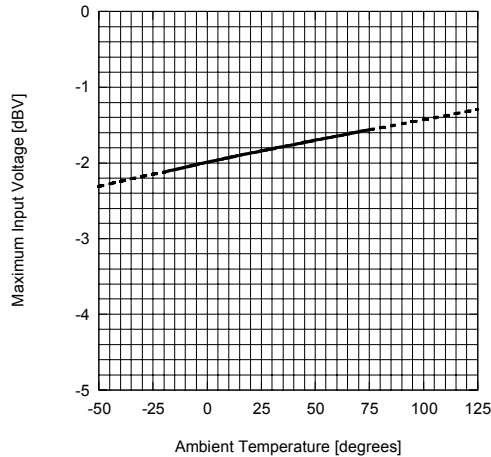


Maximum Input Voltage vs. Ambient Temperature (Surround)

V+=3V Vin=Lch f=100Hz Vout=Lch RL=10kohm
VR=MAX THD=1%

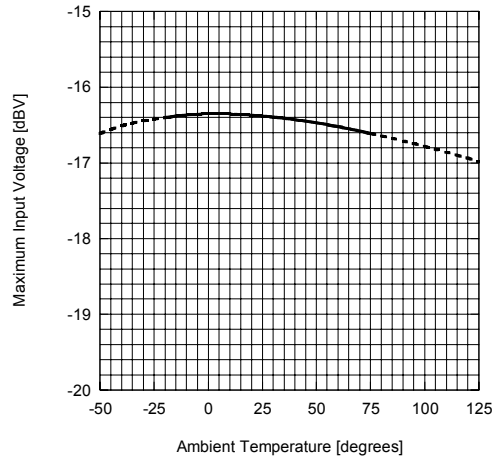


Maximum Input Voltage vs. Ambient Temperature (BYPASS)

V+=1.8V Vin=Lch f=1kHz Vout=Lch RL=10kohm
THD=1%

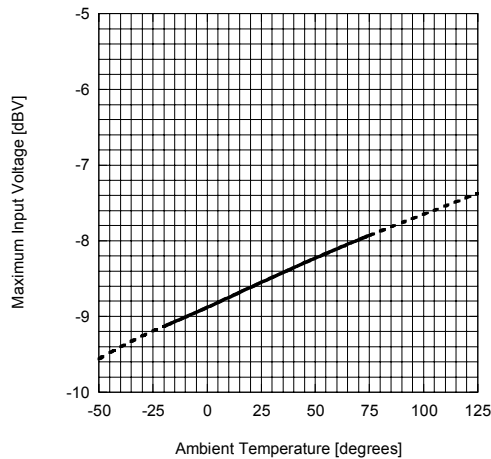


Maximum Input Voltage vs. Ambient Temperature (Surround)

V+=1.8V Vin=Lch f=100Hz Vout=Lch RL=10kohm
VR=MAX THD=1%

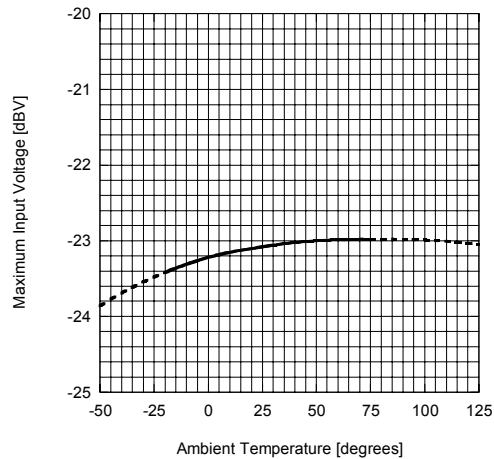


Output Noise Voltage vs. Ambient Temperature

V+=3V Rg=0ohm Vout=Lch VR=MAX
FILTER=A-Weighted

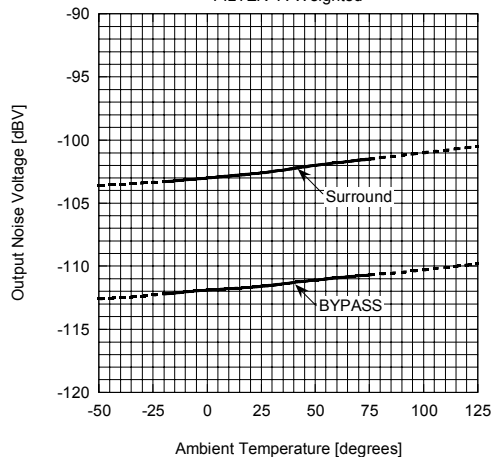


Output Noise Voltage vs. Ambient Temperature

V+=3V Rg=0ohm Vout=Rch VR=MAX
FILTER=A-Weighted

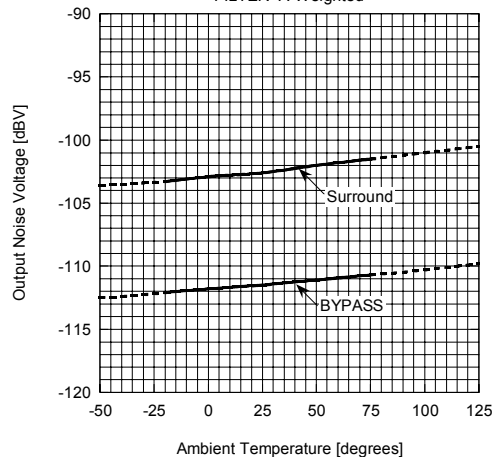


TYPICAL CHARACTERISTICS


Total Harmonic Distortion vs. Input Voltage (BYPASS)

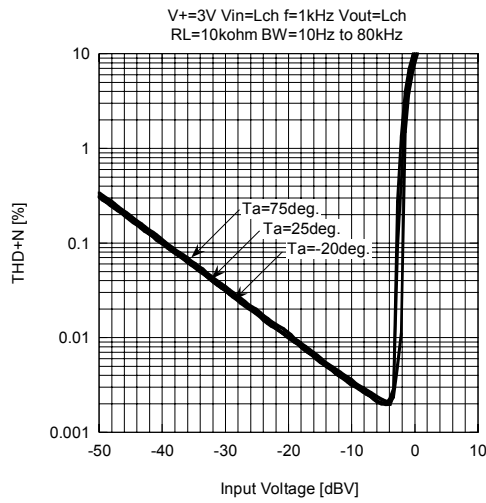


Total Harmonic Distortion vs. Input Voltage (Surround)

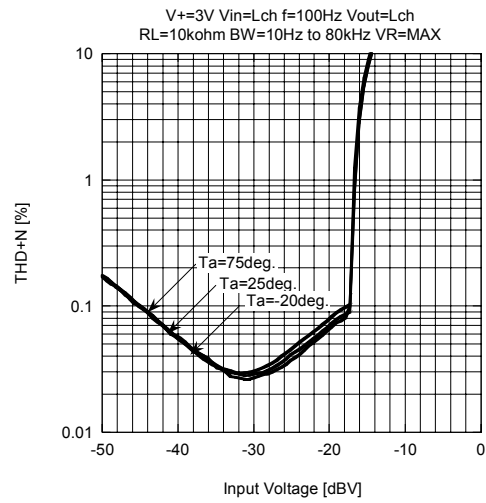


Voltage Gain vs. Frequency (BYPASS)

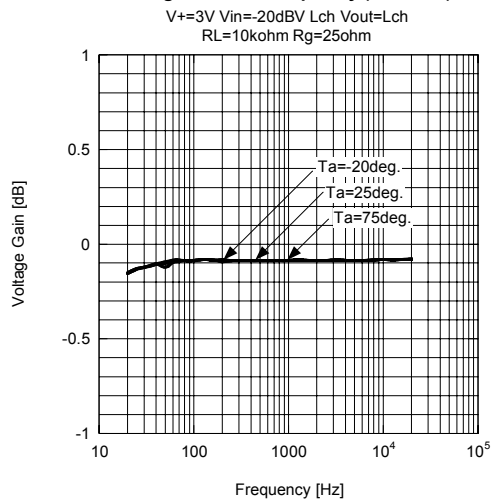


Voltage Gain vs. Frequency (Surround)

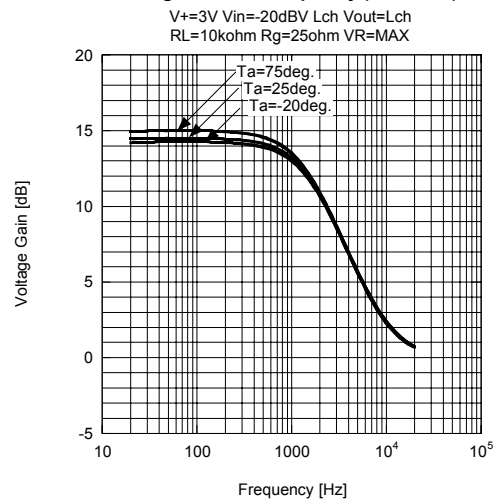



Voltage Gain vs. Frequency (Surround)

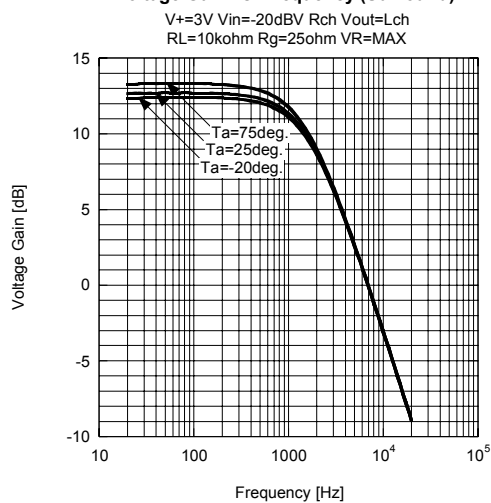

Voltage Gain vs. Frequency (Surround)

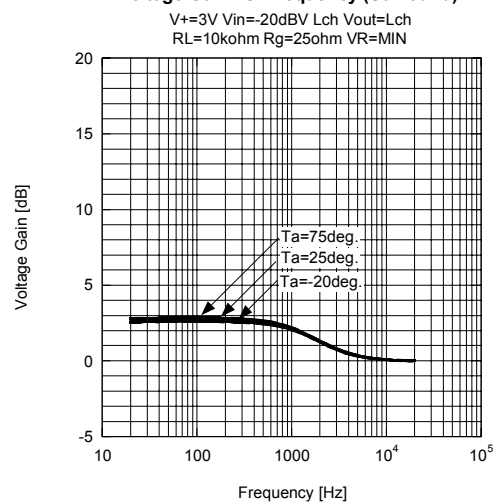

TYPICAL CHARACTERISTICS

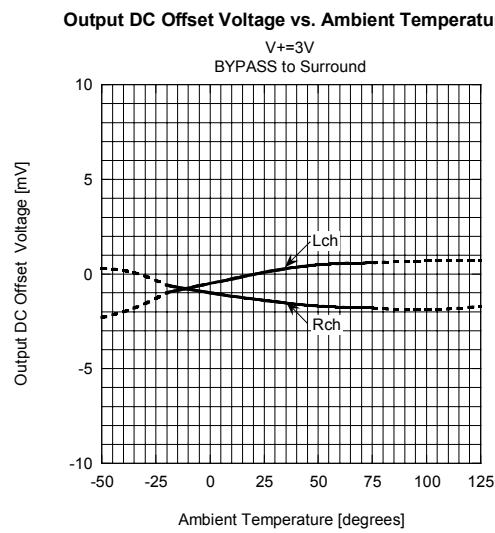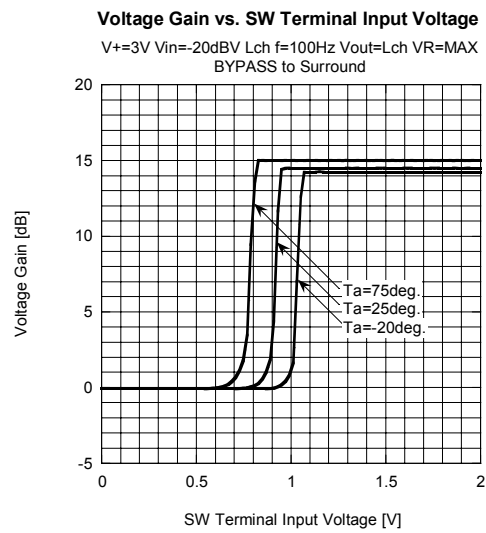

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2703RB2-TE1](#)