


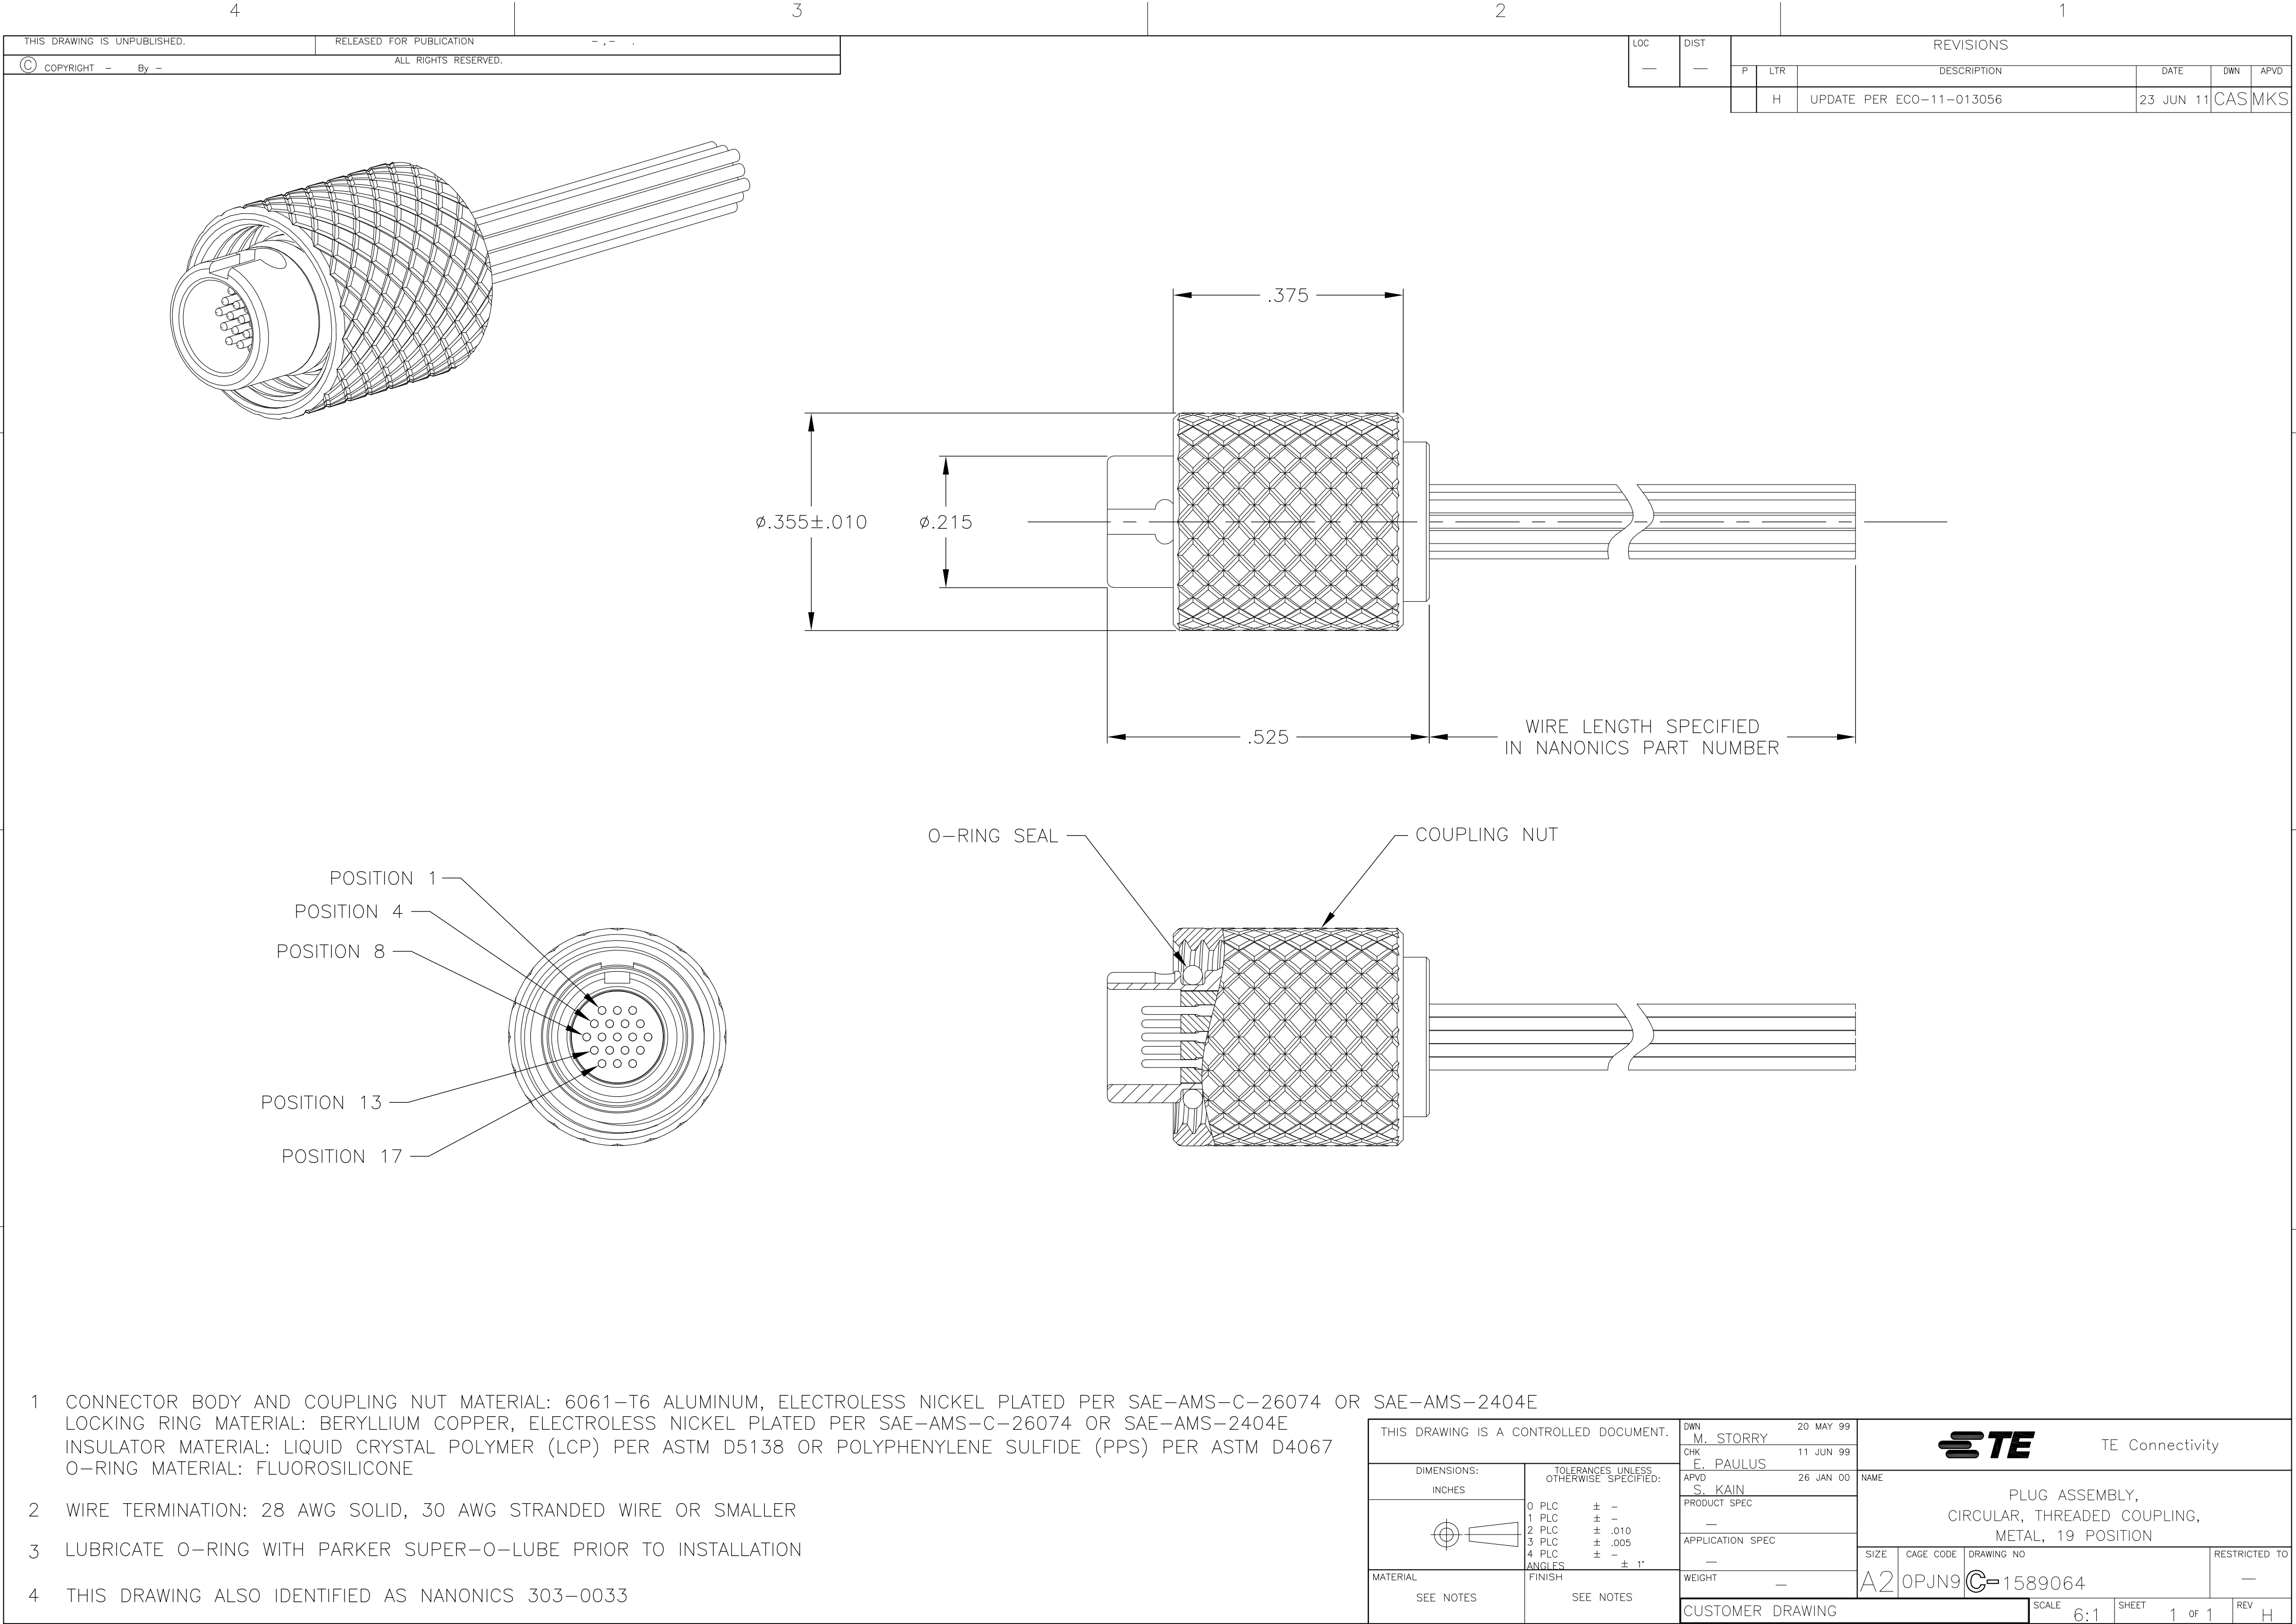

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	H	UPDATE PER ECO-11-013056		23 JUN 11	CAS	MKS	

- 1 CONNECTOR BODY AND COUPLING NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
- 2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
- 3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0033

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY	20 MAY 99	 TE Connectivity					
		CHK E. PAULUS	11 JUN 99						
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. KAIN	26 JAN 00	NAME PLUG ASSEMBLY, CIRCULAR, THREADED COUPLING, METAL, 19 POSITION					
	0 PLC ± -	PRODUCT SPEC	—						
	1 PLC ± -	APPLICATION SPEC	—						
	2 PLC ± .010								
	3 PLC ± .005	—	—						
	4 PLC ± -								
	ANGLES ± 1°								
MATERIAL	FINISH	WEIGHT	—	A2	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
SEE NOTES	SEE NOTES			0PJN9	C=	1589064		—	
CUSTOMER DRAWING				SCALE	6:1	SHEET	1 of 1	REV	H