


# Female Circuit Board Posts - Self Threading

561-FSTP250, 561-FSTP375, 561-FSTP500,  
561-FSTP625, 561-FSTP750, 561-FSTP875,  
561-FSTP1000

Date Last Revised: 5-12-09

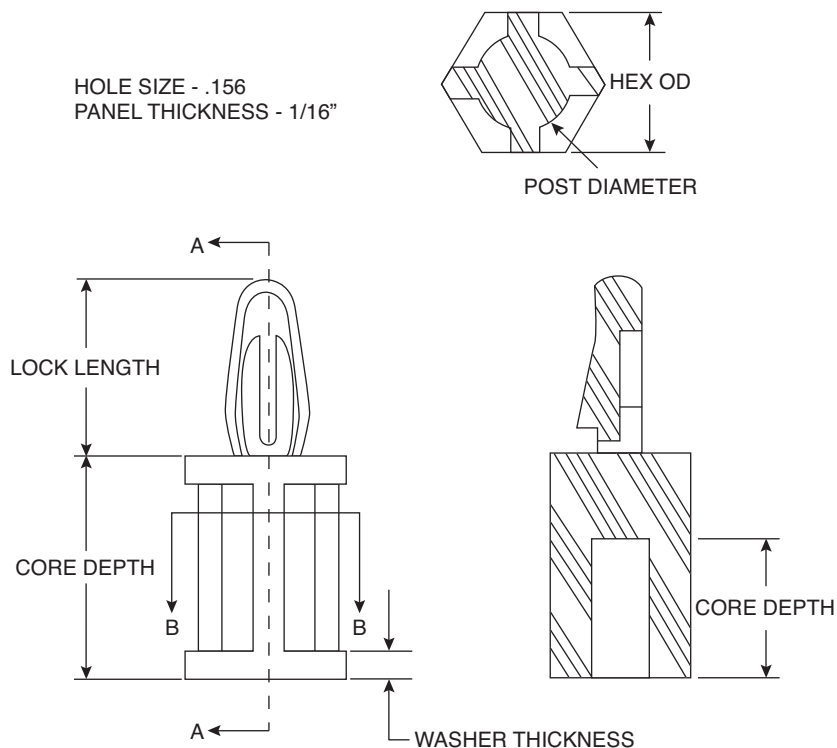

NOTE: Self Threading Posts are designed for use with a #6 self-tapping screw.

**RoHS Compliant**

## Specifications

| Head Dia. A  | Description | Hex OD          | Washer Thickness | Lock Length | Post Diameter  | Core Depth | Hole Size | Panel Thickness | Body Length     |
|--------------|-------------|-----------------|------------------|-------------|----------------|------------|-----------|-----------------|-----------------|
| 561-FSTP250  | FSTP 250    | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .062            | .250(+/- .015)  |
| 561-FSTP375  | FSTP 375    | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .620            | .375(+/- .015)  |
| 561-FSTP500  | FSTP 500    | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .062            | .500(+/- .015)  |
| 561-FSTP625  | FSTP 625    | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .062            | .625(+/- .015)  |
| 561-FSTP750  | FSTP 750    | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .062            | .750(+/- .015)  |
| 561-FSTP875  | FSTP 875    | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .062            | .875(+/- .015)  |
| 561-FSTP1000 | FSTP 1000   | .312 (+/- .015) | .062 (+/- .015)  | .400*(ref.) | .218(+/- .015) | .312       | .156      | .062            | 1.000(+/- .015) |

## Description

- Material - molded in natural nylon 6/6

**Available from Mouser Electronics**  
**1-800-346-6873 / [www.mouser.com](http://www.mouser.com)**

EPD-200795