


DRAWING MADE IN THIRD ANGLE PROJECTION

© COPYRIGHT 1974 BY AMP INCORPORATED, HARRISBURG, PA.
ALL INTERNATIONAL RIGHTS RESERVED. AMP INCORPORATED PRODUCTS
COVERED BY U. S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

206638-2	AS SHOWN ON STRIP (STATUS OBSOLETE)	PLATE PER NOTE 3
206638-3	AS SHOWN LOOSE PIECE (STATUS OBSOLETE)	PLATE PER NOTE 3
5-206638-2	AS SHOWN ON STRIP (RoHS COMPLIANT)	PLATE PER NOTE 4
5-206638-3	AS SHOWN LOOSE PIECE (RoHS COMPLIANT)	PLATE PER NOTE 4

REVISIONS					
REV.	ZONE	LTR	DESCRIPTION	DATE	APPROVED
0			RELEASED WAS 5089-2	1/30/74	DEM
A			REV. PER ECN D-045	5/27/74	S.J.
B			REV. PER ECN J-876	1/4/83	DE
C			REV. PER ECN R-720	10-17-84	MPH BV
D			REV./ECN R-1917	3-4-86	MPH MK
E			ADDED -3/ECN R-2735	2-2-87	RL THW
F			REVISED ECN 54620	5-10-88	THW
G			REVISED ECN 54712	7-7-88	THW
H			REVISED PER ECR-16-018092	12-12-16	PO

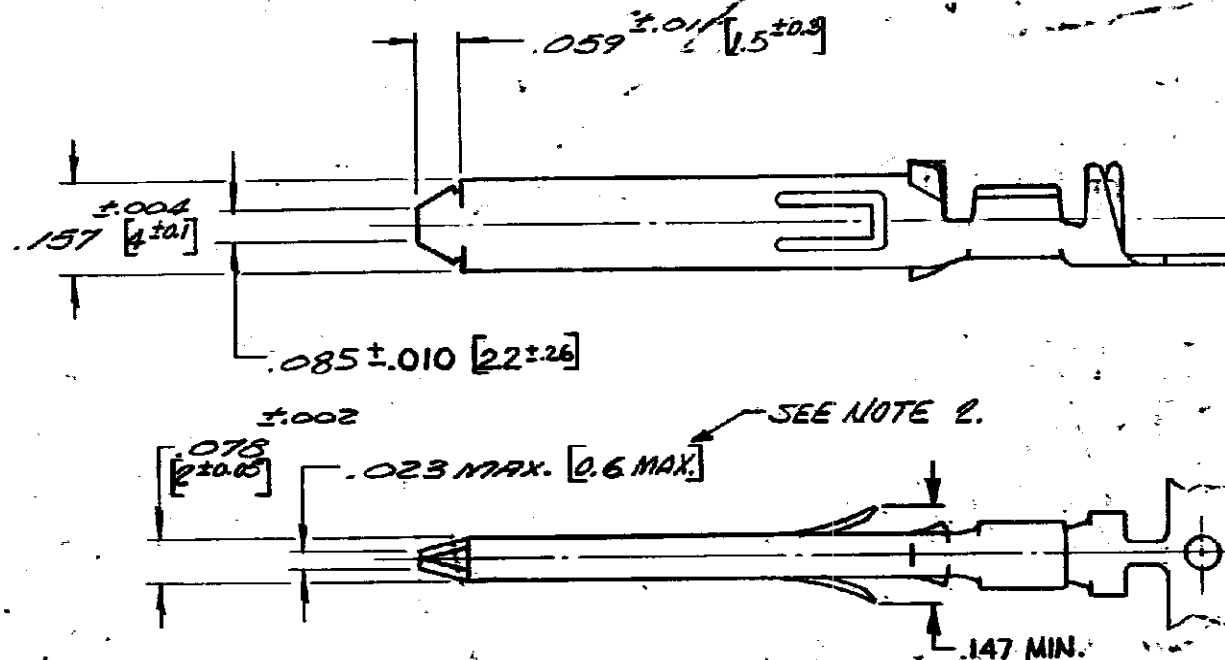

CONTACT U.L. LISTED FOR 15 AMPS. 250 VOLTS
WITH 16 AWG WHEN USED IN AMP INC.
HOUSING NO. 206637-1.

1. ACCOMMODATES 20-18-16 AWG, INSULATION
RANGE .080/.135 DIA.

2. FIGURES SHOWN IN BRACKETS REPRESENT
DIMENSIONS IN MILLIMETERS.

3. FINISH: TIN .000050 MIN. THICK PER MIL-T-10727 OVER NICKEL
(FLASH) PER QQ-N-290. PLATING THICKNESS POINT OF MEASUREMENT
EQUALS 1/2 CONTACT LENGTH.

4. FINISH: TIN (WHISKER MITIGATED, LEAD-FREE) .000050 MINIMUM
THICKNESS PER ASTM-B545-13 OVER NICKEL FLASH PER QQ-N-290.
POINT OF MEASUREMENT EQUALS 1/2 CONTACT LENGTH.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± ANGLES ±		CONTRACT NO.	PART NO.	
MATERIAL		DR. <i>DEEM</i> 12-28-73	TE Connectivity	
FINISH		CHK. <i>DEM</i> 4/30/74	NAME	
SEE TABLE		APPR. <i>DS</i> 4/20/74	PIN CONTACT - POWER	
		DSGN. <i>DEM</i> 4/30/74	CORD RECP. (CRIMP)	
		OTHER APPD.	SIZE	CODE IDENT NO.
			B	00779
			SCALE	NUMBER
			2-1	206638
				SHEET 1 OF 1