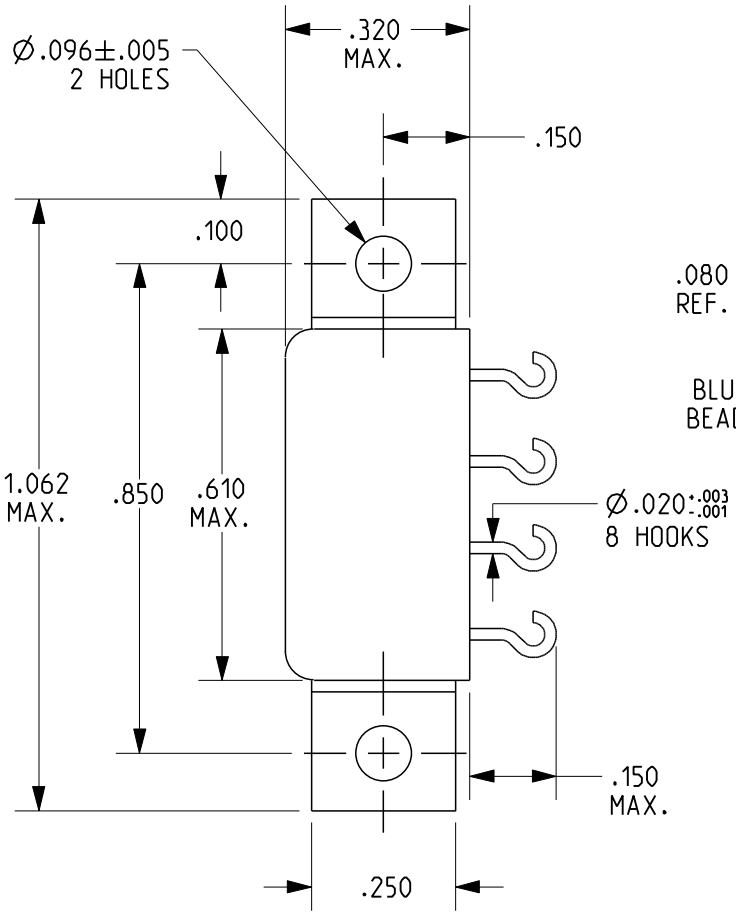

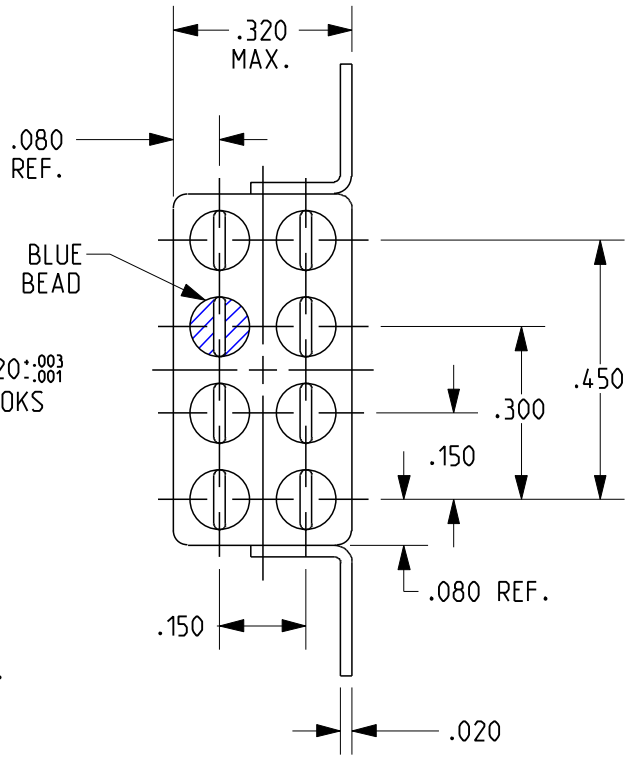

REV. B

DCO 131316

TOL. = ±.010

COIL: @ 25°C

RESISTANCE 1350 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.5 VDC

MUST RELEASE 8.7 VDC MAX., 1.6 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
RELEASE 6 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

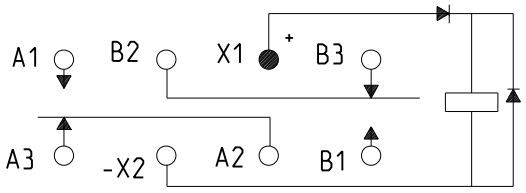

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50.000 OPERATIONS

DR. B.D. 26MAR2007 | CK. J.M.B. 9/28/10

Tyco Electronics

©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL

CUST. NO. M39016/38-023L REV.

TE NUMBER 1-1617515-8

CII PART NUMBER 3SBC1683A2