

6

5

4

3

2

1

E

E

D

D

C

C


B

B

A

A


SIDE ONE (2) NEMA L5-20

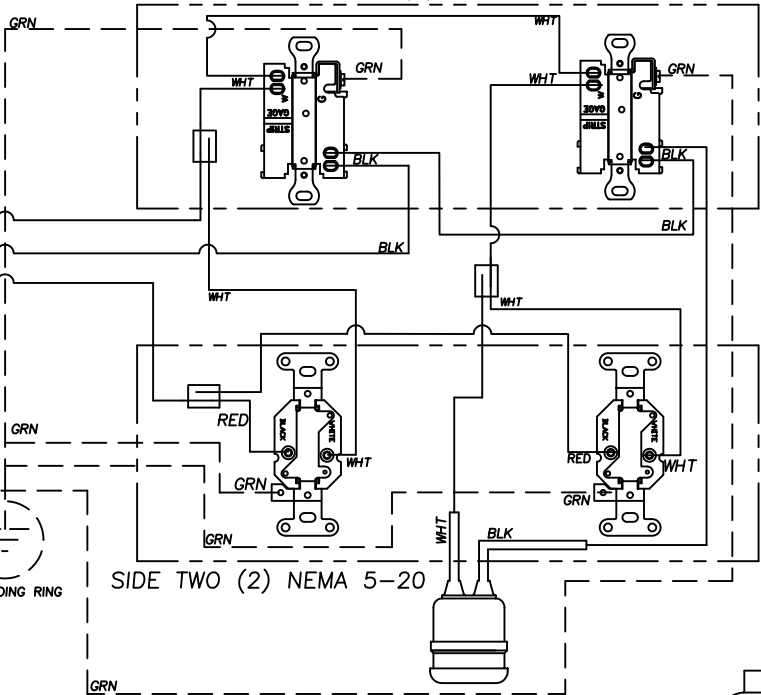


SIDE TWO (2) NEMA 5-20



GROUNDING RING



BACK VIEW OF MALE INSERT



(1.95 IN) (5.0 CM)

(3.00 IN) (7.6 CM)


1 FT. YELLOW #12-4 CABLE

MAX-LOC MESH GRIP

FLIP-LID COVERPLATE


RUBBER WATERTITE HUSK

COMPRESSION NUT FRICTION RING GROMMET



FACE VIEW OF MALE INSERT

NEMA L14-20

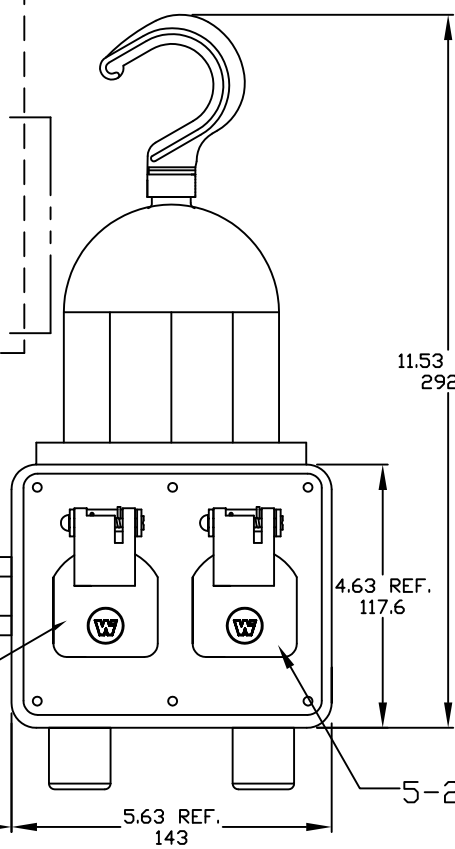


11.53 REF. 292.9

4.63 REF. 117.6

1.66 REF. 42.2

5.63 REF. 143

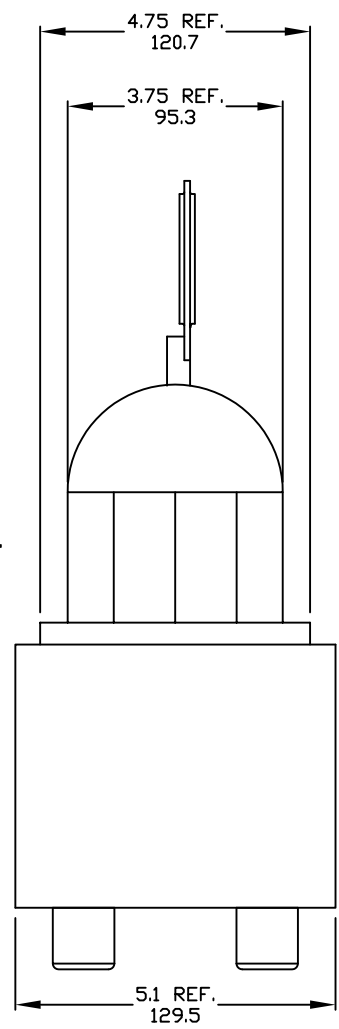

4.75 REF. 120.7

3.75 REF. 95.3

5.1 REF. 129.5

<b>CUSTOMER DRAWING</b> EC NO: WNA2010-0290 DRWN: HKNEELAN 10/23/09 CHKD: HKNEELAN 2009/11/16 APPR: DTTITUS 2009/11/23 REV DESCRIPTION	<b>QUALITY SYMBOLS</b> ▽=0 ▽C=0	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b> <table border="1"> <tr> <td></td> <td>mm</td> <td>INCH</td> </tr> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±---</td> <td>±---</td> </tr> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±---	1 PLACE	±---	±---	<b>DIMENSION STYLE</b> INCH DRAWN BY DATE CHECKED BY DATE HKNEELAN 2009/11/16 APPROVED BY DATE DTTITUS 2009/11/20 MATERIAL NO. 1301350369	<b>SCALE</b> NTS <b>DESIGN UNITS</b> INCH <b>THIRD ANGLE PROJECTION</b>	<b>TITLE</b> ILLUMINATED OUTLET BOX 1' #12-4 CABLE NEMA(2) L5-20 & (2) 5-20 <b>MOLEX INCORPORATED</b> DOCUMENT NO. SD-130135-026 SHEET NO. 1 OF 1
		mm	INCH																	
	4 PLACES	±---	±---																	
	3 PLACES	±---	±---																	
	2 PLACES	±---	±---																	
1 PLACE	±---	±---																		
<b>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</b>		<b>SIZE</b> A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	

6

5

4

3

2

1