

4

3

2


1

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION.		ALL RIGHTS RESERVED.	
HOUSING HOUSING ADAPTER CAP	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NI PLATE PER QQ-N-290	
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35	
DIELECTRIC	TFE FLUOROCARBON PER MIL-P-19468 AND FED SPEC L-P-403	N/A	
CENTER CONTACT	BERYLLIUM COPPER PER QQ-C-530, ALLOY 173	GOLD PLATE PER MIL-G-45204 OVER Cu PLATE PER MIL-C-14550	
RETAINING RING	BERYLLIUM COPPER PER QQ-C-533	N/A	
GASKET	SILICONE RUBBER PER ZZ-R-765,CLASS 2B	N/A	
COMPONENT	MATERIAL	FINISH	

LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REV PER ECO-07-010180	07JUN07	PY	DW

LOCKWIRE HOLES
Ø.016
[0.41] MIN 3 PLC
EQUALLY SPACED

"SMA" PLUG

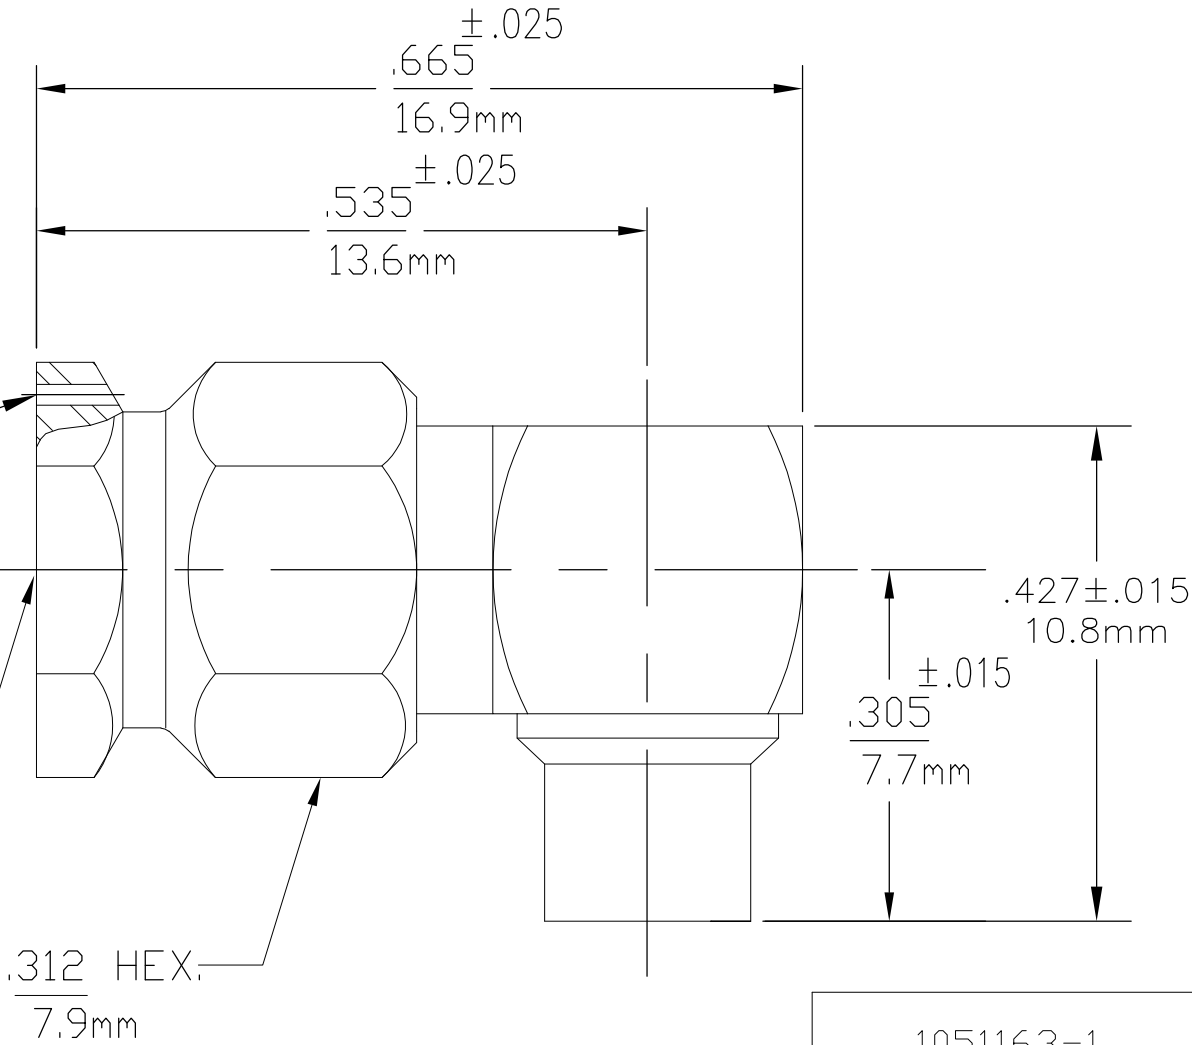

1. CAPTURED CENTER CONTACT

DESIGNED FOR USE WITH RG 405 (.085) CABLE	
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	.089
CONTACT	.0374

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. YEAGER 04JUN2007	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK D. WILSON 07JUN07				
		APVD D. WILSON 07JUN07	NAME OSM RIGHT ANGLE CABLE PLUG DIRECT SOLDER ATTACHMENT M39012/ 80-3003 CAT B			
		PRODUCT SPEC				
		APPLICATION SPEC				
		WEIGHT				
		CUSTOMER DRAWING				
		SCALE	5:1			
		SHEET	1 OF 1			
		REV	A			