


SPECIFICATION CONTROL DRAWING

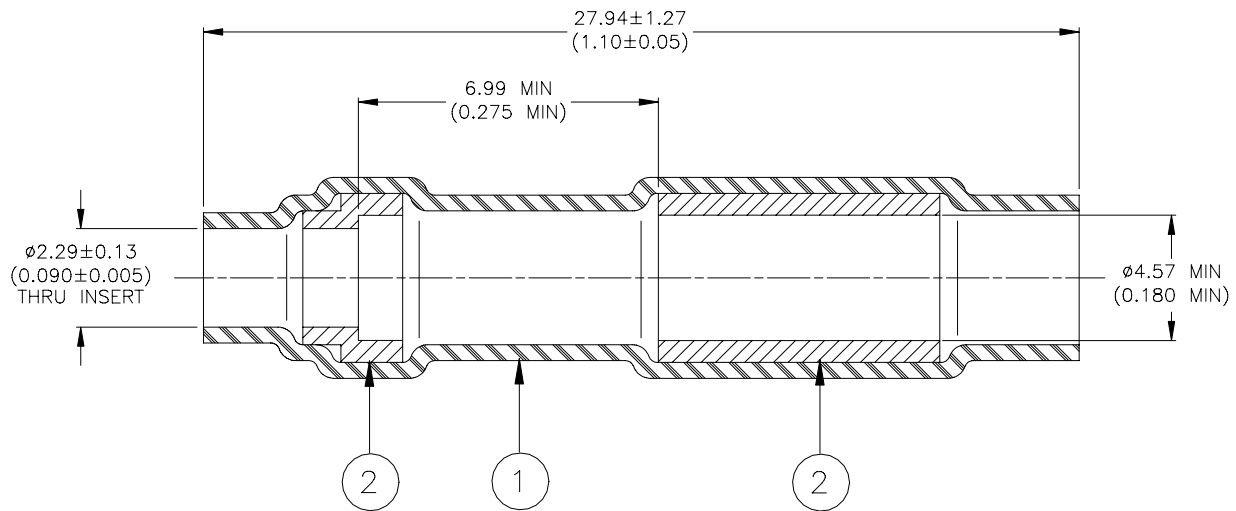

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
Recovered Dimensions: I.D.: 2.41 (0.095)
Wall Thickness: 0.33 min. (0.013 min)
2. SEALING INSERTS: Fluorocarbon-based thermoplastic, Color: natural.

APPLICATION

1. This part is designed to provide an environment resistant seal on stub or parallel splices, having no more than two wires, rated for at least 135°C, exiting from either end of sleeve.
2. To install part, make crimp in usual manner and insert into sleeve so that crimp barrel enters end of tapered insert. Heat sleeve using a Raychem approved convection heater. Apply heat first to large end of sleeve until the insert flows along the wires, then heat other insert until it flows.
3. Maximum weight of part: 0.47 grams.

<div>Raychem Interconnect</div> <div>a division of tyco Electronics</div> <div>300 Constitution Drive</div> <div>Menlo Park, CA 94025, USA</div>		THERMOFIT DEVICES		TITLE : SEALING SLEEVE, STUB SPLICE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: D-436-45			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D000567		REPLACES: N/A	
DRAWN BY: M. FORONDA		DATE: 02-Oct-00	PROD. REV. K	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.