


D



C

B

A

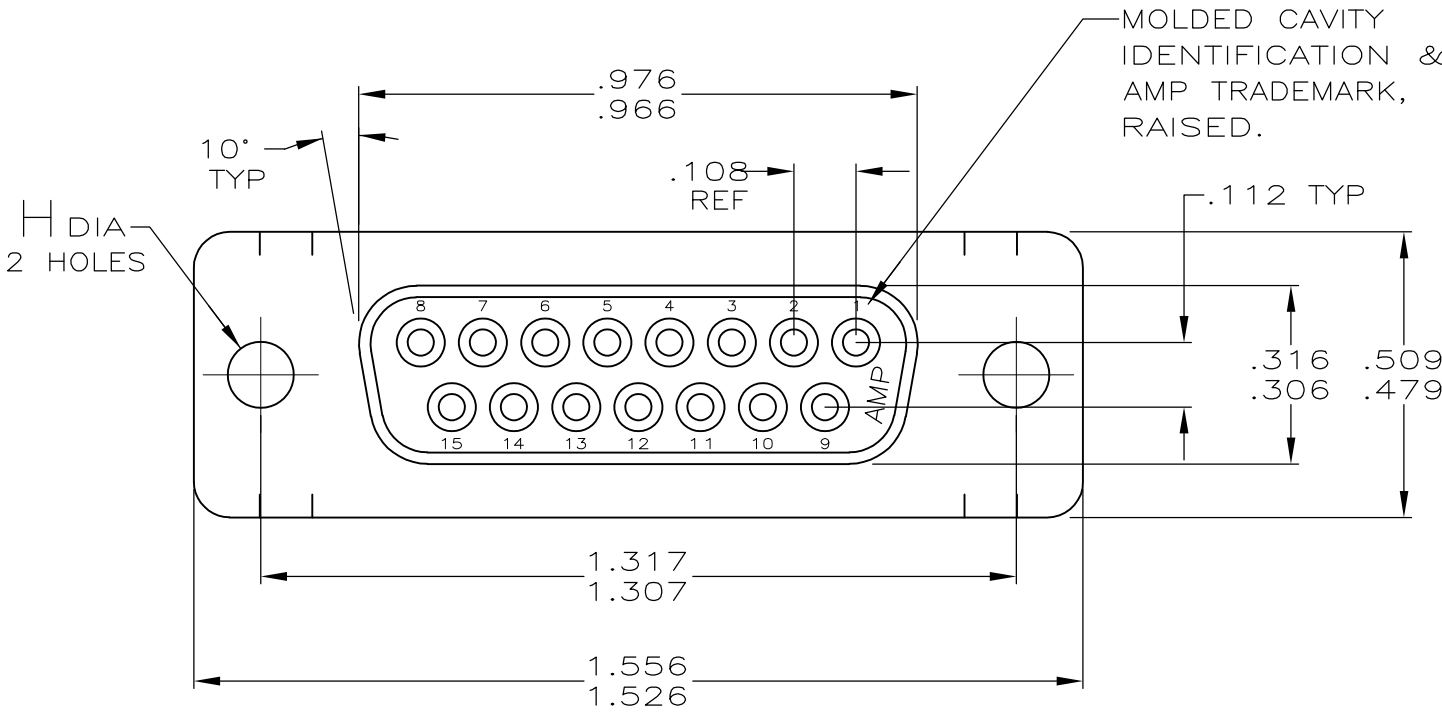


SHELL, STEEL, PER QQ-S-698 BRIGHT-TIN PLATED PER MIL-T-10727.

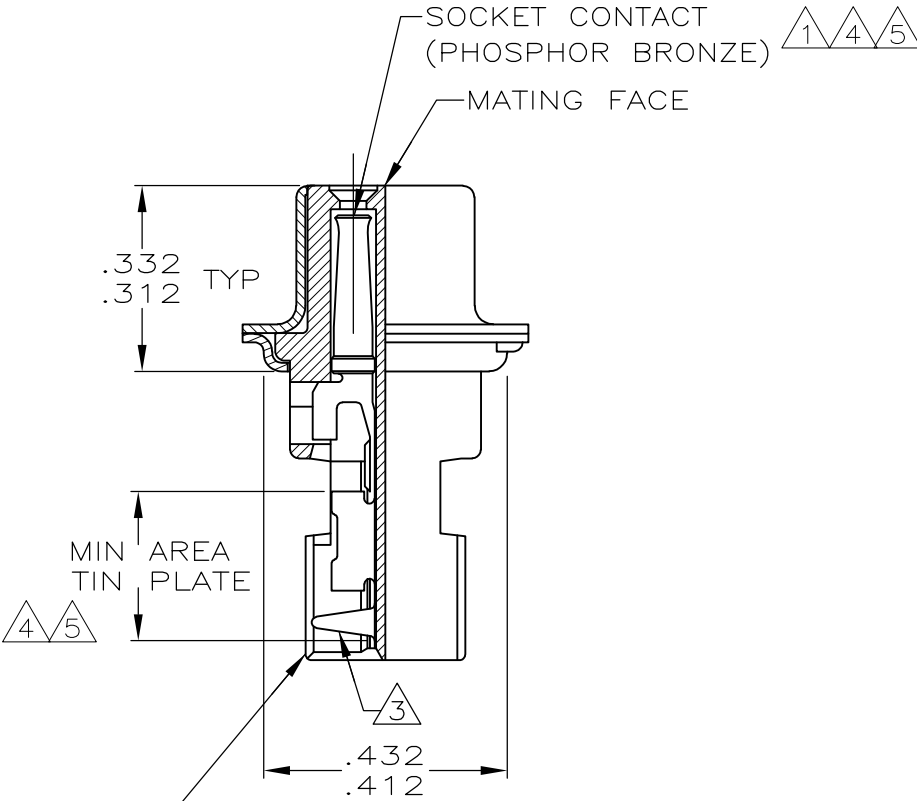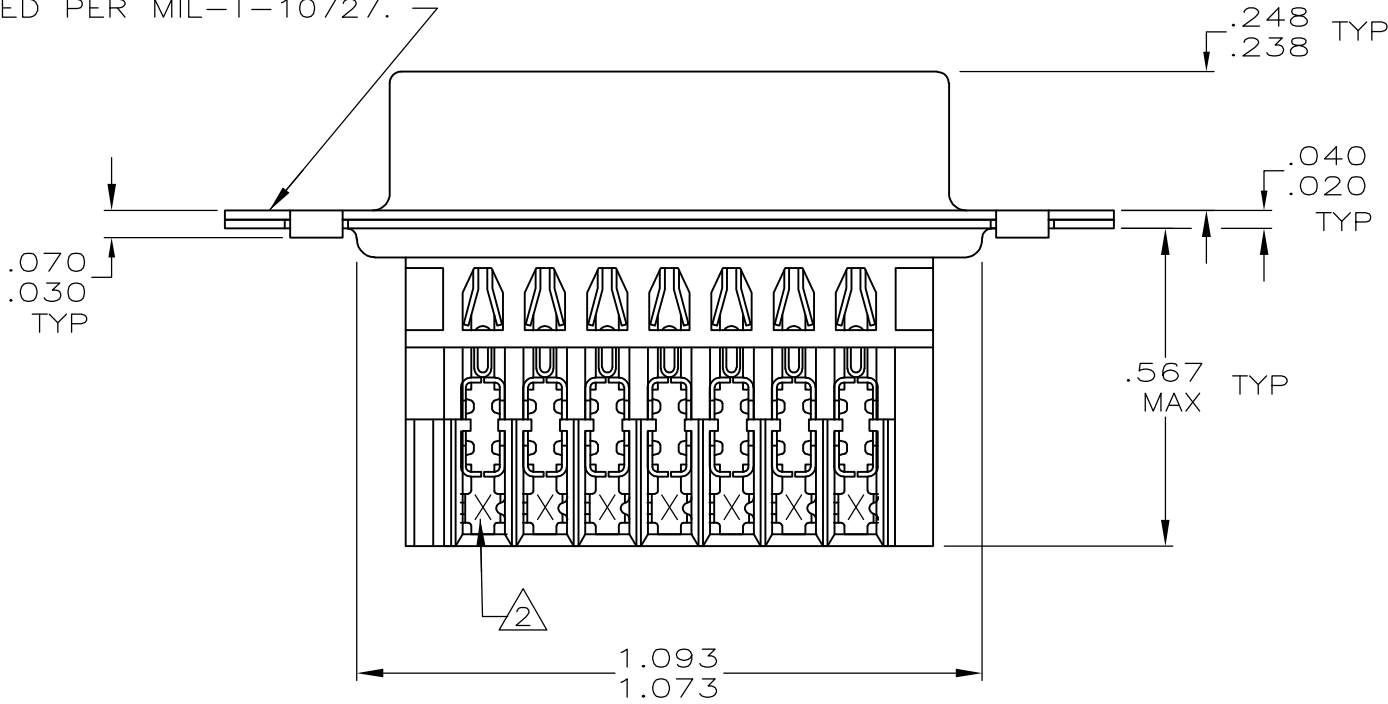

- 1 HOUSING FULLY LOADED WITH CONTACTS.
- 2 NUMBER ON CONTACT INDICATES WIRE RANGE.
- 3 CONTACT INSULATION RANGE: .060 MAXIMUM O.D.
- 4 .000030 GOLD ON MATING END FOR .100 MIN LENGTH. .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN AREA SHOWN. .000050 NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 5 .000001 MIN GOLD ON MATING END FOR .100 MIN LENGTH. .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN AREA SHOWN. .000030 NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 6 SUPERSEDED BY 745493-1
- 7 SUPERSEDED BY 745493-5
- 8 OBSOLETE
- 9 .000030 GOLD ON MATING END FOR .100 MIN LENGTH. .000100-.000200 MATTE TIN IN AREA SHOWN. .000050 NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 10 .000001 MIN GOLD ON MATING END FOR .100 MIN LENGTH. .000100-.000200 MATTE TIN IN AREA SHOWN. .000030 NICKEL UNDERPLATE ON ENTIRE CONTACT.

STANDARD	.125 .115	9	1	#26-30	1-745493-6
STANDARD	.125 .115	10	2	#22-26	1-745493-5
STANDARD	.125 .115	9	2	#22-26	1-745493-4
SMALL PACK	.125 .115	5	2	#22-26	1-745493-3
STANDARD	.156 .146	5	3	#20-22	1-745493-2
			2	#22-26	1-745493-1
			1	#26-30	1-745493-0
STANDARD	.156 .146	4	3	#20-22	745493-9
			2	#22-26	745493-8
			1	#26-30	745493-7
STANDARD	.125 .115	5	3	#20-22	745493-6
			2	#22-26	745493-5
			1	#26-30	745493-4
STANDARD	.125 .115	4	3	#20-22	745493-3
			2	#22-26	745493-2
			1	#26-30	745493-1
PACKAGING	H	CONTACT FINISH	2	AWG WIRE RANGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - 11-16-04 CHK J. GERACE 11-16-04 APVD M. WALMSLEY 11-16-04		 TE Connectivity		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:				
		PRODUCT SPEC 108-40011		SIZE A2		
		APPLICATION SPEC 114-40002				
MATERIAL SEE CALL OUT		WEIGHT -		DRAWING NO C-745493		
FINISH SEE TABLE		CUSTOMER DRAWING				
				SCALE 3:1		
				REV L3		