

PCB terminal block - MKDS 1/ 2-3,5-HT BK P1,65 R24 - 1710619

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 13.5 A, nom. voltage: 200 V, pitch: 3.5 mm, number of positions: 2, connection method: Screw connection with tension sleeve, mounting: THR soldering, color: black. This article can be soldered in the reflow furnace together with SMD components.

The figure shows standard version

Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Extremely small design for the respective conductor cross section
- ✓ Designed for integration into the SMT soldering process

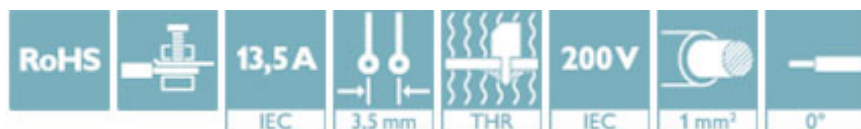

Key Commercial Data

Packing unit	140 pc
GTIN	 4 055626 166247
GTIN	4055626166247

Technical data

Dimensions

Pitch	3.5 mm
Solder pin [P]	3.5 mm
Pin spacing	3.5 mm
Hole diameter	1.1 mm

General

Range of articles	MKDS 1/...-HT
Insulating material group	IIIa
Rated voltage (III/2)	200 V
Nominal current I_N	13.5 A
Nominal cross section	1 mm²

PCB terminal block - MKDS 1/ 2-3,5-HT BK P1,65 R24 - 1710619

Technical data

General

Flammability rating according to UL 94	V0
Number of positions	2

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>