

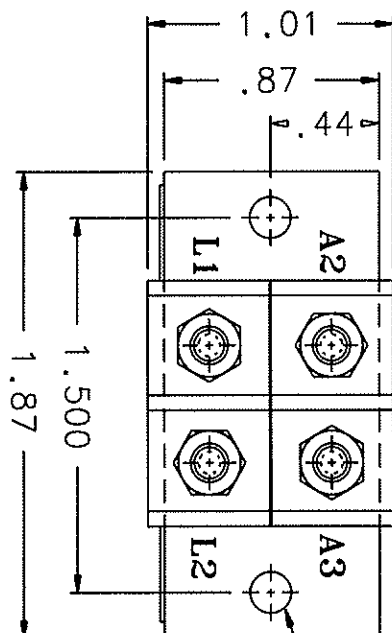


REVISIONS		RELEASED	REV.
REV.	DESCRIPTION	DATE	APPROVED
H	40460 REDRAWN, *MAX* ADDED TO .59.	99/09/27	RS
J	41494 *MAX* ADDED TO .76 & 1.03	00/02/01	RS

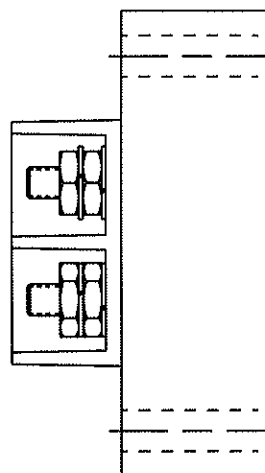


2 .166 DIA. HOLE
2 MTG HOLES

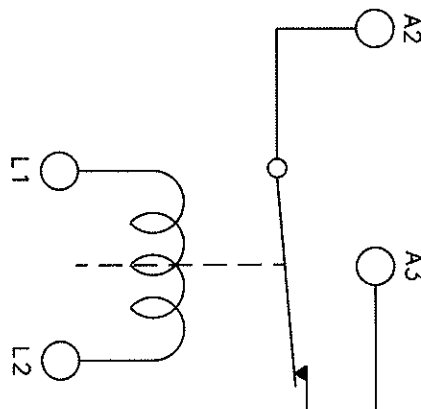

OPERATING CHARACTERISTICS
PICKUP 3 1/2 AMPS D.C. MAX.
DROPOUT 1 1/2 AMP MIN
CONTINUOUS 20 AMPS MAX

MAX. WEIGHT 1.25 OZ.
TEMP -55°C TO +71°C
VIBRATION 10 G's TO 500HZ
ALTITUDE 50,000 FT. MAX.
CONTACT RATING .25 AMP RES. 28 VDC
LAMP LOAD .08 AMP 28 VDC

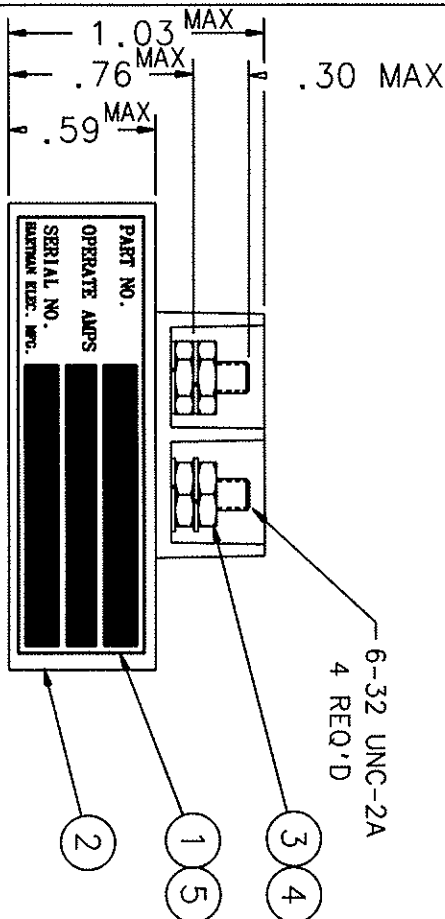

6-32 UNC-2A
4 REQ'D

QTY	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	CAGE NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
5	1 39529-024	OVERLAY			
4	4 51806-014	WASHER - LOCK NO. 6 SPLIT			
3	4 50406-034	NUT 6-32 X 1/4 X 5/64 HEX.			
2	1 35190-010	RELAY ASSEMBLY - PRIMARY			
1	1 34246-001	PLATE - NAME			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES IN
2 PL DEC. 13 PL DEC. ANGLES
* .06 * .010 * 1°
MATERIAL

DR BY RLS 00/02/25
CHK BY RLS 00/02/25
ENGR 00/02/25
MFG 00/02/25
RELEASE
CONTR NO.
GOVT APPVL

HARTMAN ELECTRICAL MANUFACTURING
MASTFIELD, OHIO
RELAY - CURRENT INDICATOR
20 AMP CONTINUOUS
093

SIZE CODE IDENT DWG NO.
C 74063 Q-50A

SCALE NONE SHEET