




- Lock securely and adhere to most clean, dry surfaces.
- Part No. 3309 maximum flat wire height .50" (12,7 mm), width 1.25" (31,8 mm)
- Part No. 3395 maximum flat wire height .25" (6,4 mm), width 1.25" (31,8 mm)
- Part No. 3397 maximum flat wire height .25" (6,4 mm), width 2.50" (63,5 mm)

HEYClip™ Hinged Cable Holders

| WIRE CAPACITY | | PART NO. Natural | DESCRIPTION | PART DIMENSIONS | | | | | | | | |
|--|-------------|---------------------|---------------|--------------------------|-------------------------|--------------------------|------------------------------|--|--|--|--|-------------|
| in. | mm. | | | A Length in. mm. | B Width in. mm. | C Height in. mm. | D MH Spacing in. mm. | | | | | |
| Double Arrowhead Mount For Panels from .030" (0,8 mm) to .039" (1,0 mm) Thick | | | | | | | | | | | | |
| .37 x 1.11 | 28,1 x 9,3 | 12136 | CH H-37-111 | 1.57 40,0 | .31 8,0 | .52 13,3 | .787 20,0 | | | | | NEW! |
| For Panels up to .118" (3,0 mm) Thick | | | | | | | | | | | | |
| .55 x .75 | 19,1 x 13,9 | 12139 | CH H-55-75 | 1.22 31,0 | .31 8,0 | .73 18,6 | .630 16,0 | | | | | NEW! |
| Adhesive Back Mount | | | | | | | | | | | | |
| .25 x 1.25 | 5,6 x 31,8 | 3395 | CH HA-25-125* | 1.75 44,5 | .75 19,1 | .50 12,7 | | | | | | |
| .50 x 1.25 | 11,2 x 31,8 | 3309 | CH HA-50-125* | 1.75 44,5 | .75 19,1 | .75 19,1 | | | | | | |
| .25 x 2.50 | 12,7 x 63,5 | 3397 | CH HA-25-250 | 3.00 76,2 | .75 19,1 | .50 12,7 | | | | | | |

Standard color Natural. *Standard color Gray.

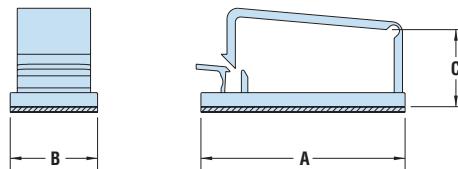


HEYClip™ Hinged Edge Cable Holders

Designed for Rectangular Edge Slot or Through-Hole Mounting -
suitable for retrofit applications

| WIRE CAPACITY | PANEL DIMENSIONS | | | | | | Thickness | PART NO. Natural | DESCRIPTION | PART DIMENSIONS | | |
|---------------|------------------------|----------------|----------------|----------------|-----------|-----------|-----------|---------------------|-------------------------|-----------------|----------------|-------------|
| | Thru Hole or Edge Slot | | | W in. mm. | in. mm. | in. mm. | | | | A in. mm. | B in. mm. | |
| in. mm. | X in. mm. | Y in. mm. | Z in. mm. | | | | | | | | | |
| .77 x .20 | 19.5 x 5.2 | .858 | 21.8 | .421 | 10.7 | .161 | 4,1 | .98 25,0 | .031 - 0.8 - .063 1,6 | 3300 | CH HE-25 | 1.19 30,2 |
| | | | | | | | | 1.02 26,0 | .079 2,0 | | | |
| .77 x .47 | 19.5 x 12.0 | .870 | 22.0 | .710 | 18.0 | .200 | 5,0 | .98 25,0 | .020 - 0.5 - .063 1,6 | 3301 | CH HE-22 | 1.22 31,0 |
| | | | | | | | | | | | | |

Standard color natural.

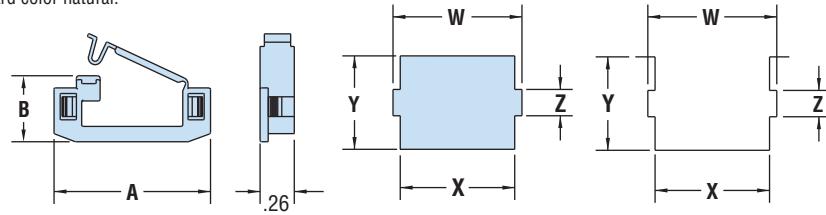

CH HE Series

*Quick
Specs*

Material
Flammability Rating
Temperature Range

Nylon 6/6
94V-2
32°F (0°C) to 185°F (85°C)