

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

REVISIONS


© COPYRIGHT - By -

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	PER ECR-16-005636	10MAY2016	GSK	AP

Notes:

1. Assembly per assembly instruction 114-32111.
2. Electrical test:  
100% open short & miss wire test  
contact resistance: 2 Ohm max
- 3 Stripped and tinned. Maximum conductor diameter after tinning 2.10mm.
- 4 Nut does not need to be completely screwed.

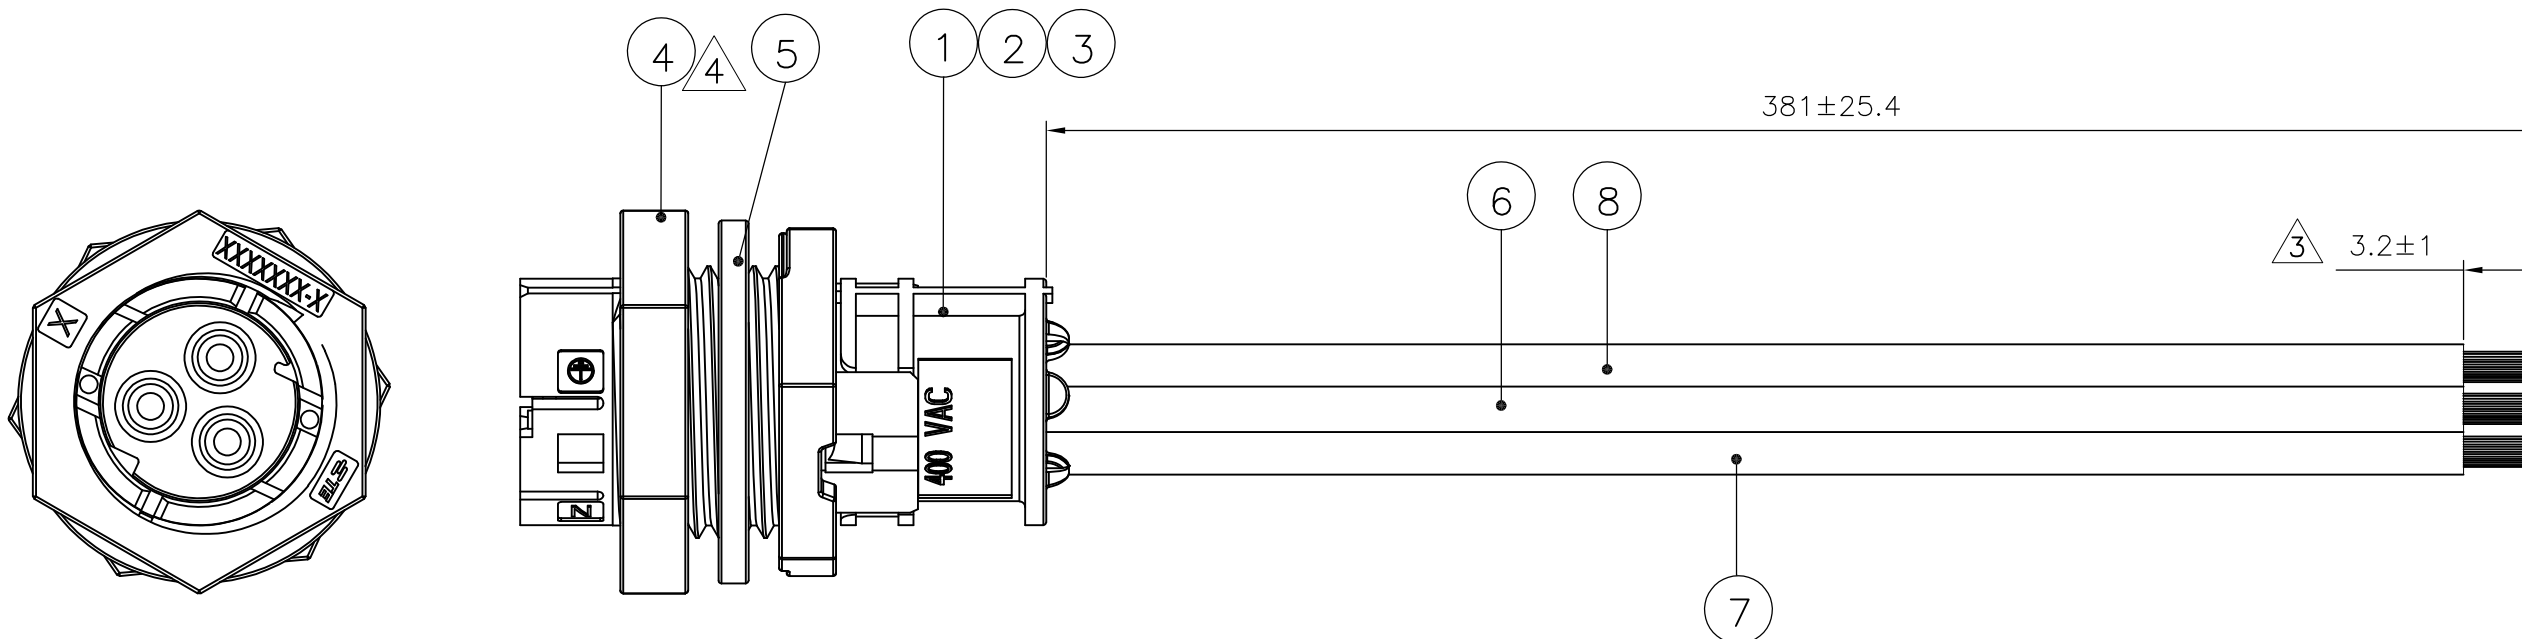

2829473-1  
TE P/N

WIRING SCHEME	
CONNECTOR HOUSING (ITEM 1)	WIRE
PE/⊥	GREEN
N	WHITE
L	BLACK

0.41	M	WIRE, ELEC, 18 AWG, UL STYLE 1316/1452 (GREEN)	8
0.41	M	WIRE, ELEC, 18 AWG, UL STYLE 1316/1452 (WHITE)	7
0.41	M	WIRE, ELEC, 18 AWG, UL STYLE 1316/1452 (BLACK)	6
1	PC	PANEL SEAL NECTOR M-LINE	5
1	PC	3P SCREW NUT, PNL MNT	4
1	PC	LOCKING FOR CONTACTS M-LINE	3
3	PC	SOCKET, CRIMP, 16-18 AWG	2
1	PC	3P SOCKET HSG, PNL MNT, CODE A	1
QTY	UoM	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.BURZYŃSKI 25MAY2015	TE Connectivity														
DIMENSIONS: mm		CHK A.V.ZANDVOORT 25MAY2015															
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.V.ZANDVOORT 25MAY2015	NAME PIGTAIL BULKHEAD SOCKET STD UL CABLE														
<table border="0"> <tr> <td>0 PLC</td> <td>± 0,5</td> </tr> <tr> <td>1 PLC</td> <td>± 0,5</td> </tr> <tr> <td>2 PLC</td> <td>± 0,5</td> </tr> <tr> <td>3 PLC</td> <td>± -</td> </tr> <tr> <td>4 PLC</td> <td>± -</td> </tr> <tr> <td>ANGLES</td> <td>± 2°</td> </tr> </table>		0 PLC	± 0,5	1 PLC	± 0,5	2 PLC	± 0,5	3 PLC	± -	4 PLC	± -	ANGLES	± 2°	PRODUCT SPEC -	SIZE A3		
0 PLC	± 0,5																
1 PLC	± 0,5																
2 PLC	± 0,5																
3 PLC	± -																
4 PLC	± -																
ANGLES	± 2°																
MATERIAL -		FINISH -	APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C-2829473												
CUSTOMER DRAWING			WEIGHT	RESTRICTED TO -	SCALE NTS												
			SHEET 1 OF 1		REV C												