
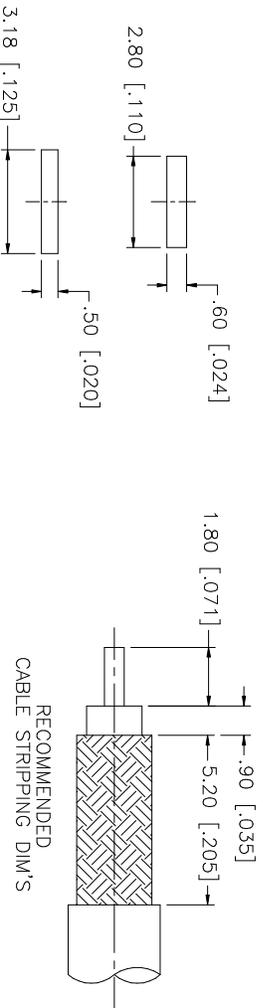


REV.	DATE	DESCRIPTION
NC	05/12/03	INITIAL RELEASE

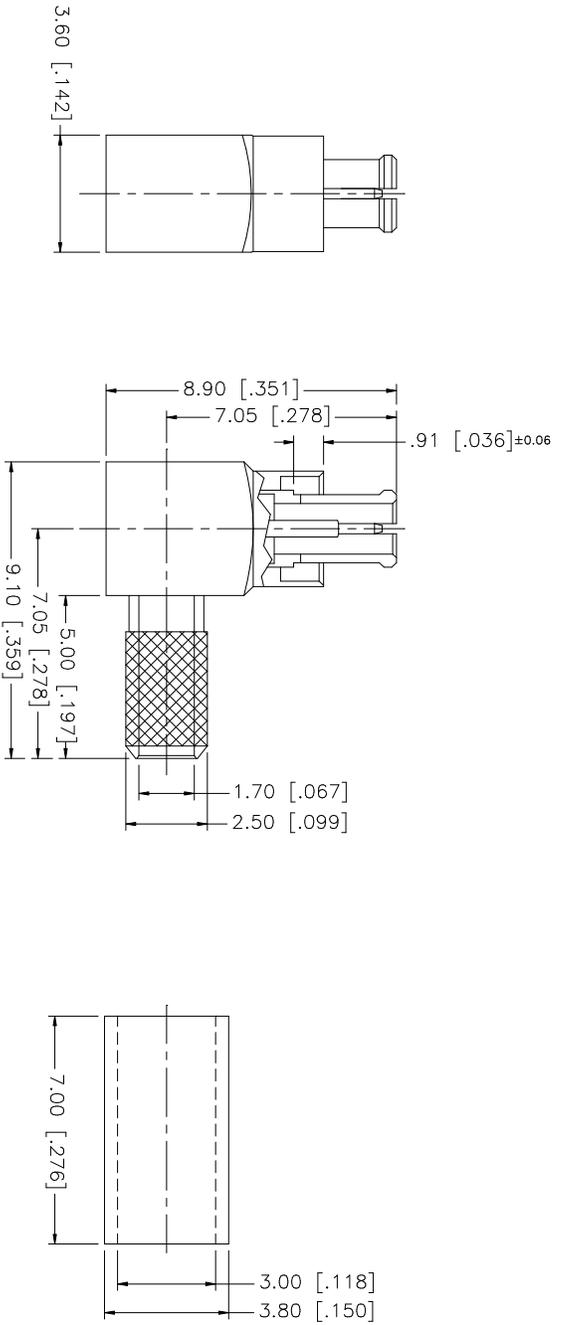

NOTE:  
 1. CRIMPED FERRULE  
 HEX CRIMP SIZE .128"  
 2. CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	INSULATOR
1	NICKEL	TEFLON	CONTACT PIN
1	NICKEL	BRASS	BODY

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	INSULATOR
1	NICKEL	TEFLON	CONTACT PIN
1	NICKEL	BRASS	BODY

APPROVALS	DATE
G.R.S.	05/12/03

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"

CAD FILE	DWG. NO.	REV.	NC	SIZE	SCALE
C:/253/253100.DWG	253100.DWG	NC		A	NA

APPROVALS	DATE
G.R.S.	05/12/03

PART DESCRIPTION	PART NO.
MC-CARD R/A PLUG (FOR RG-174/U, 179/U, 187A/U, 188A/U, 316/U CABLE)	253100

APPROVALS	DATE
G.R.S.	05/12/03

CAD FILE	DWG. NO.	REV.	NC	SIZE	SCALE
C:/253/253100.DWG	253100.DWG	NC		A	NA

**Amphenol Connex**

MC-CARD R/A PLUG (FOR RG-174/U,  
179/U, 187A/U, 188A/U, 316/U CABLE)

253100