
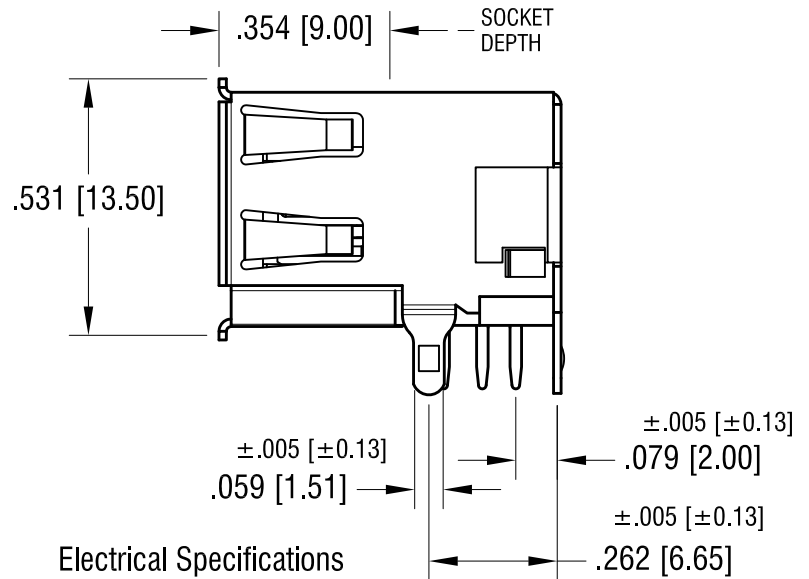
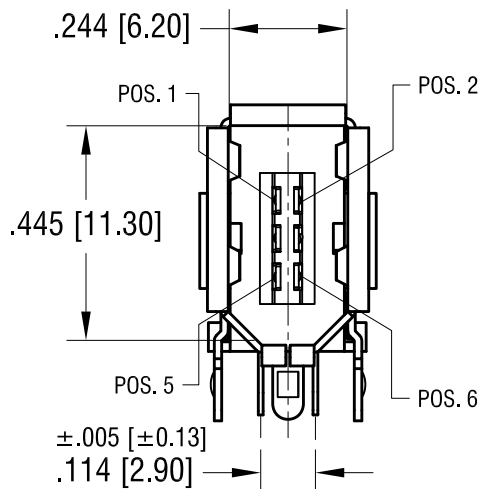
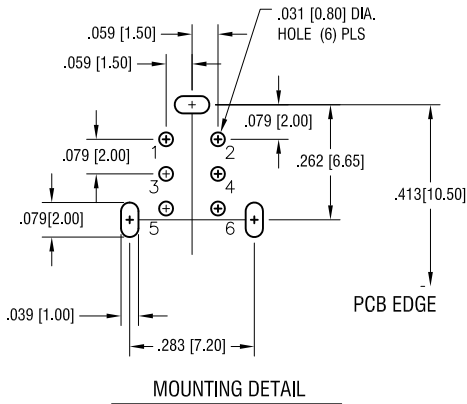
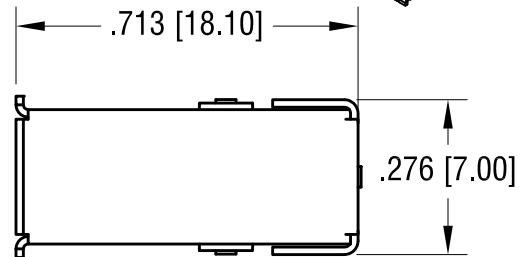


THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE



Notes:

Shell: Mat'l: Phosphor Bronze,
Finish: Tin Plate over Nickel Plate.
Insulator: Mat'l: Thermoplastic UL 94V-0
Contacts: Mat'l: Phosphor Bronze
Finish: Gold Plate over Nickel Plate on
Contact Area. Tin Plate over
Nickel Plate on Solder Tail.

Electrical Specifications
Rated Voltage: 30V AC (rms)
Contact Current Rating: 1A Max.
Contact Resistance: 30 milliohms Max.
Insulation Resistance: 1000 Megohms Min.
Dielectric Withstanding: 750V AC
Operating Temperature: 32° [0°C] to 104° [40°C]

6.7.05 CHANGE AS PER ECN 05-031

A

DATE

DESCRIPTION

REV.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

IEEE 1394 THRU-HOLE UP-RIGHT SOCKET

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

BOONE

DATE

7.1.99

APP'D

LN

SCALE

2.5X

TOLERANCES

INCH [MM]

DECIMAL ±.010 [±0.25]

ANGULAR ± 1°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

930