

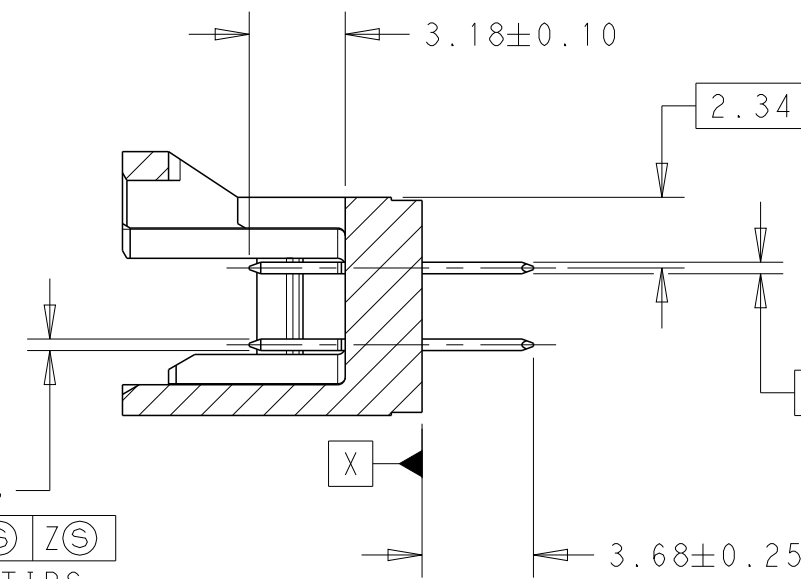
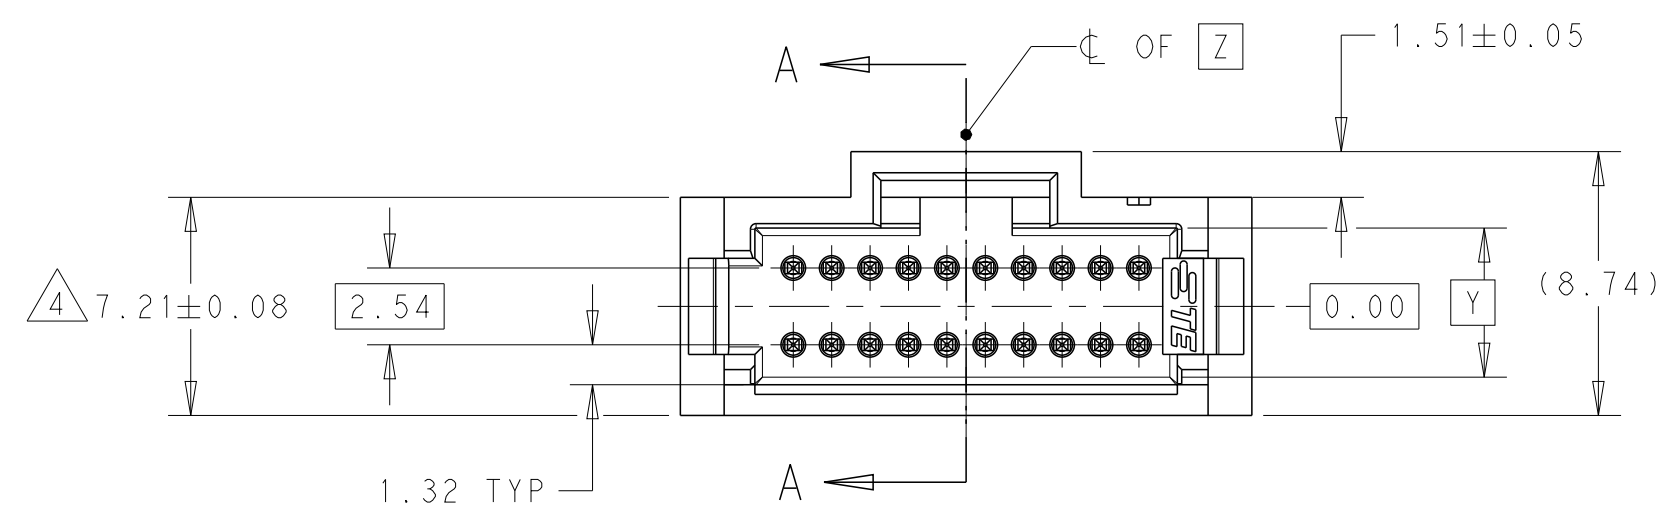



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AC	REDRAWN/REVISED PER ECO-17-001755	22NOV2017	GR	JO

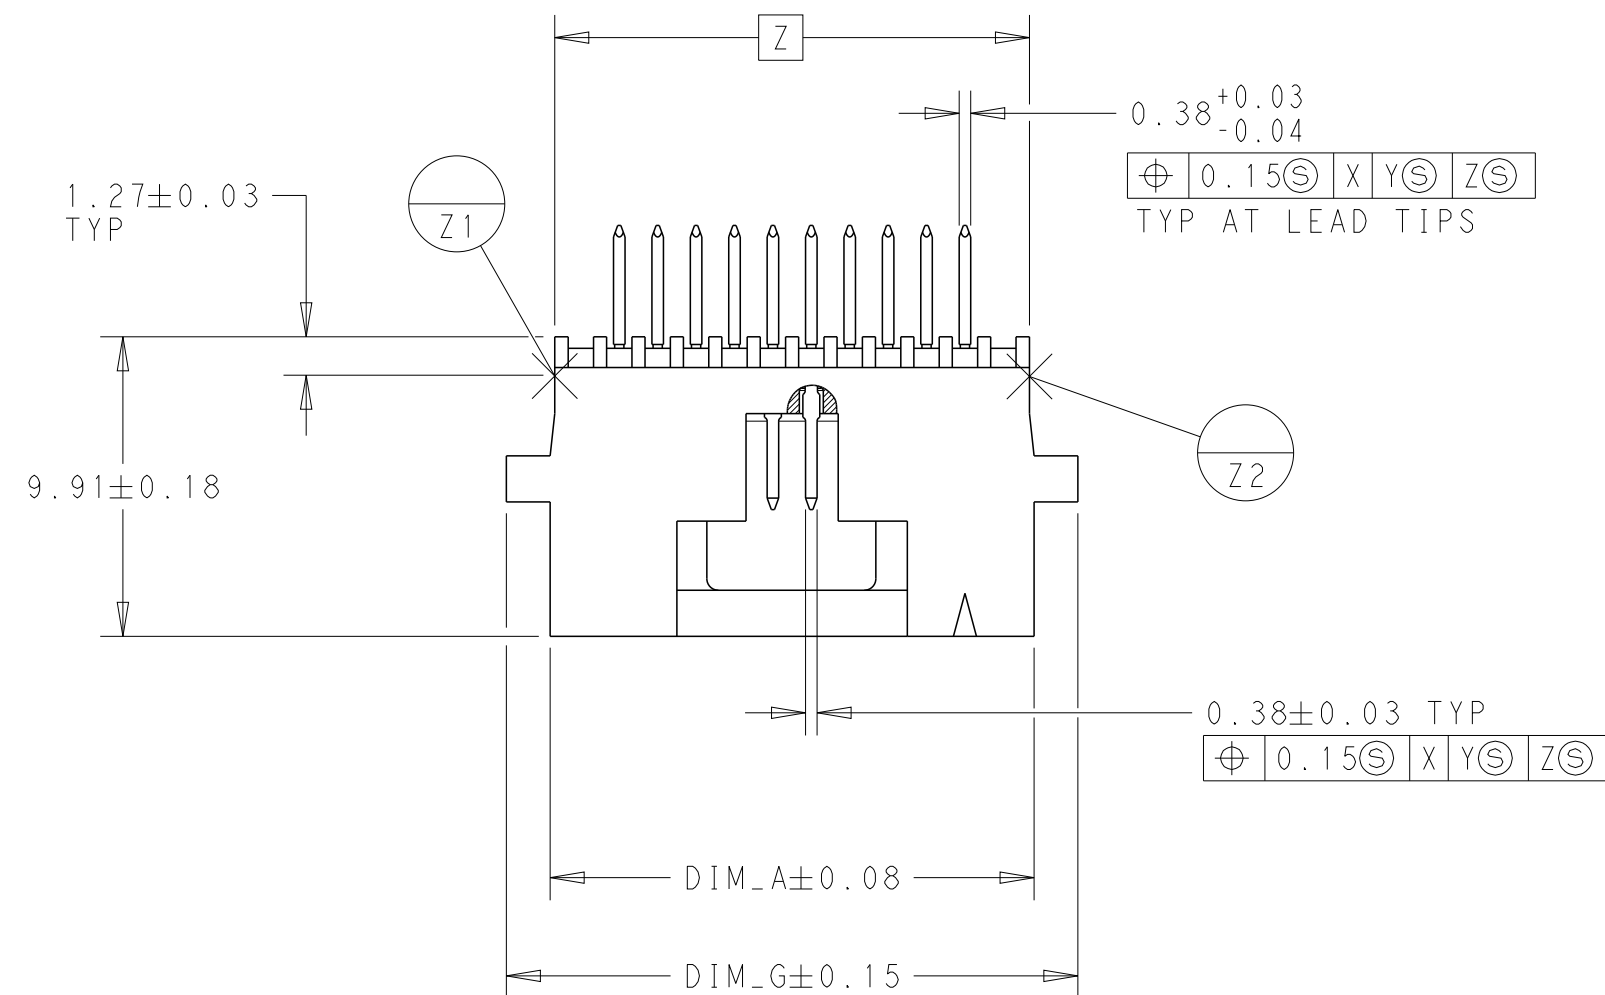


SECTION A - A

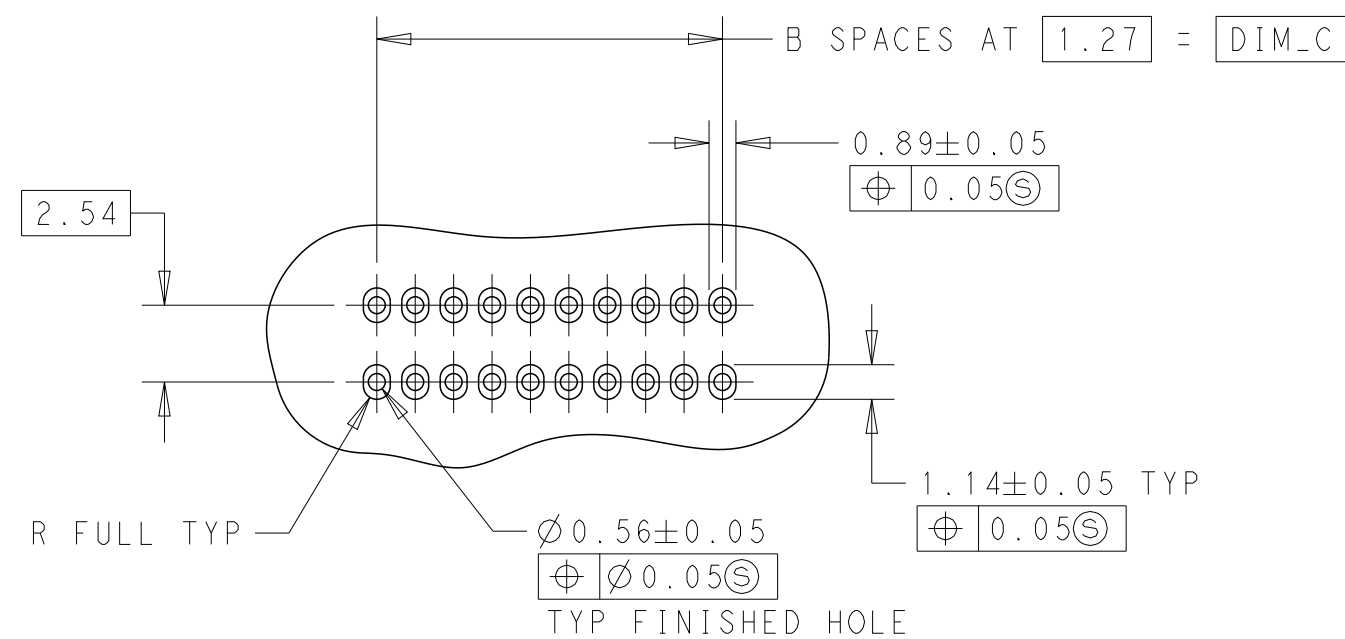


RECOMMENDED BOARD LAYOUT

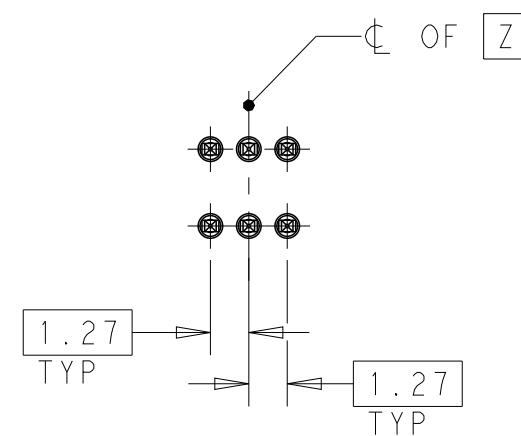

BASIC DIMENSION FOR
EVEN NUMBER OF SPACES
(SEE TABLE)

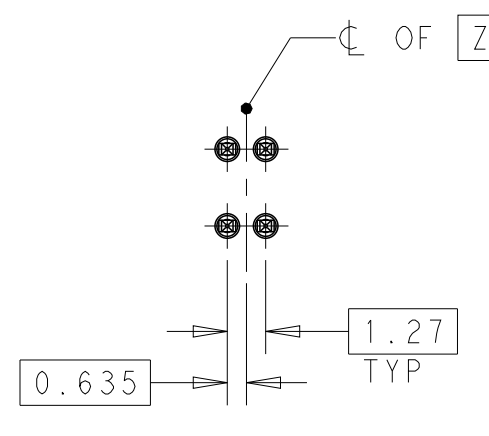

BASIC DIMENSION FOR
ODD NUMBER OF SPACES
(SEE TABLE)

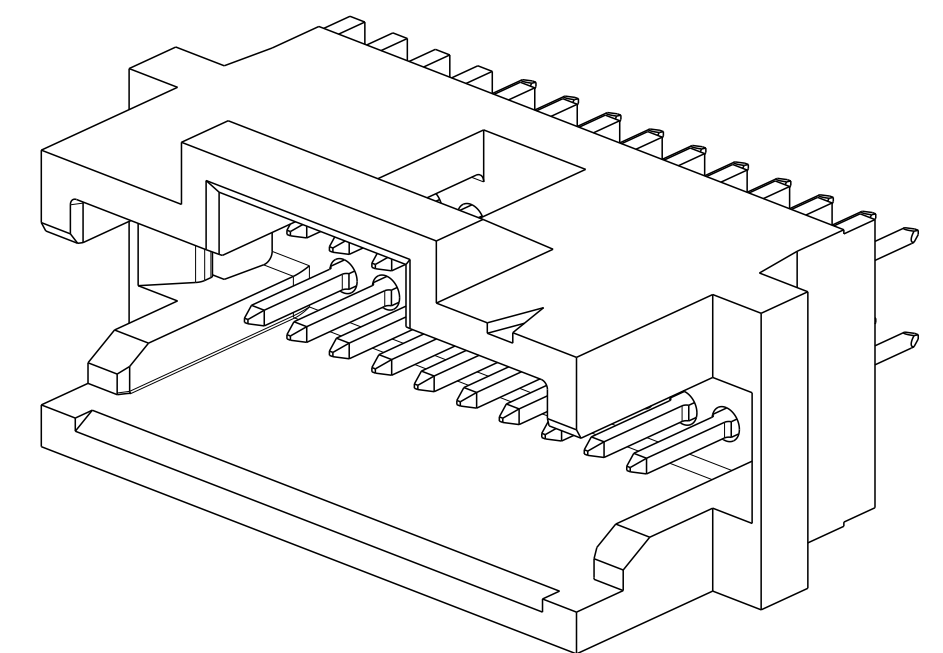

SCALE 6 : 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22NOV2017 G. RAMESH CHK 22NOV2017 J. OLSON APVD 22NOV2017 J. OLSON		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±0.5° FINISH -		NAME HEADER ASSEMBLY, VERTICAL, DOUBLE ROW, W/SIDE & END LATCHES, AMPMODU System 50 -	
MATERIAL 		PRODUCT SPEC 108-1093 APPLICATION SPEC 114-25031 WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
SEE TABLE		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 2 REV AC	
		A200779		C-104666	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

11

27.79	20.32	15	24.89	34	8-104666-3
12.55	5.08	4	9.65	10	8-104666-2
22.71	15.24	12	19.81	26	8-104666-1
21.44	13.97	11	18.54	24	8-104666-0
16.36	8.89	7	13.46	16	7-104666-9
49.38	46.99	33	46.48	68	7-104666-8
44.30	36.83	29	41.40	60	7-104666-7
69.70	62.23	49	66.80	100	7-104666-6
57.00	49.53	39	54.10	80	7-104666-5
37.95	30.48	24	35.05	50	7-104666-4
31.60	24.13	19	28.70	40	7-104666-3
25.25	17.78	14	22.35	30	7-104666-2
18.90	11.43	9	16.00	20	7-104666-1

7

27.79	20.32	15	24.89	34	6-104666-3
12.55	5.08	4	9.65	10	6-104666-2
22.71	15.24	12	19.81	26	6-104666-1
21.44	13.97	11	18.54	24	6-104666-0
16.36	8.89	7	13.46	16	5-104666-9
49.38	46.99	33	46.48	68	5-104666-8
44.30	36.83	29	41.40	60	5-104666-7
69.70	62.23	49	66.80	100	5-104666-6
57.00	49.53	39	54.10	80	5-104666-5
37.95	30.48	24	35.05	50	5-104666-4
31.60	24.13	19	28.70	40	5-104666-3
25.25	17.78	14	22.35	30	5-104666-2
18.90	11.43	9	16.00	20	5-104666-1

FINISH

DIM_G

DIM_C

B SPACES

DIM_A

NO OF POSN

PART NUMBER

10

27.79	20.32	15	24.89	34	3-104666-3
12.55	5.08	4	9.65	10	3-104666-2
22.71	15.24	12	19.81	26	3-104666-1
21.44	13.97	11	18.54	24	3-104666-0
16.36	8.89	7	13.46	16	2-104666-9
49.38	46.99	33	46.48	68	2-104666-8
44.30	36.83	29	41.40	60	2-104666-7
69.70	62.23	49	66.80	100	2-104666-6
57.00	49.53	39	54.10	80	2-104666-5
37.95	30.48	24	35.05	50	2-104666-4
31.60	24.13	19	28.70	40	2-104666-3
25.25	17.78	14	22.35	30	2-104666-2
18.90	11.43	9	16.00	20	2-104666-1

1

27.79	20.32	15	24.89	34	1-104666-3
12.55	5.08	4	9.65	10	1-104666-2
22.71	15.24	12	19.81	26	1-104666-1
21.44	13.97	11	18.54	24	1-104666-0
16.36	8.89	7	13.46	16	104666-9
49.38	46.99	33	46.48	68	104666-8
44.30	36.83	29	41.40	60	104666-7
69.70	62.23	49	66.80	100	104666-6
57.00	49.53	39	54.10	80	104666-5
37.95	30.48	24	35.05	50	104666-4
31.60	24.13	19	28.70	40	104666-3
25.25	17.78	14	22.35	30	104666-2
18.90	11.43	9	16.00	20	104666-1

FINISH

DIM_G

DIM_C

B SPACES

DIM_A

NO OF POSN

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC±0.3

1 PLC±0.13

2 PLC±0.13

3 PLC±0.13

4 PLC±0.13

ANGLES±0.5°

FINISH-

SEE TABLE

MATERIAL

DWN22NOV2017

G. RAMESH

CHK22NOV2017

J. OLSON

APVD22NOV2017

J. OLSON

PRODUCT SPEC

108-1093

APPLICATION SPEC

114-25031

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

NAME

HEADER ASSEMBLY, VERTICAL, DOUBLE ROW, W/SIDE & END LATCHES, AMPMODU System 50

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

4:1

SHEET

2

OF

2

REV

AC

1471-9 (3/13)