



# PCB terminal block - PT 2,5-5,0-H SAMPLE-SET - 1988778

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, pitch: 5 mm, number of positions: 1, connection method: Screw connection with wire protector, mounting: Wave soldering, color: green

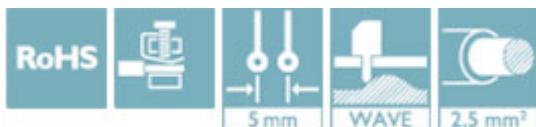

## Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 036788
GTIN	4046356036788

## Technical data

### Dimensions

Pitch	5 mm
-------	------

### General

Range of articles	SET
Nominal cross section	2.5 mm <sup>2</sup>
Number of positions	1

### Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Approvals

### Approvals

### Approvals

EAC / cULus Recognized


# PCB terminal block - PT 2,5-5,0-H SAMPLE-SET - 1988778


## Approvals

Ex Approvals

---

### Approval details

EAC		B.01742
-----	---	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-20030211
	D	B	
Nominal voltage UN	300 V	300 V	
Nominal current IN	10 A	20 A	
mm <sup>2</sup> /AWG/kcmil	20-12	20-12	

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>