


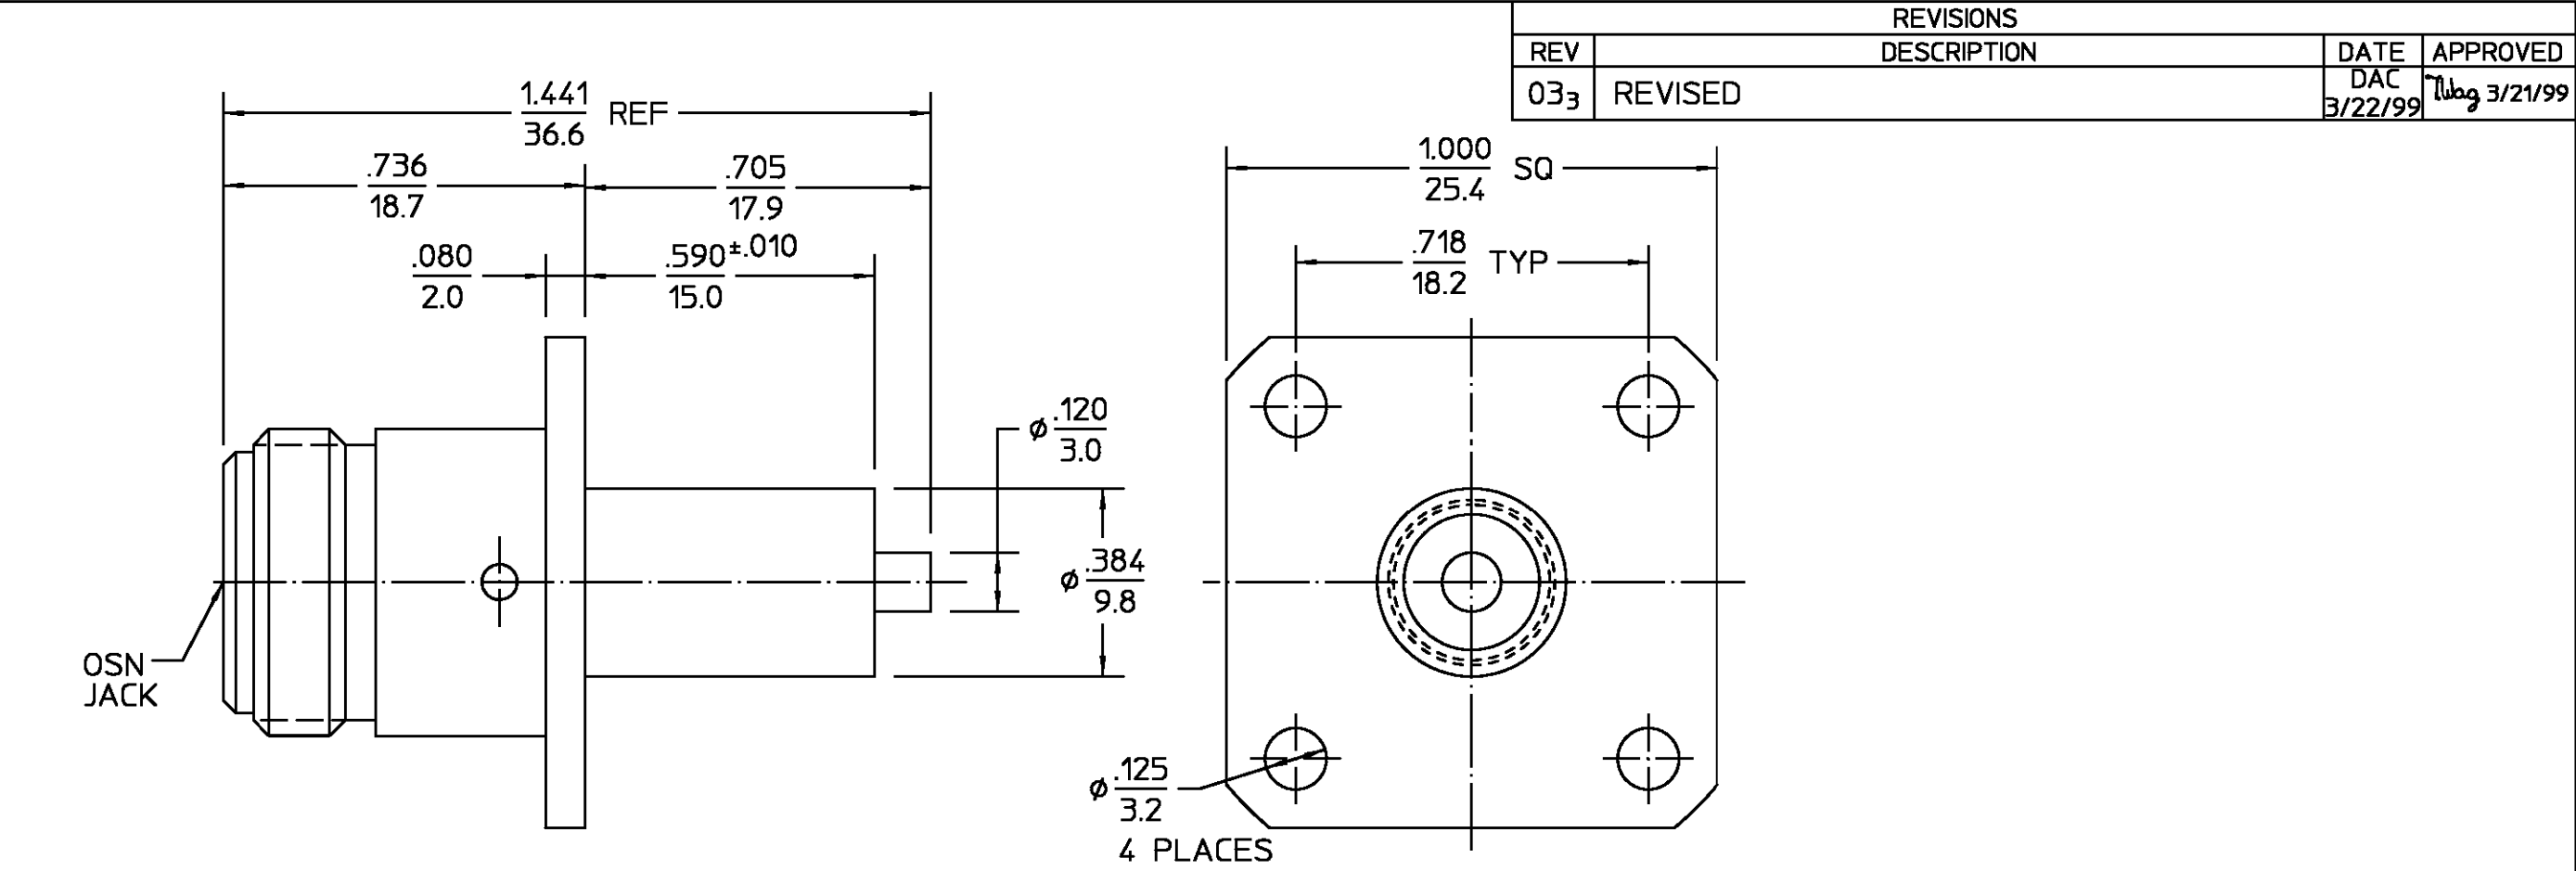

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A380
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 304.2	Temperature Rating -65°C to +165°C	DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
Frequency Range (GHz) DC to 11	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition B.	CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
Volt Rating (VRMS MAX)	Torque 12 - 15 in-lbs	Shock MIL-STD-202, Method 213, Condition I.	COMPONENT	MATERIAL	FINISH
⊗ Sea Level 250	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 85°C	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY E.S.C. 12-4-70	 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
VSWR 1.10 + .01 f(GHz)	Insertion (MAX Lbs) 2.0	Moisture Resistance MIL-STD-202, Method 106	TOLERANCE ON	CHECKED BY P.R.B. 12-7-70	
Insertion Loss (dB MAX) .07 √f(GHz)	Withdrawal (MIN Oz) 2.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	FRAC. DEC. ANGLES	APPROVED BY B.C. 12-7-70	
RF Leakage (dB MIN) -[60- f(GHz)]	Force to Engage and Disengage (In-Lbs MAX) 6.0	.XXX = in XX.X = mm	These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSN 4 HOLE FLANGE MOUNT JACK RECEPTACLE
Corona, 70,000 Ft (VRMS MIN) 500	Center Contact Captivation				SIZE B
Dielectric Withstanding Voltage (VRMS MIN) ⊗ Sea Level 2,500	Axial (Lbs) 6.0				CODE IDENT NO. 26805
Contact Resistance (Milliohms MAX)	Radial (In-Oz) 4.0				3052-1201-02
Center Contact 4.0	Cable Retention				REV 03 ₃
Outer Contact 0.2	Axial Force (Lbs) N/A				SCALE 3 : 1
Cable to Housing N/A	Torque (In-Oz) N/A				SHEET 1 OF 1
RF High Potential ⊗ Sea Level (VRMS MIN ⊗ 5 MHz) 1,500	Weight (Grams) TBD				
I.R.(Megohms MIN) 5,000					