DRAWN	CHECKED	CHECK	REVISIONS	ISSUE	DRAWING NUMBER	
	A.J. 9. 12. 64.		2 Added	4	M	DTE7 -2RN SERIES CHART 1

RELEASE No 1916-069 REPLACES

Honeywell MICRO

SWITCH - ENCLOSED

DTE7 -2RN SERIES CHART 1.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	16-49 OZ.
RELEASE FORCE	10 OZ. MIN.
DIFFERENTIAL TRAVEL	.070 MAX.
OVERTRAVEL	.125 MIN.
SWITCH BASIC REPLACEMENT	DT-2RQ-A7M4

ELECTRICAL DATA	
	D.P.D.T.
	.020 MIN.
	0A-125 OR 250 VAC
	0.3A-125 VDC ; 0.15 A-250 VDC

SCALE 1:1

DO NOT SCALE ON NOT UNLESS OTHERWISE SEE FILE

MENSIONS ARE IN INCHES

TOLERANCES ARE

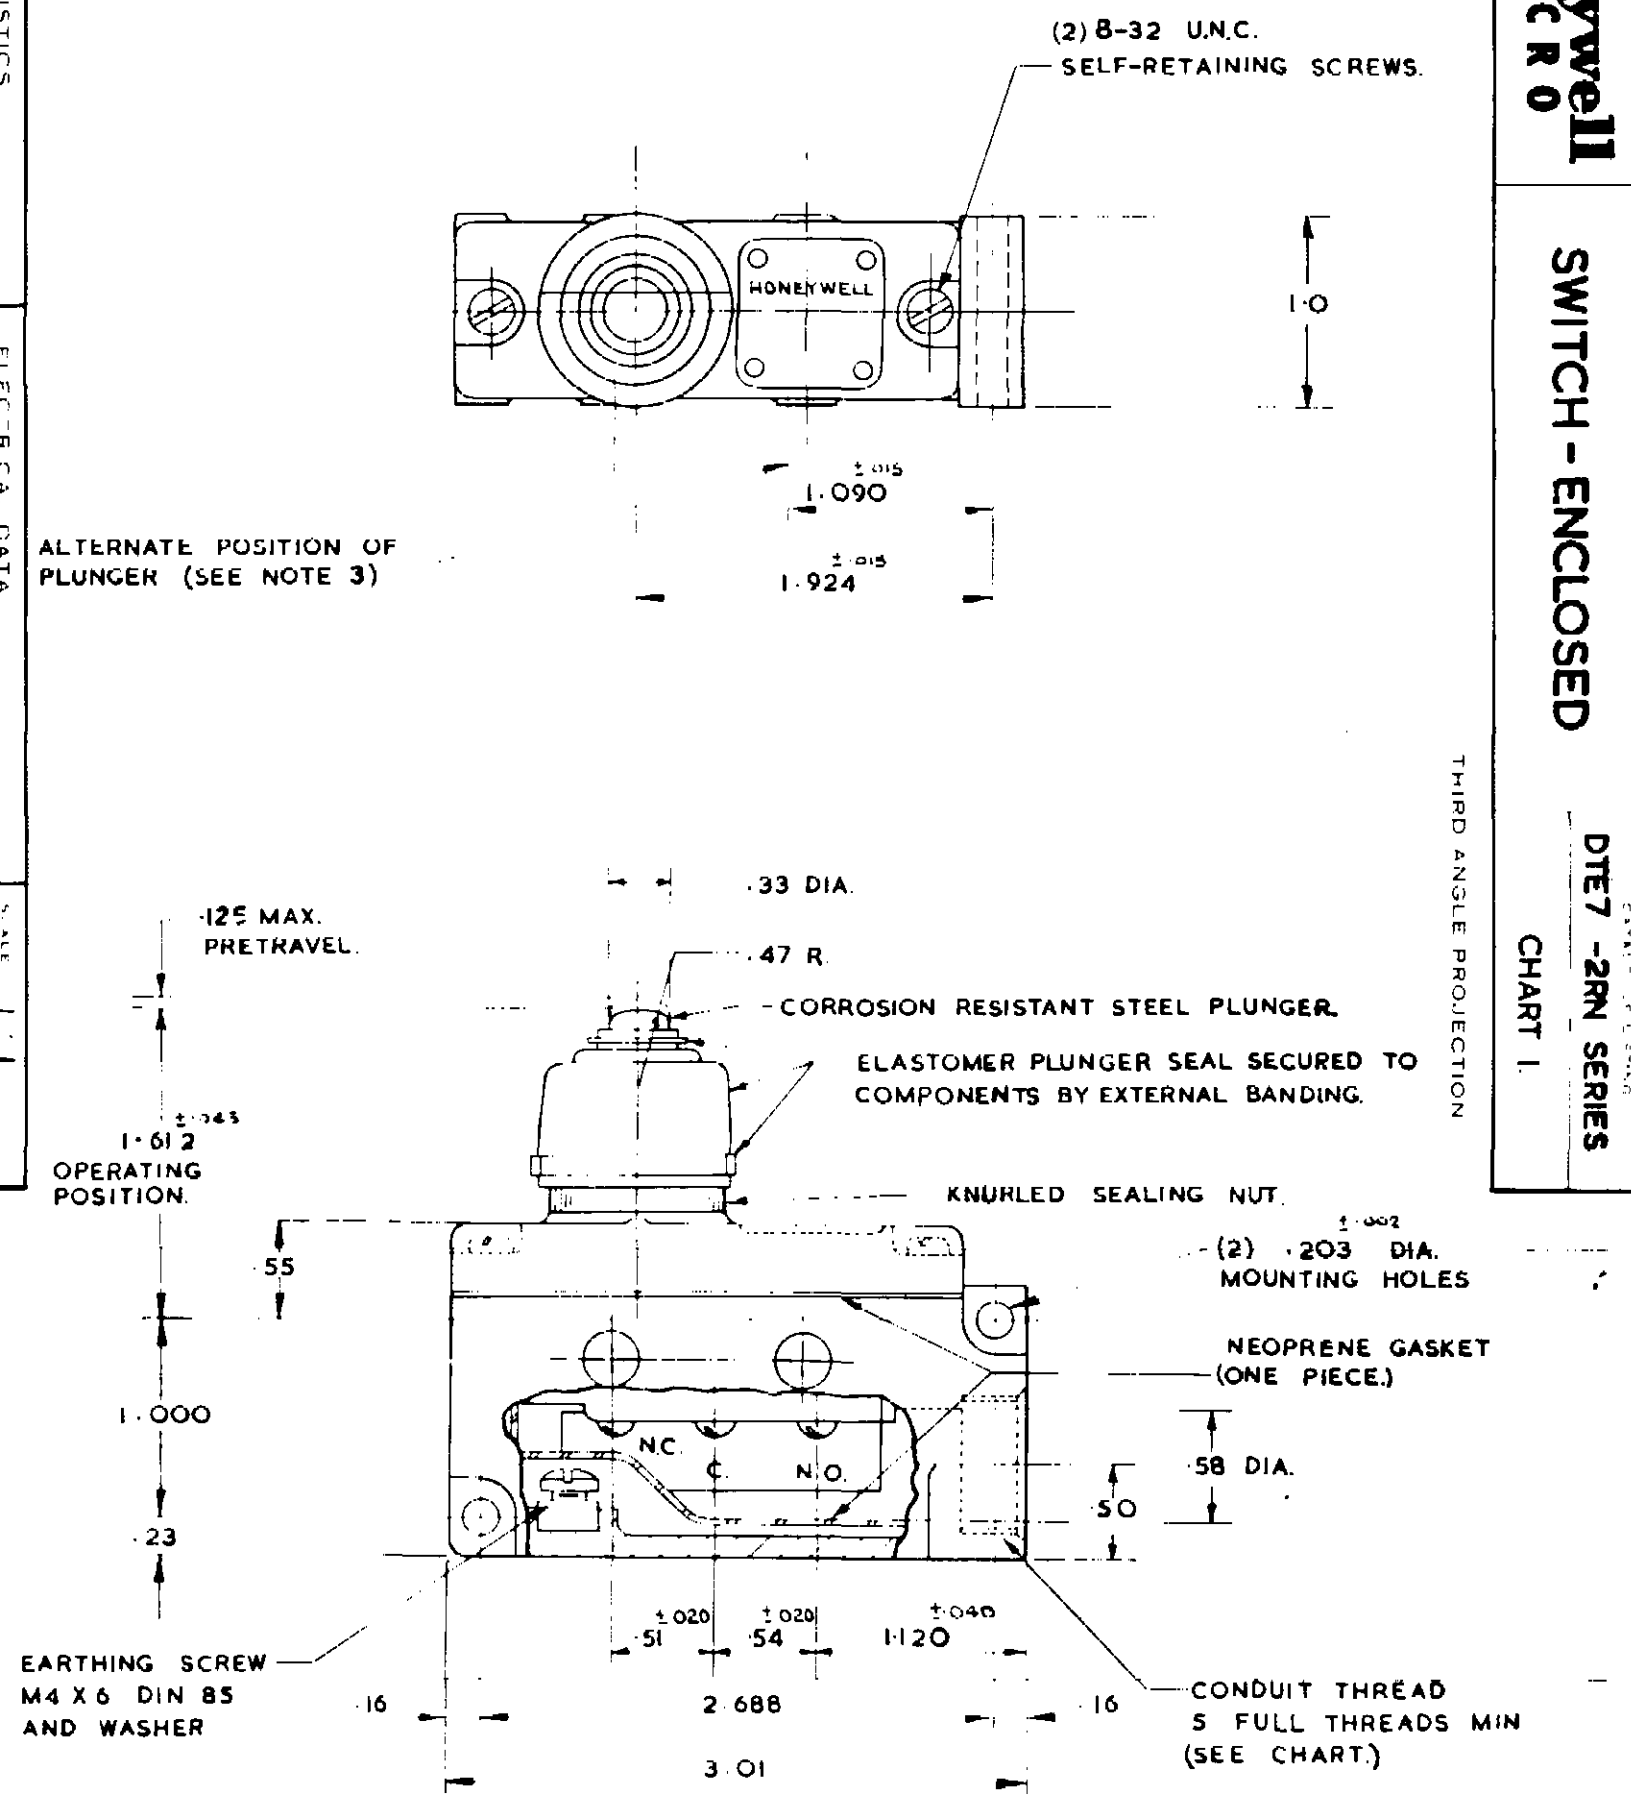

NOTE.

1 – ALUMINIUM ENCLOSURE FINISHED WITH GRAY PAINT.
2 – 4-40 N C X·125 REF TERMINAL SCREWS AND WASHERS.
3 – COVER, PLUNGER AND BASIC SWITCH MAY BE REMOVED AS A UNIT AND MOUNTED OPPOSITE HAND TO THAT SHOWN

CATALOGUE LISTING.	Issue No.	CONDUIT THREAD	REMARKS.
DTE7-2RN34-C	1	20mm TO BS4568	SILICONE RUBBER PLUNGER SEAL
DTE7 — 2RN — C	1	20 MM. TO BS. 4568	
DTE7 — 2RN — P.G.	1	PG 13, 5.	
DTE7-2RN -PG11	1	P.G. 11	

HONEYWELL CONTROLS LTD., GREENFORD, MIDDLESEX & NEWHOUSE, LANARKSHIRE