

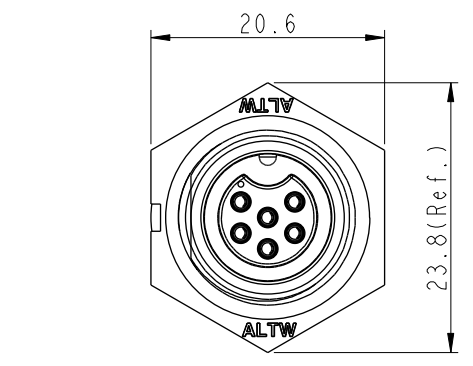
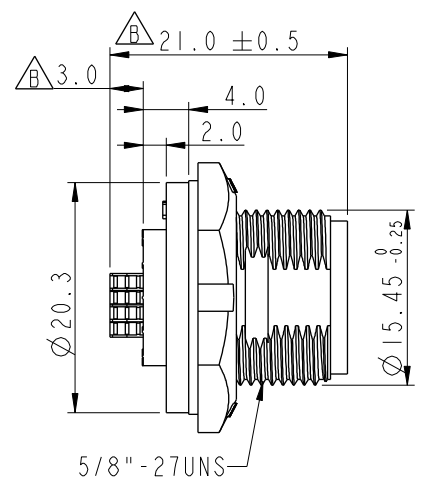




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1680775~79	2016/08/17	Jinhai	Change Dimensions
C	C190346	2019/03/05	Vicky	Change Note

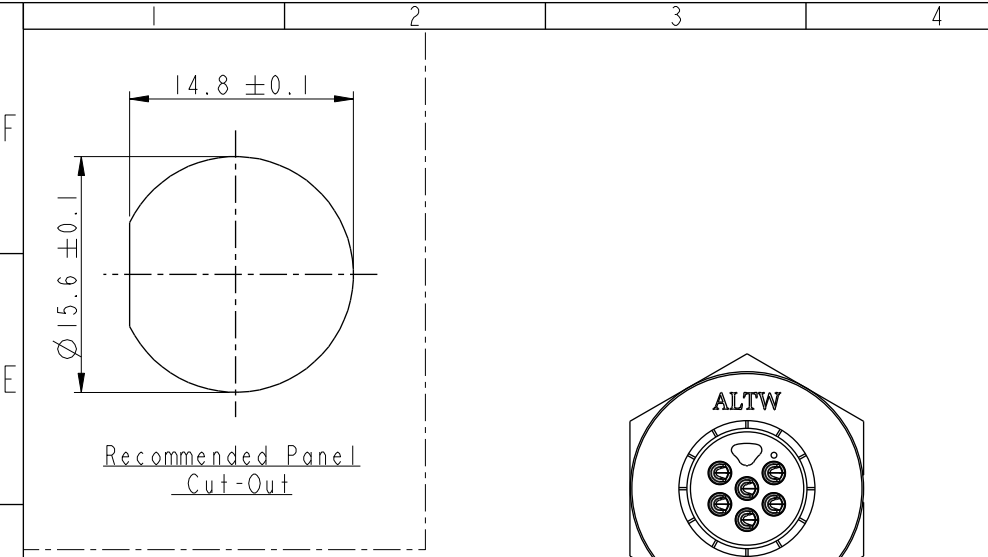

ABD-XXPMFS-SC7001
02:2Pin
06:6Pin

With Liquid Glue

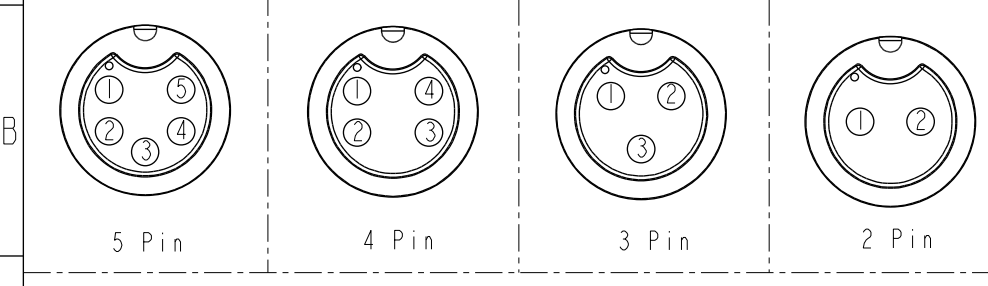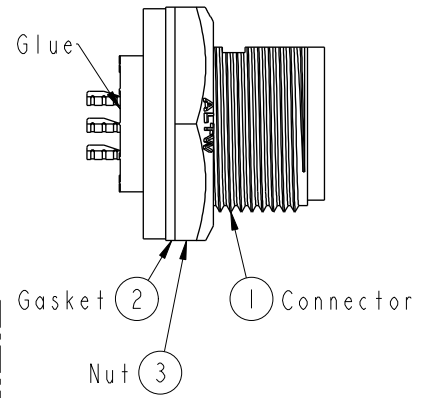

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated.
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Gasket: Rubber, Gray.
 - * Nut: Thermoplastic, Black.
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness:3.3mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness:4.5mm
 - * Gasket and Nut are packed separately
in PE bags.(Gasket/Nut不組裝，散裝出貨)

UNIT:mm		TOLERANCE		TITLE	
.X ±0.25		.XX ±0.1		STANDARD	
.XXX ±0.05		ANGLES ±1°		PANEL SCREW M CONN F PIN	
SCALE 2:1		SIZE A4		SHEET 1 OF 1	
REV. C		WC-REV. A.2		QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Vicky	2019-03-05
ABD-XXPMFS-SC7001	Checked By Rita	DATE 2019-03-05
CUSTOMER	APPROVED BY Max	DATE 2019-03-05
ALTW		