




- NOTE:
- 1

HOUSING: GLASS FILLED THERMOPLASTIC
CONTACTS: COPPER ALLOY
- 2

PLATING:
CONTACT AREA: PERFORMANCE LEVEL 2 ACC. TO DIN 41612
SOLDERING AREA: TIN OVER NICKEL
- 3

CONTACT ARRANGEMENTS:
AN ASTERISK "X" DENOTES A SIGNAL CONTACT.
AN ASTERISK "⊗" DENOTES KINKED A SIGNAL CONTACT.
- 4

KINKED POSTS
5. SOLDER POSTS SUITABLE FOR 1,0 NOM. P.C.B. HOLES
6. CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE

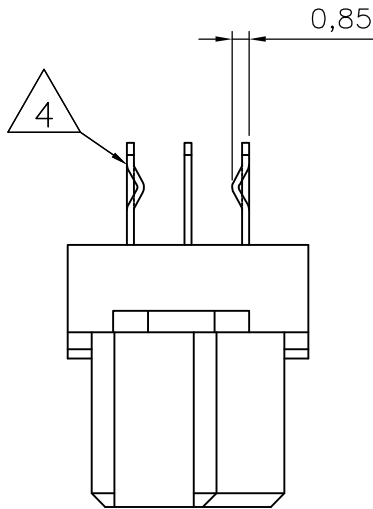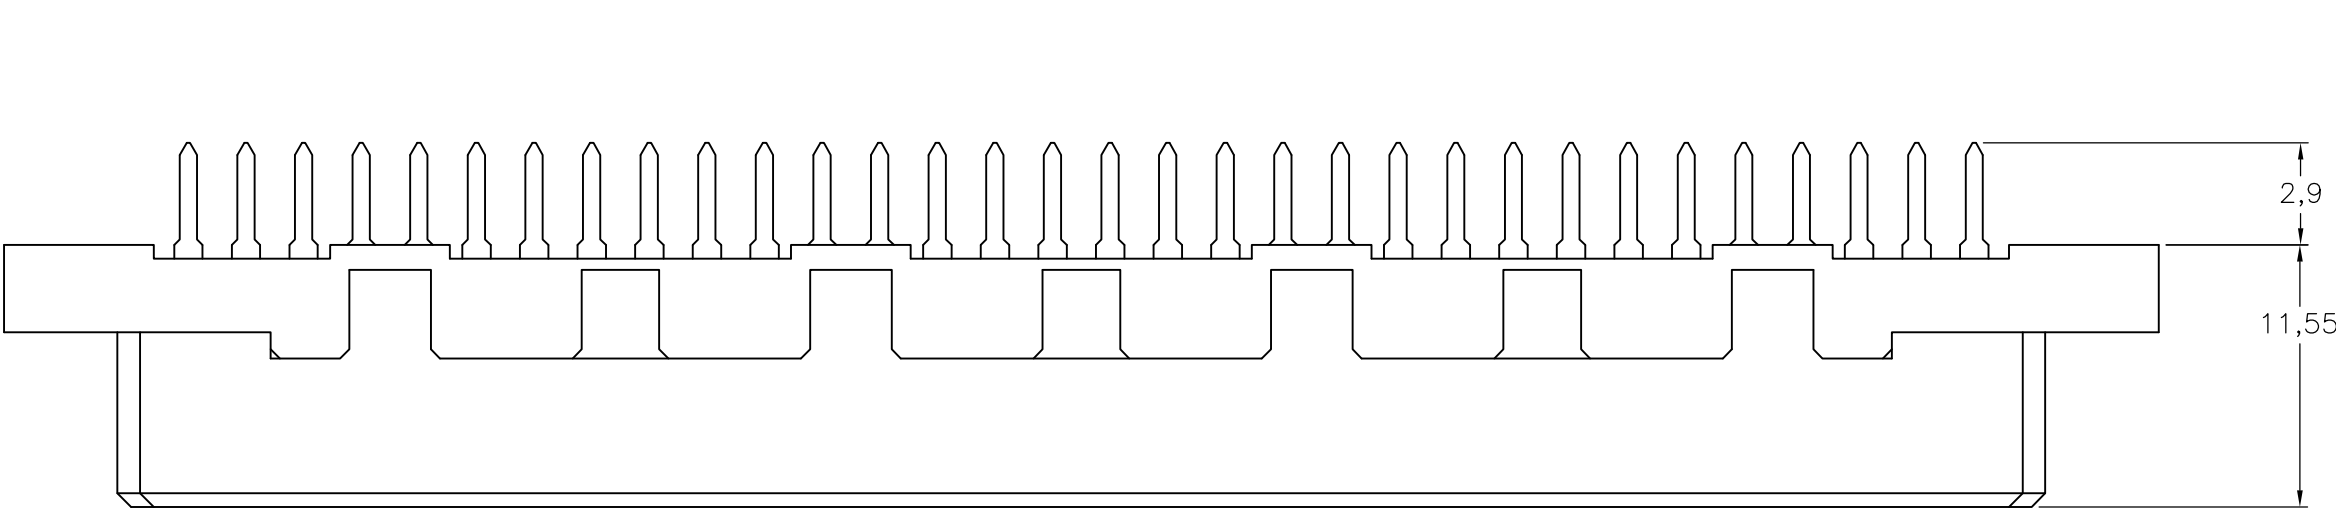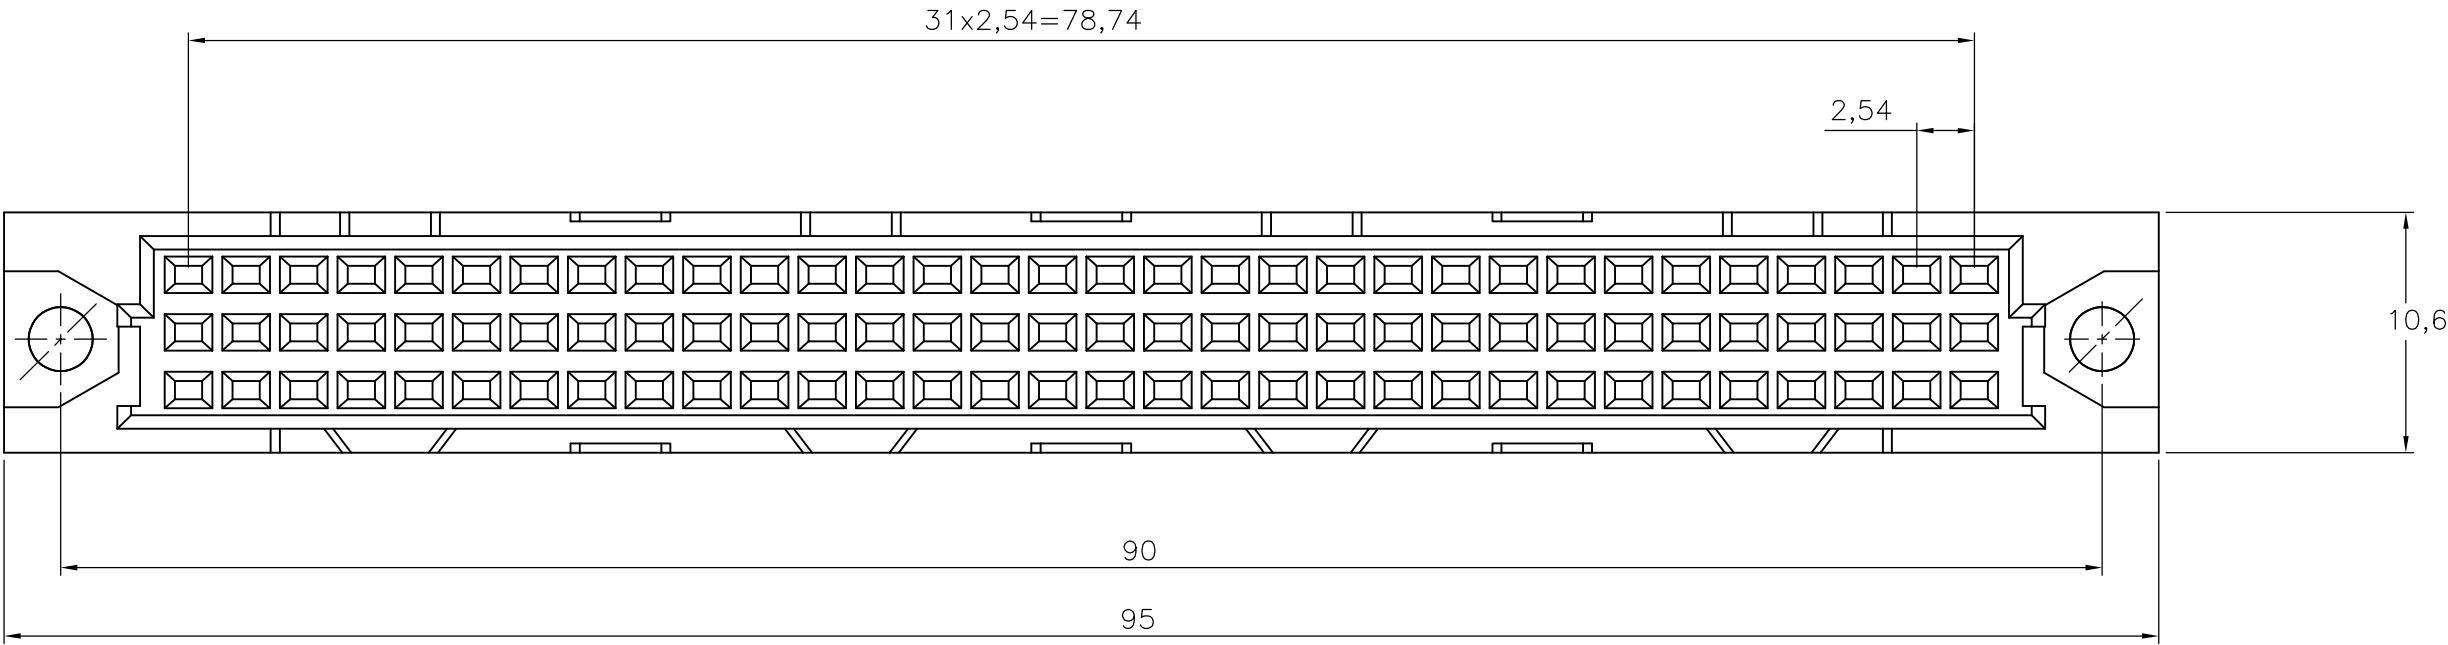

ROW	POS		3
	a	b	
	c		
	⊗	X	1
	X		2
	X		3
	X		4
	X		5
	X		6
	X		7
	X		8
	X		9
	X		10
	X		11
	X		12
	X		13
	X		14
	X		15
	X		16
	X		17
	X		18
	X		19
	X		20
	X		21
	X		22
	X		23
	X		24
	X		25
	X		26
	X		27
	X		28
	X		29
	X		30
	X		31
	⊗	X	32

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL: -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH: -

DWN: RAVINDRA K, 15MAR11

CHK: MARCIN KOMAR, 07APR11

APVD: STEFFAN HABERSTROH, 07APR11

PRODUCT SPEC: -

APPLICATION SPEC: -

WEIGHT: -

CUSTOMER DRAWING

WITH: 4

FINISH: 2

MATERIAL: 1

2173044-4

TE PARTNUMBER

TE Connectivity

96P.IEC-C FEM.CONN.
ACC. DIN 41612 WITH SOLDER POSTS
1,6mm P.C.BOARD THICKNESS

SIZE: A2

CAGE CODE: 00779

DRAWING NO: C=2173044

RESTRICTED TO: -

SCALE: NTS

SHEET: 1 of 1

REV: A