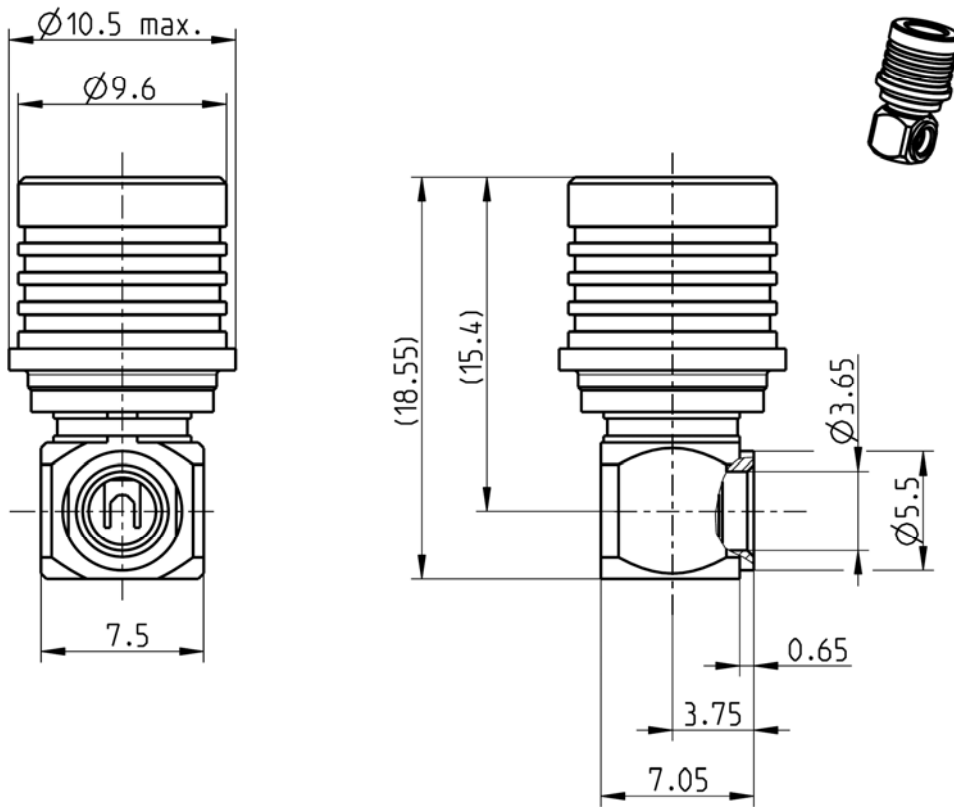


TECHNICAL DATA SHEET		Rosenberger																			
QMA RIGHT ANGLE PLUG		28S208-272N5																			
 All dimensions are in mm; tolerances according to ISO 2768 m-H Interface According to Rosenberger 28S000-000, series QMA Rosenberger is an authorised QLF® manufacturer Documents Assembly instruction 28 C3 Material and plating <table><tr><td>Connector parts</td><td>Material</td><td>Plating</td></tr><tr><td>Center contact</td><td>Brass</td><td>AuroDur®, gold plated</td></tr><tr><td>Outer contact</td><td>Spring bronze</td><td>White bronze(e.g. Optalloy®)</td></tr><tr><td>Body</td><td>Brass</td><td>Flash white bronze over silver(e.g. Optargen®)</td></tr><tr><td>Dielectric</td><td>PTFE</td><td></td></tr><tr><td>Unlocking sleeve</td><td>Brass</td><td>White bronze(e.g. Optalloy®)</td></tr></table>				Connector parts	Material	Plating	Center contact	Brass	AuroDur®, gold plated	Outer contact	Spring bronze	White bronze(e.g. Optalloy®)	Body	Brass	Flash white bronze over silver(e.g. Optargen®)	Dielectric	PTFE		Unlocking sleeve	Brass	White bronze(e.g. Optalloy®)
Connector parts	Material	Plating																			
Center contact	Brass	AuroDur®, gold plated																			
Outer contact	Spring bronze	White bronze(e.g. Optalloy®)																			
Body	Brass	Flash white bronze over silver(e.g. Optargen®)																			
Dielectric	PTFE																				
Unlocking sleeve	Brass	White bronze(e.g. Optalloy®)																			
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de																			
		Page 1 / 2																			

TECHNICAL DATA SHEET

Rosenberger

QMA RIGHT ANGLE PLUG

28S208-272N5**Electrical data**

Impedance	50 Ω
Frequency	DC to 18 GHz
Return loss	≥ 32 dB, DC to 3 GHz ≥ 28 dB, 3 to 4 GHz ≥ 25 dB, 4 to 6 GHz
Insertion loss	$\leq 0.05 \times \sqrt{f(\text{GHz})}$ dB, DC to 6 GHz
Insulation resistance	$\geq 5 \times 10^3$ M Ω
Center contact resistance	≤ 3 m Ω
Outer contact resistance	≤ 2.5 m Ω
Test voltage, at sea level, 50Hz	1000 V rms
Working voltage, at sea level, 50Hz	335 V rms
RF-leakage	≥ 95 dB up to 2 GHz ≥ 80 dB up to 4 GHz ≥ 70 dB up to 6 GHz
Intermodulation (3 rd order)	≤ -130 dBc @ 2 x 20 W

*- Limitations are possible due to the used cable type -***Mechanical data**

Mating cycles	min. 100
Center contact captivation: axial	≥ 20 N
Engagement force	typ. 25 N
Disengagement force	typ. 20 N
Retention force for interface	60 N min.

Environmental data

Temperature range	-40°C to +85°C
Storage temperature	-40°C to +85°C
Thermal shock	IEC 60169-1 16.4 (-40 / +85°C)
Corrosion	IEC 60169-1 16.7 (48 hrs)
Vibration	IEC 60068-2-64 random
Damp heat, steady state	IEC 60169-1 16.3 (96 hrs)
RoHS	compliant

Tooling

N/A

Suitable cables

UT 141, RG 402

Weight

Weight 5.8 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
M. Schmid	17/07/08	Sa. Krautenbacher	13.03.14	c00	14-0352	T. Krojer	13.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de			Page 2 / 2