


Series
QMA

QMA receptacle connector
integrated strain relief
for rail mounting

Issue:
Apr. 10, 2018

Page
1/2

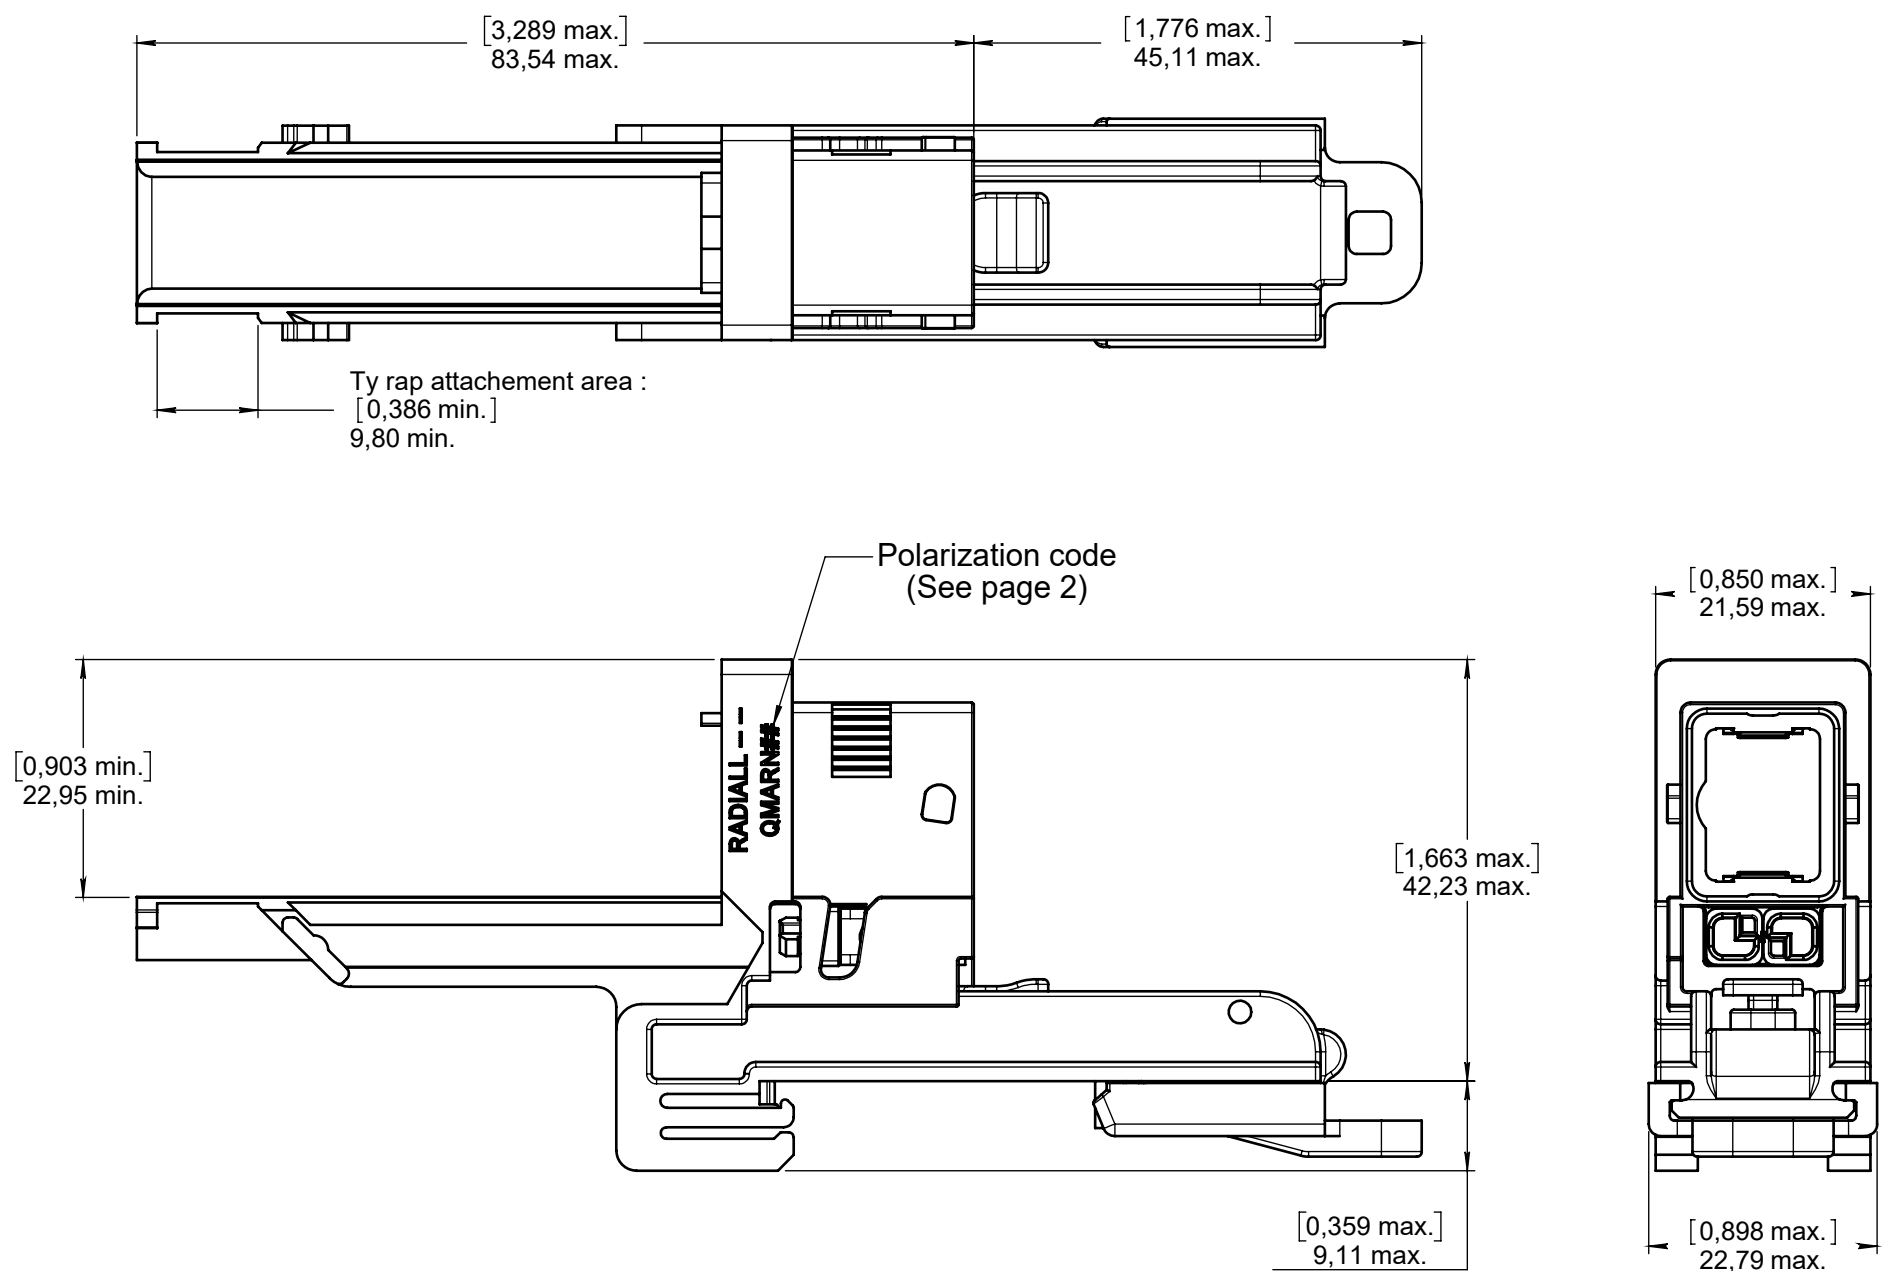


MATERIALS & FINISHES :


- PLUG SHELL : High grade thermoplastic, nickel plated,
- RAIL LOCKING DEVICE : High grade thermoplastic,
- SPRING : Stainless steel,
- INSERT RETENTION CLIP : Beryllium copper alloy,
- POLARIZATION KEYS : High grade thermoplastic,
- DUST CAP : Thermoplastic.

NOTA :

- Please refer to MIIN1700000 for unlocking instructions.

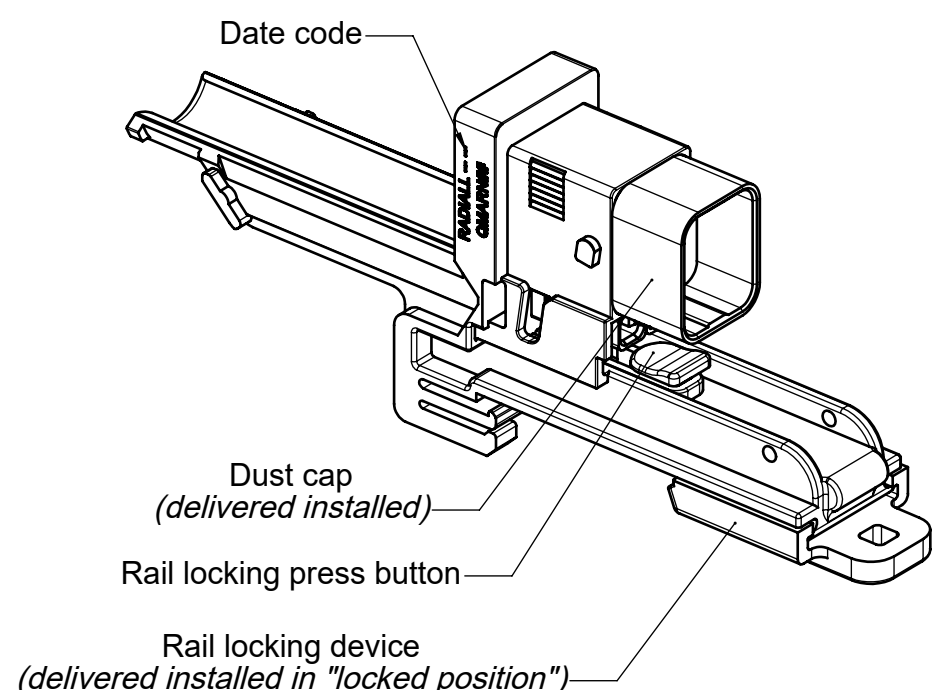

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 39 g

CREATION				
PEN:				
NOM: BELEY T.	Apr. 10, 2018	Updated title and mounting instruction number	Legendre T.	Lopez C.
DATE: Jul. 16, 2015	Mar. 20, 2018	Erased "Preliminary" on TDS. Added overall height dimension. Updated dimensions and view for uniformity.	LOPEZ C.	PAILOT N.
APPR.: VIEIRA D.	Issue	Revisions	Name	Approved


Radiall S.A. is licensed by Boeing Intellectual Property Licensing Company, a subsidiary of The Boeing Company, to utilize certain Boeing patented technologies in this product

QMARNEN


RADIAL PROPRIETARY INFORMATION

RADIALL P/ N	KEY 1	KEY 2
QMARN	uninstalled	
QMARN 00	without keys	
QMARN AA	A	A
QMARN AB	A	B
QMARN AC	A	C
QMARN AD	A	D
QMARN BA	B	A
QMARN BB	B	B
QMARN BC	B	C
QMARN BD	B	D
QMARN CA	C	A
QMARN CB	C	B
QMARN CC	C	C
QMARN CD	C	D
QMARN DA	D	A
QMARN DB	D	B
QMARN DC	D	C
QMARN DD	D	D

PLUG SHELL POLARIZATION :

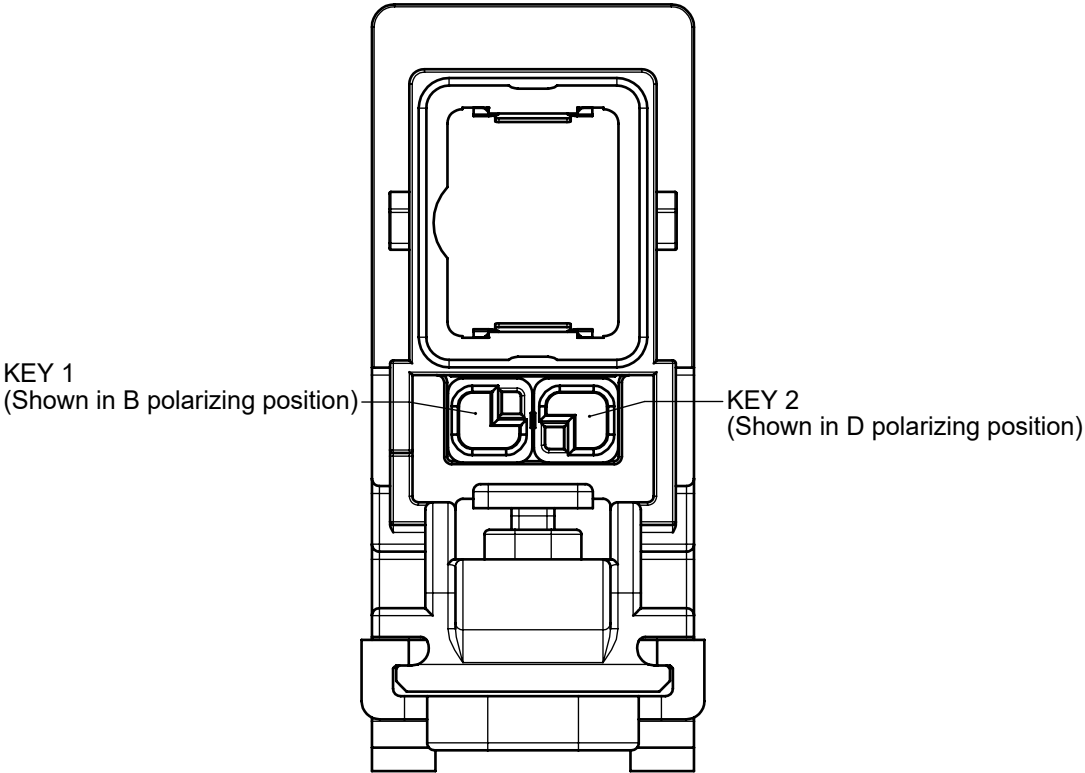

EXAMPLE : QMARN BD shown.

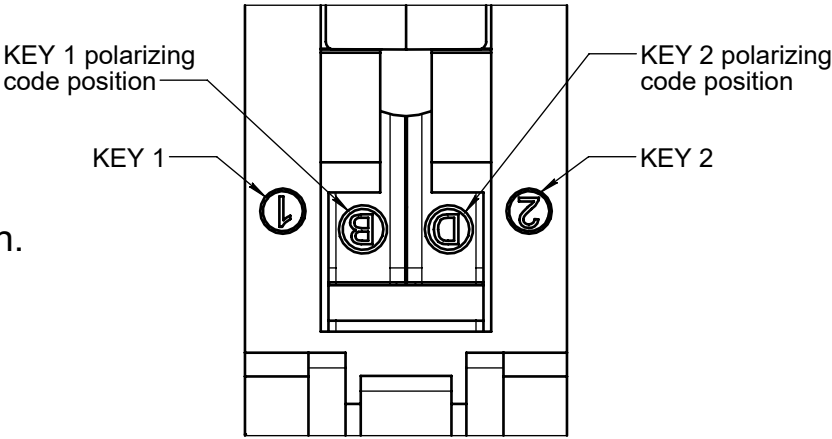

Each polarizing key has four polarizing positions (A,B,C and D). The polarizing code corresponds to the combination of 2 letters which can be read directly on lower side of the connector.