

SAFETY ORGANIZATION(S).

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

- UL RECOGNIZED
- UL 1283
- CSA 22.2, NO. 0.0.4.8
- VDE 565-3
- SEV 1055/TP1977/S.1.1

OPERATING SPECIFICATIONS.

- LINE VOLTAGE/CURRENT, 6 AMP., 120/250 VAC
- 5 AMP., 40°C, 250 VAC
- LINE FREQUENCY, 50-60Hz
- MAX. LEAKAGE CURRENT, EACH .25mA at 120V 60 Hz
- LINE TO GROUND .4mA at 250V 50 Hz
- OPERATING AMBIENT TEMP. RANGE, -10°C TO +40°C @ RATED CURRENT, I_L
- IN AN AMBIENT, T_a , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_o , IS AS FOLLOWS.

$$I_o = I_L \sqrt{\frac{85 - T_a}{45}}$$

RELIABILITY SPECIFICATIONS.

- STORAGE TEMPERATURE, -25°C TO +85°C
- HUMIDITY, 21 DAYS @ 40°C 95% RH
- CURRENT OVERLOAD TEST, 6 TIMES RATED CURRENT FOR 8 SECONDS

TEST SPECIFICATIONS.

- INDUCTANCE, 17.46 mH NOMINAL
- CAPACITANCE, (MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C) .0055µF ±20%
- LINE TO GROUND, .81µF ±20%
- LINE TO LINE, 330KΩ
- DISCHARGE RESISTOR, 6000 MΩ (MIN) AT 100 VDC
- LINE/GROUND AND LINE/LINE INSULATION RESISTANCE 20°C AND 50% RH
- (W/O DISCHARGE RESISTOR)

RECOMMENDED RECEIVING INSPECTION HIPOUT.

- 2250 VDC FOR 1 MINUTE
- 1450 VDC FOR 1 MINUTE




FILTER APPROVAL:
THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

TOLERANCE EXCEPT AS NOTED

- DECIMAL, .XXX .XX .X ANGLES ±1°
- ENGLISH, ±.025
- METRIC, ±

MATERIAL: AS SUPPLIED

FINISH:

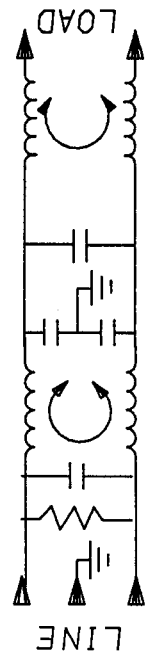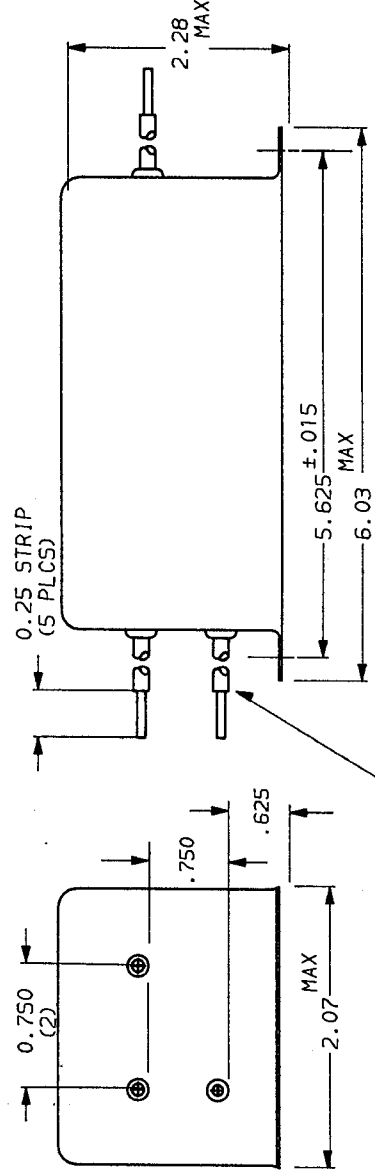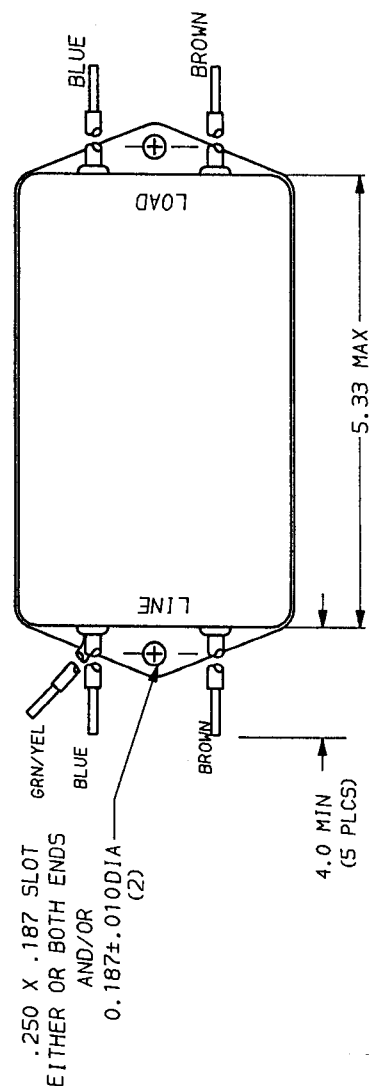

50Ω - 50Ω (MINIMUM) INSERTION LOSS											
FREQUENCY	.01	.04	.05	.06	.15	.5	5.0	10	20	30	
COMMON	1	1	10	18	58	65	65	60	38	25	
DIFF.	1	2	3	3	30	65	65	65	35	35	

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.



LIBERTYVILLE, IL 60048

POWER LINE FILTER