
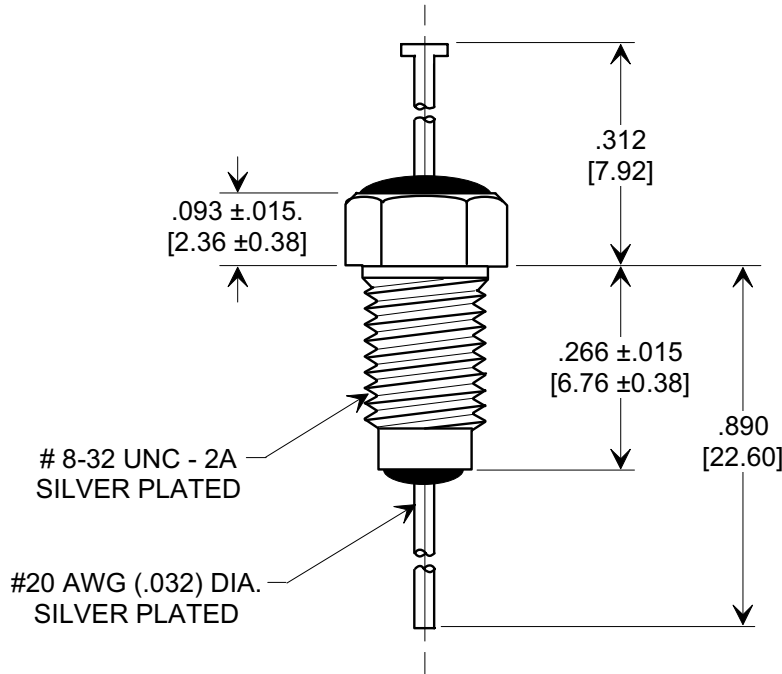
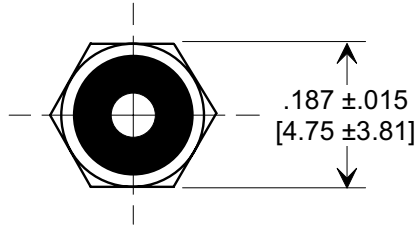




MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []


Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MOUNTING HARDWARE

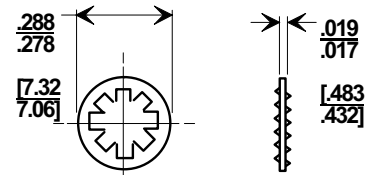

LOCK WASHER



HEX NUT

NOTE:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. MOUNTING TORQUE NOT TO EXCEED 3 lb-in.

MIN. CAP (pF)	WORKING VOLTAGE		CURRENT	MINIMUM NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
	85°C	125°C		50 MHz	100 MHz	1 GHz	10 GHz
2500	200	100	10A	25	45	60	60

X-2015 Rev-0 REVISION RECORD Original Release C.O. 19990713-1-02 NOTE 2 ADDED L.E. 09-12-01 20010912-1-01 SYMBOL ORIENTATION & CIRCUIT ADDED, HEX & NUT DRAWING ADDED NOTE 2 REV'D 3 lbs-in. WAS 5 lbs-in L.E. 09-13-01 20010913-4-01	0	--TOLERANCES-- Unless Otherwise Specified DECIMAL ± .031 ANGLES ±	Title MIL-15733/28-0001 BUSHING STYLE EMI FILTER		
	NOTE 2 ADDED L.E. 09-12-01 20010912-1-01 SYMBOL ORIENTATION & CIRCUIT ADDED, HEX & NUT DRAWING ADDED NOTE 2 REV'D 3 lbs-in. WAS 5 lbs-in L.E. 09-13-01 20010913-4-01		Drawn S.M. 07-15-99 Scale 4 X		
	Approved E.F. 07-15-99		TUSONIX TUCSON, ARIZONA	A	4201-501

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[4201-501](#)