


This drawing is the property of
Tusonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tusonix Inc.

MARKETING SALES DRAWING



DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

DIMENSIONS IN METRIC - []

ALL METAL PARTS SILVER PLATED

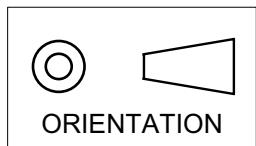

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

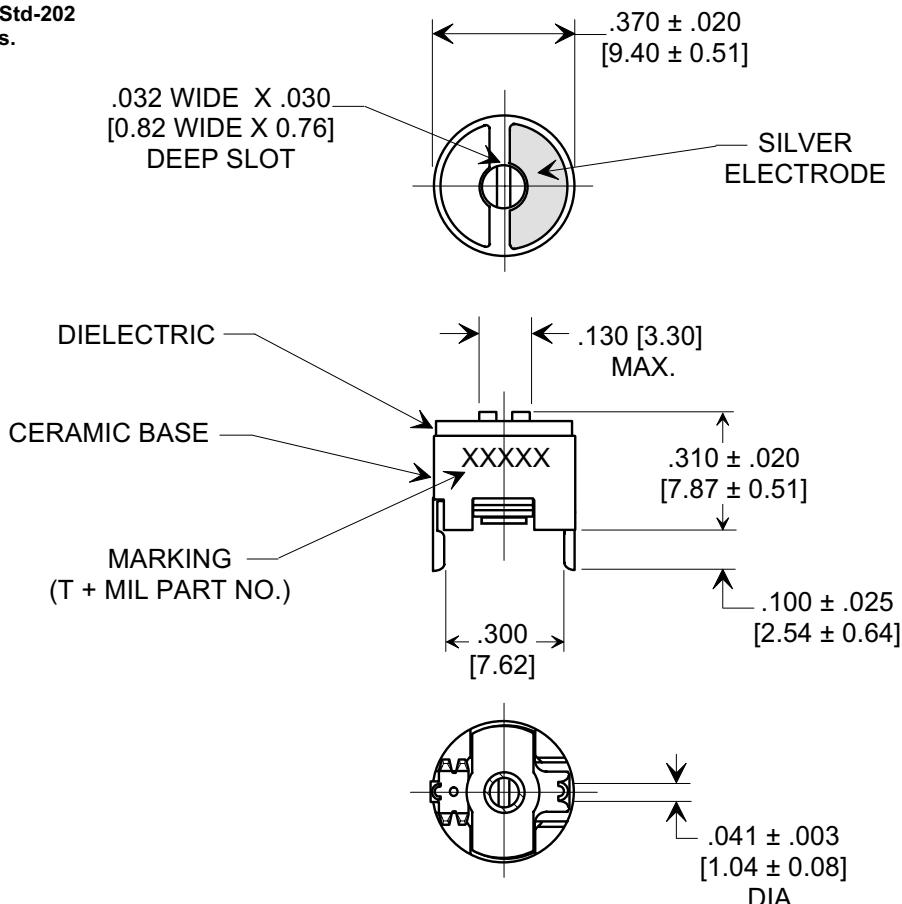

TYPICAL MOUNTING
HOLE LAYOUT

SPECIFICATIONS

TUSONIX STYLE	538-054
CAPACITANCE RANGE:	15 - 60 pF
CAPACITANCE TOLERANCE:	MIN: +0% , MAX: -0, +50%
TEMPERATURE CHARACTERISTIC:	DIELECTRIC CODE F
WORKING VOLTAGE:	200 VDC AT + 85°C
OPERATING TEMPERATURE RANGE:	-55°C TO + 125°C
TO MIL - C - 81/4E CV31E600	

TOLERANCES
unless otherwise specified

2 PLC.
DECIMAL ± //

3 PLC.
DECIMAL ± .010 [0.25]

ANGLES ± //

Title

**CERAMIC
TRIMMER**

Drawn S.M. 10-03-07

Scale 2 X

Approved R.L. 10-03-07

A

538-054 F 15.0 - 60