


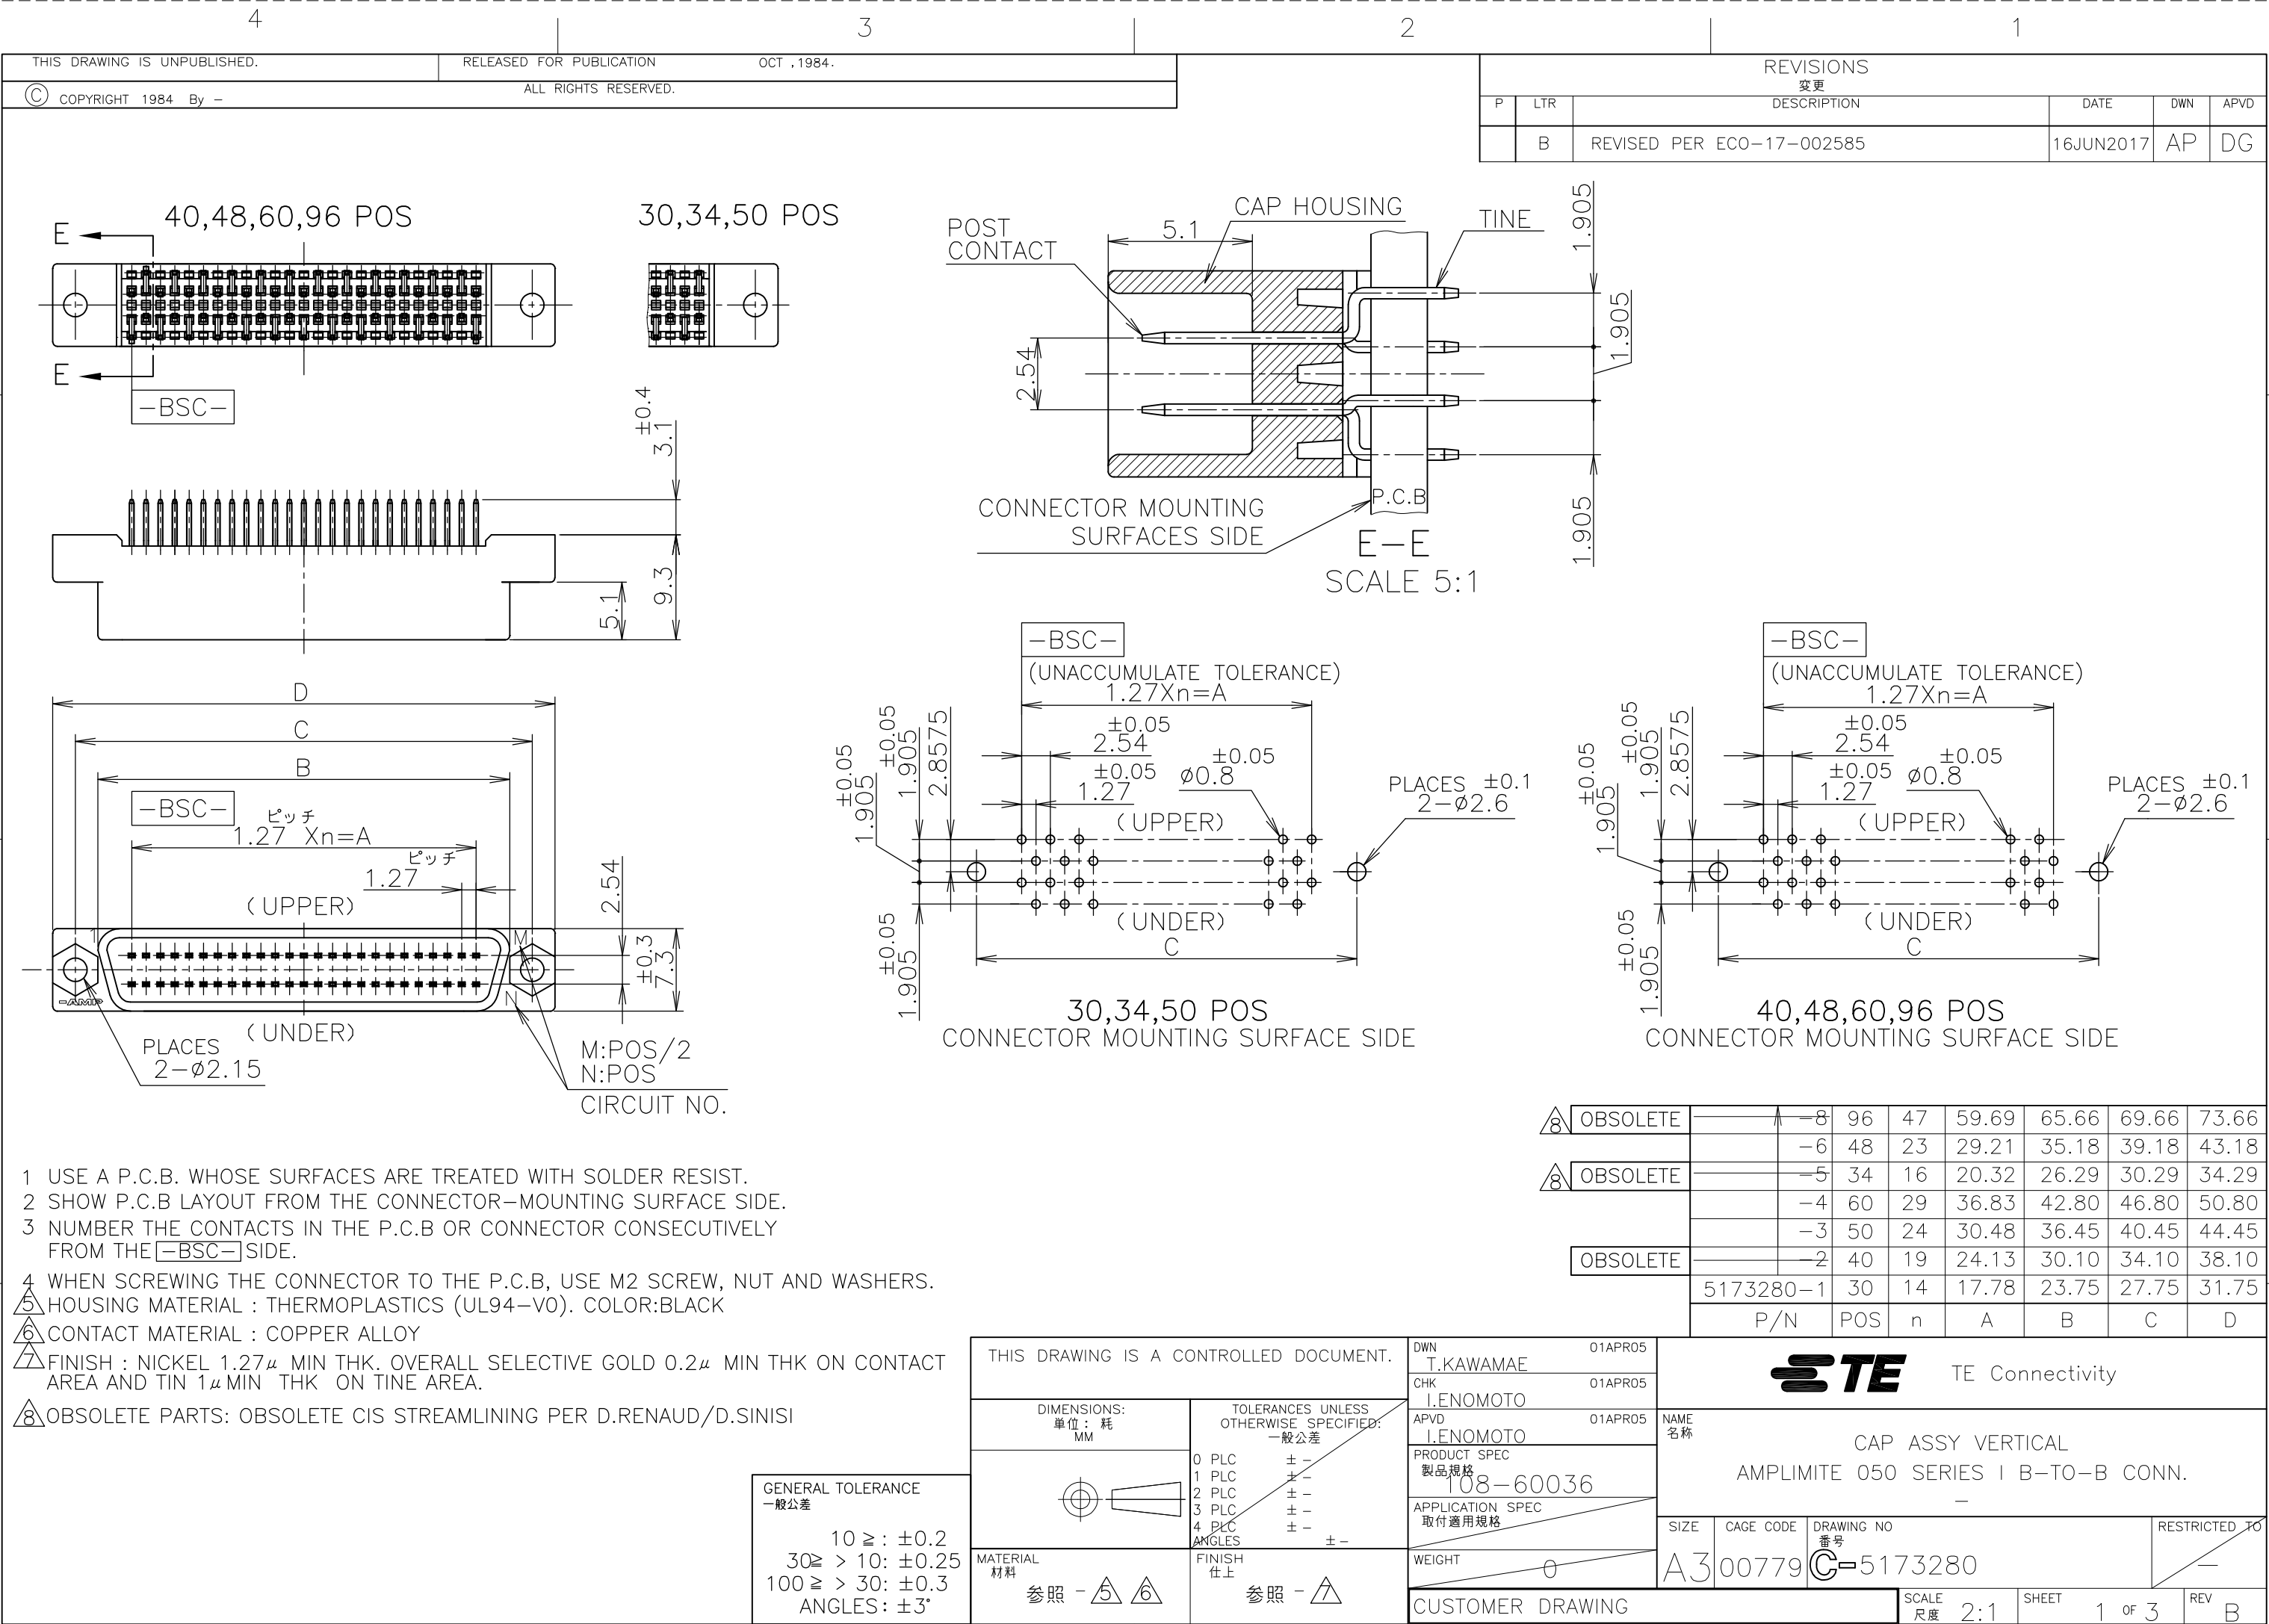
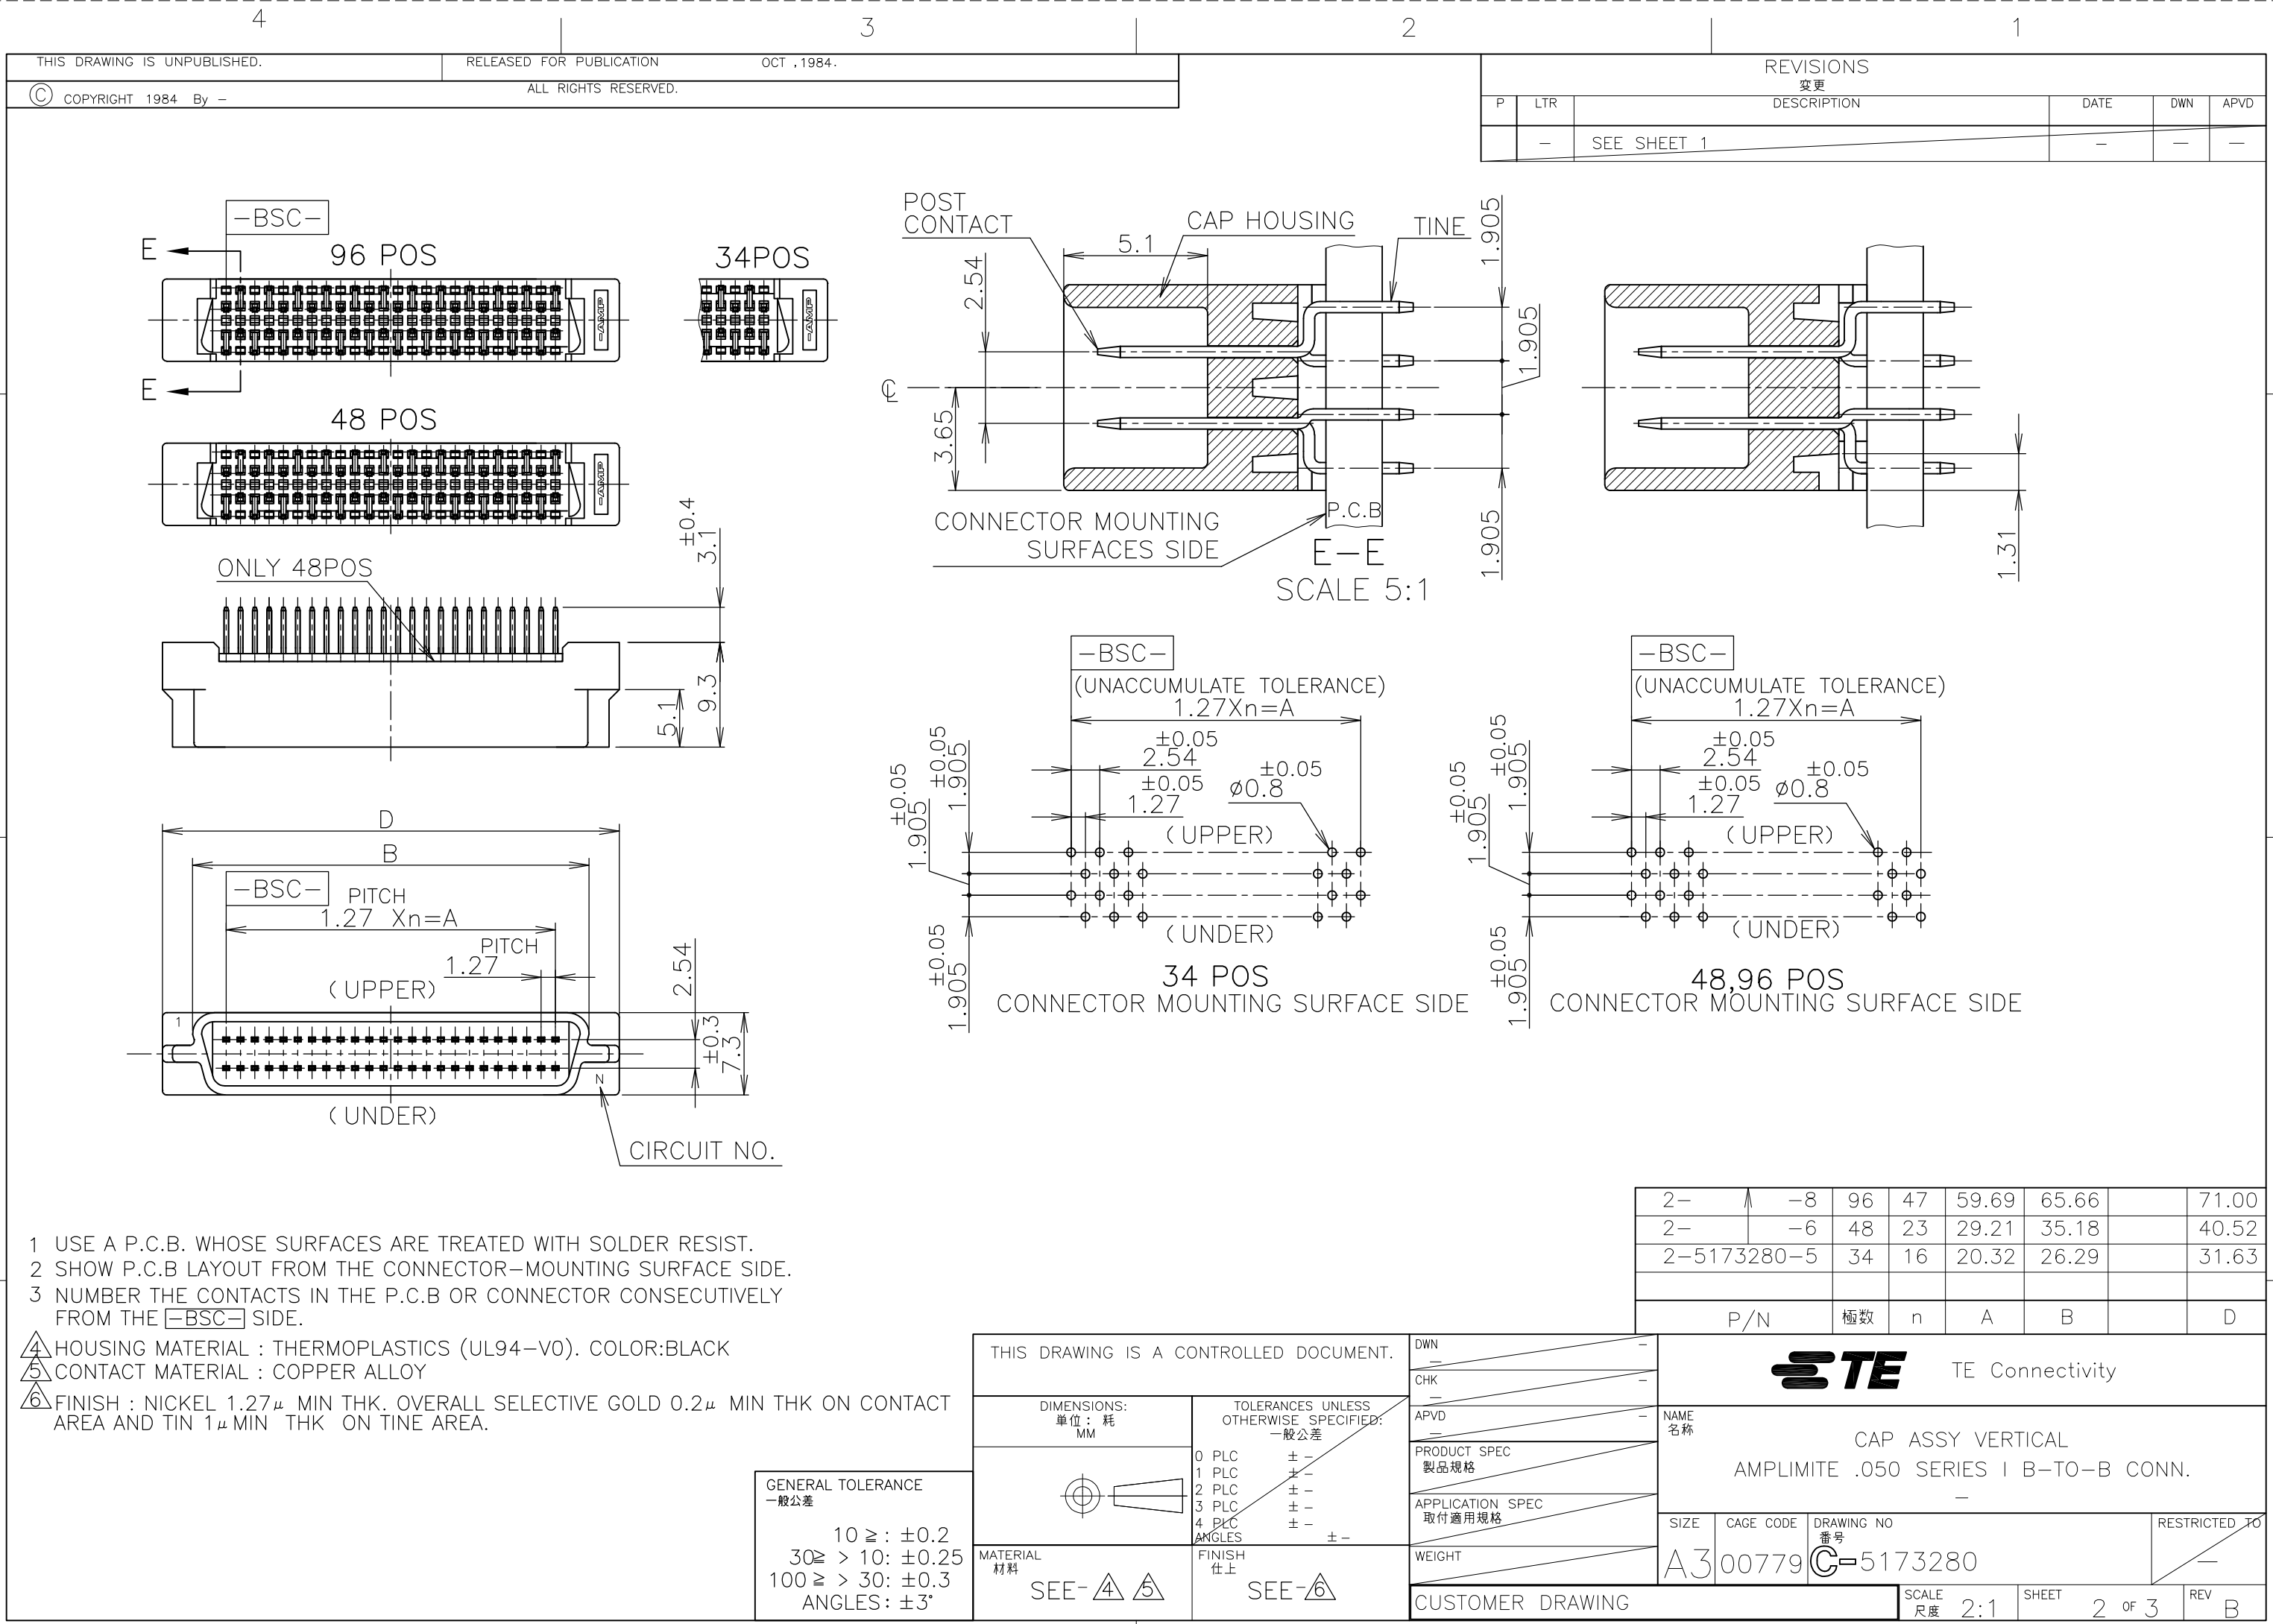
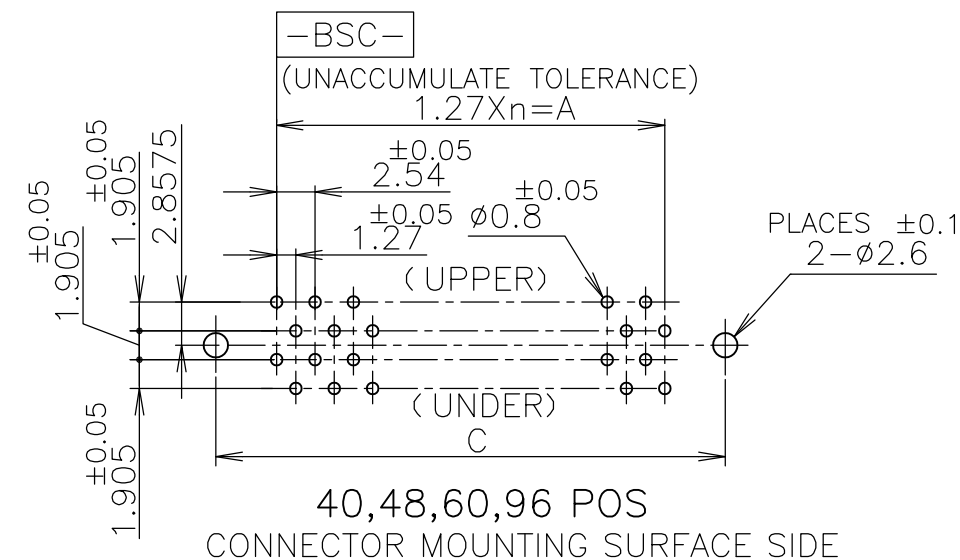
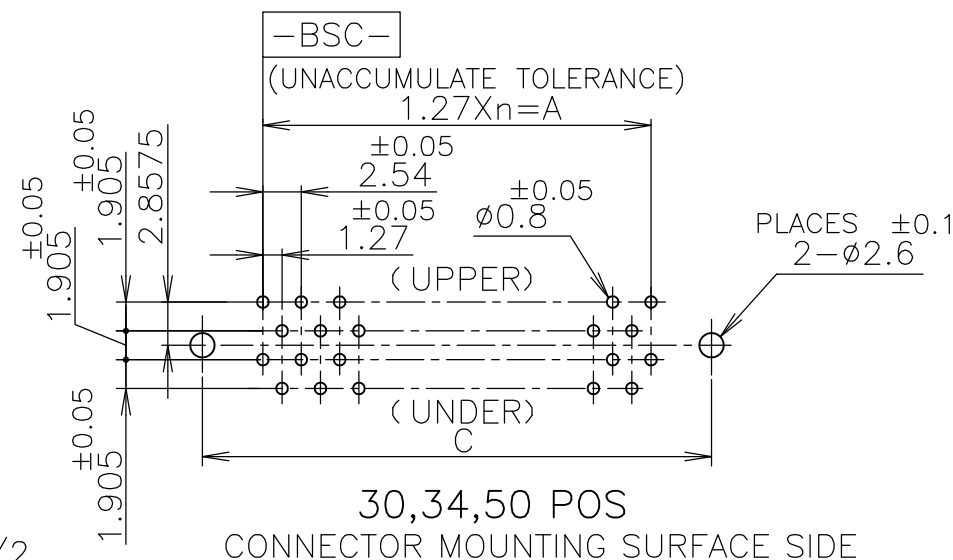
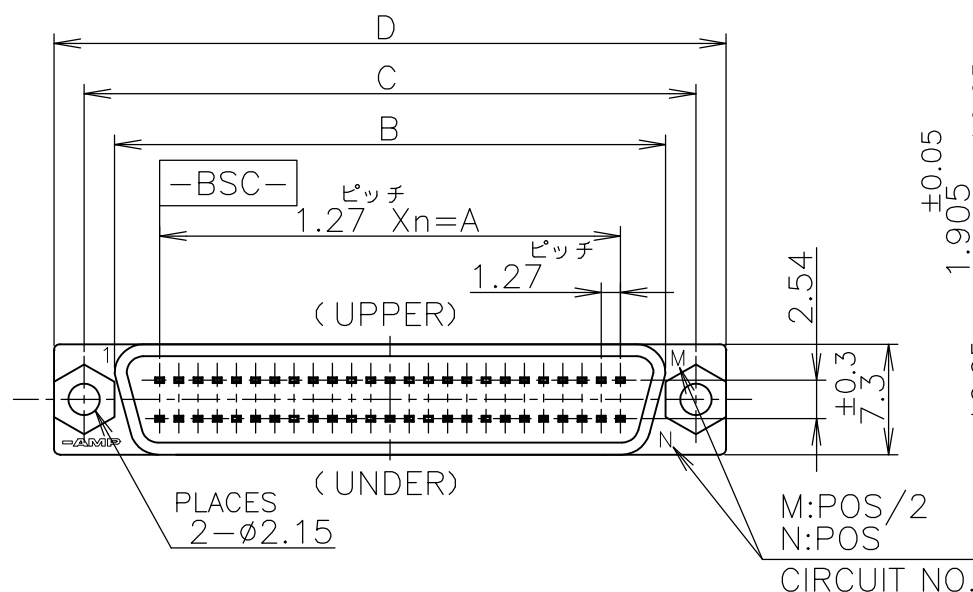


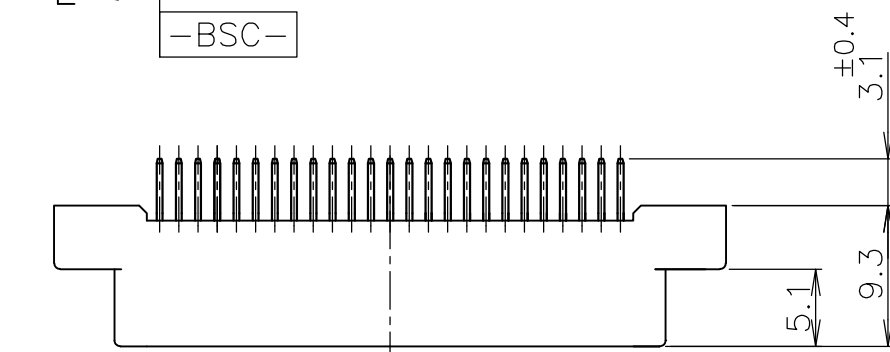

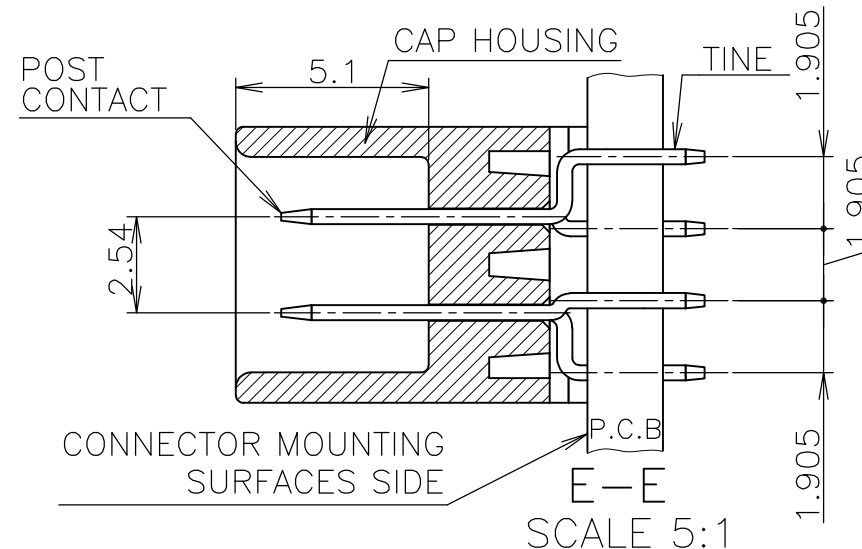

1470-19 (1/15)

P	LTR	DESCRIPTION	DATE	DWN	APV
	—	SEE SHEET 1	—	—	—

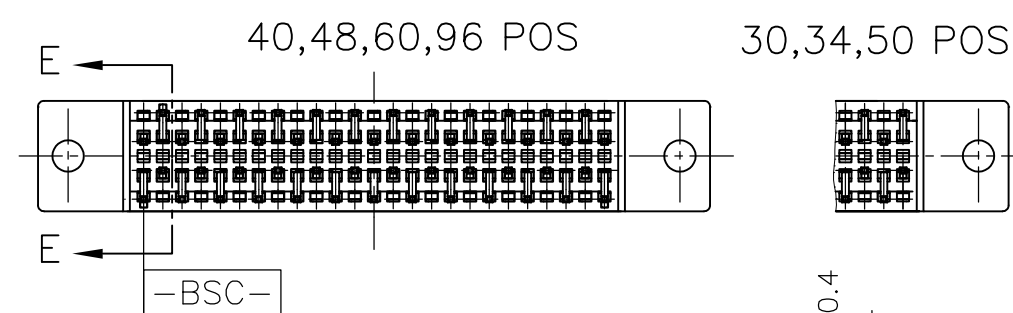

- 1 USE A P.C.B. WHOSE SURFACES ARE TREATED WITH SOLDER RESIST.
- 2 SHOW P.C.B LAYOUT FROM THE CONNECTOR-MOUNTING SURFACE SIDE.
- 3 NUMBER THE CONTACTS IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM THE BSC SIDE.
- 4 WHEN SCREWING THE CONNECTOR TO THE P.C.B, USE M2 SCREW, NUT AND WASHERS.
- 5 △ HOUSING MATERIAL : THERMOPLASTICS (UL94-V0). COLOR:BLACK
- 6 △ CONTACT MATERIAL : COPPER ALLOY
- 7 △ FINISH : NICKEL 1.27 μ MIN THK. OVERALL SELECTIVE GOLD 0.76 μ MIN THK ON CONTACT AREA AND TIN 1 μ MIN THK ON TINE AREA.

6-	↑	-8	96	47	59.69	65.66	69.66	73.66
6-		-6	48	23	29.21	35.18	39.18	43.18
6-		-5	34	16	20.32	26.29	30.29	34.29
6-		-4	60	29	36.83	42.80	46.80	50.80
6-		-3	50	24	30.48	36.45	40.45	44.45
6-		-2	40	19	24.13	30.10	34.10	38.10
6-5173280-1			30	14	17.78	23.75	27.75	31.75
P/N			POS	n	A	B	C	D

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
單位：耗
MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

0	PLC	$\pm$	-
1	PLC	$\pm$	-
2	PLC	$\pm$	-
3	PLC	$\pm$	-
4	PLC	$\pm$	-
5	ANGLES		+

MATERIAL
材料 SEE - 5 6
参照

FINISH
仕上 SEE - 

	DWN
--	-----

CH

APV

PRODUCT SPEC

製品規格

APPLICATION SPEC

取付適用規格	
--------	--

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME 名称	CAP ASSY VERTICAL
	AMPLIMITE .050 SERIES I B-TO-B CONN.

	SIZE
--	------

CAGE CODE	
-----------	--

DRAWING NO.

A

300779

④ C-5173280

RESTRICTED TO

SCALE 尺度	2:1
-------------	-----

SHEET 3 OF 3

REV	
-----	--