


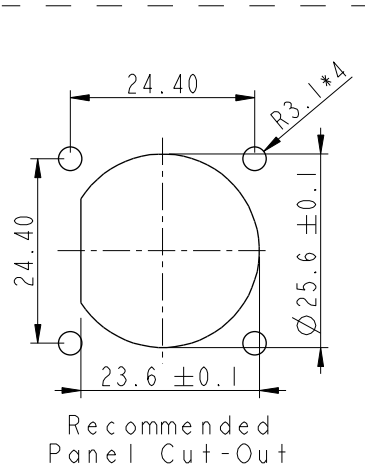

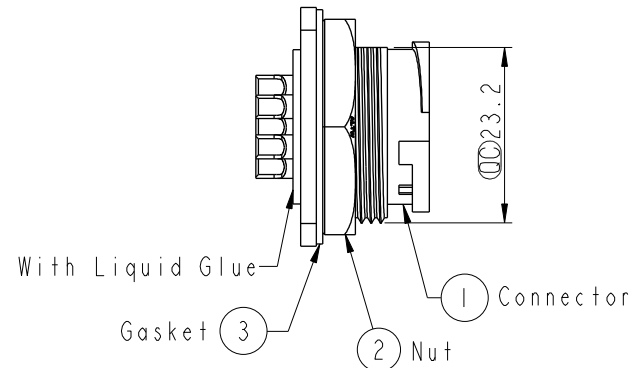



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0200	2008/09/15	Shin	Add Notes
C	LEN1520142	2015/1/8	Lu Di	Update LOGO
D	CI90314	2019/03/12	Ruru	Modify Note

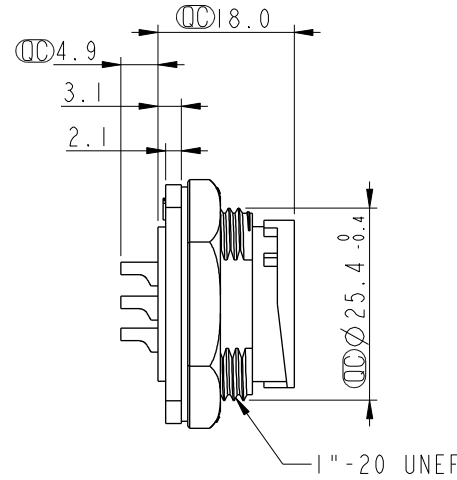

Pin Assignments
Front View



NOTE:

* Important Dimension.

* Waterproof Rate: IP67, Unmated

* Housing: Thermoplastic, Black

* Pin: Copper Alloy, Gold Plated

* Nut: Thermoplastic, Black

* Gasket: Rubber, Black

* Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm

* Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Large Panel Lock 7Pin M Conn M Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. A.3	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO DC-07PMMS-LS7001	DRAWN BY Ruru	DATE 2019-03-12
DWG NO DC-07PMMS-LS7001	CHECKED BY Rita	DATE 2019-03-12
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.