

2



1


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CP48HDBL	6.15 LB/10 PCS 12788.0 g/10 PCS

NOTES:

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS WITH THIS WIRING SYSTEM
2. THE HIGH DENSITY PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
3. PACKAGE CONTAINS:
 - (1) 48 PORT STAMPING
 - (6) 8 POSITION FACEPLATES (ASSEMBLED TO PANEL)
 - (6) GROUNDING STRIPS (ASSEMBLED TO PANEL)
 - (1) SCREW KIT (INCLUDES FOUR #12-24 SCREWS)
 - (1) SCREW KIT (INCLUDES FOUR M6 SCREWS)
 - (2) M6 GROUNDING SCREWS
 - (2) #12-24 GROUNDING SCREWS
4. DIMENSION IN [] ARE IN METRIC.

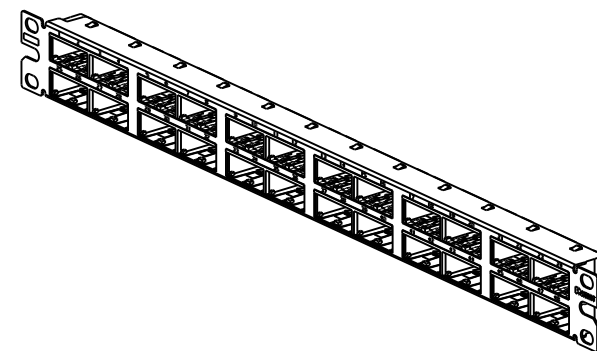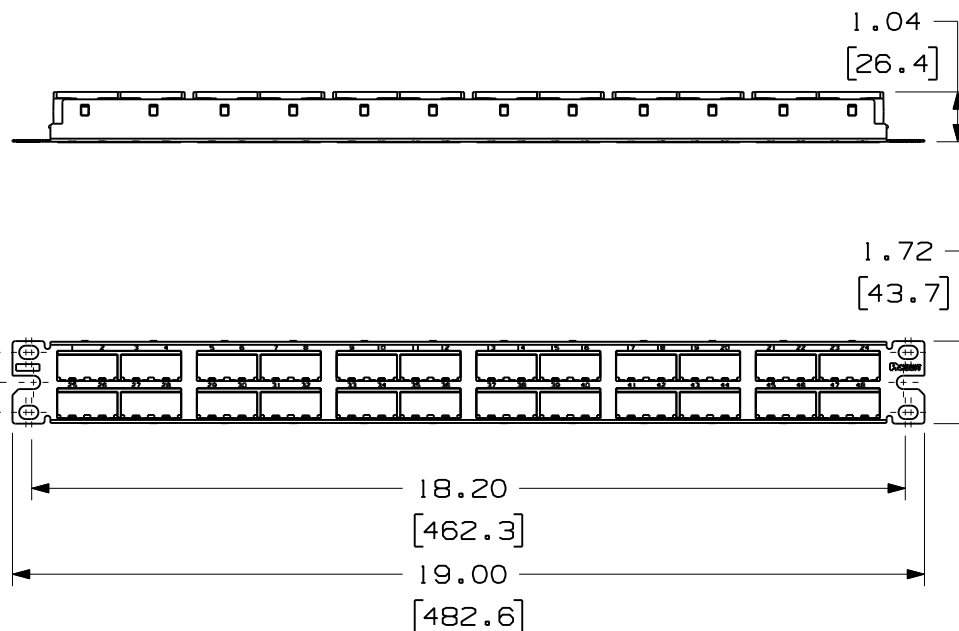

PART NUMBER		PRODUCT SPEC/PKG SPEC	
CP48HDBL		N/A	
I.T. NUMBER		WORK INSTRUCTION	
N/A		N/A	
TITLE			
MINI-COM 48 PORT HIGH DENSITY SHIELDED MODULAR PATCH PANEL			
CUSTOMER DRAWING			
ITEM REVISION NAME		PANDUIT TM	
11M249AQ/00.PRT			
DATASET FILE NAME			
11M249AQ_DC/00A.PRT			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL :	
.x : .xxx : .010 [.3]		STAMPING-18 GAUGE	
.xx : .03 [.8]		STAINLESS STEEL	
ANGLES :		GROUNDING STRIP-	
		PHOS BRONZE	
		FACEPLATE-ABS	
		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		11M249AQ-02	
DRAWN BY	DATE	CHK	SCALE
BJN	11-26-12	JSP	NONE
SHT 1 OF 1		SIZE	
A			

2

1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	11-26-12	BJN	JSP	JSP	RELEASED TO PRODUCTION	11M249AQ-02