


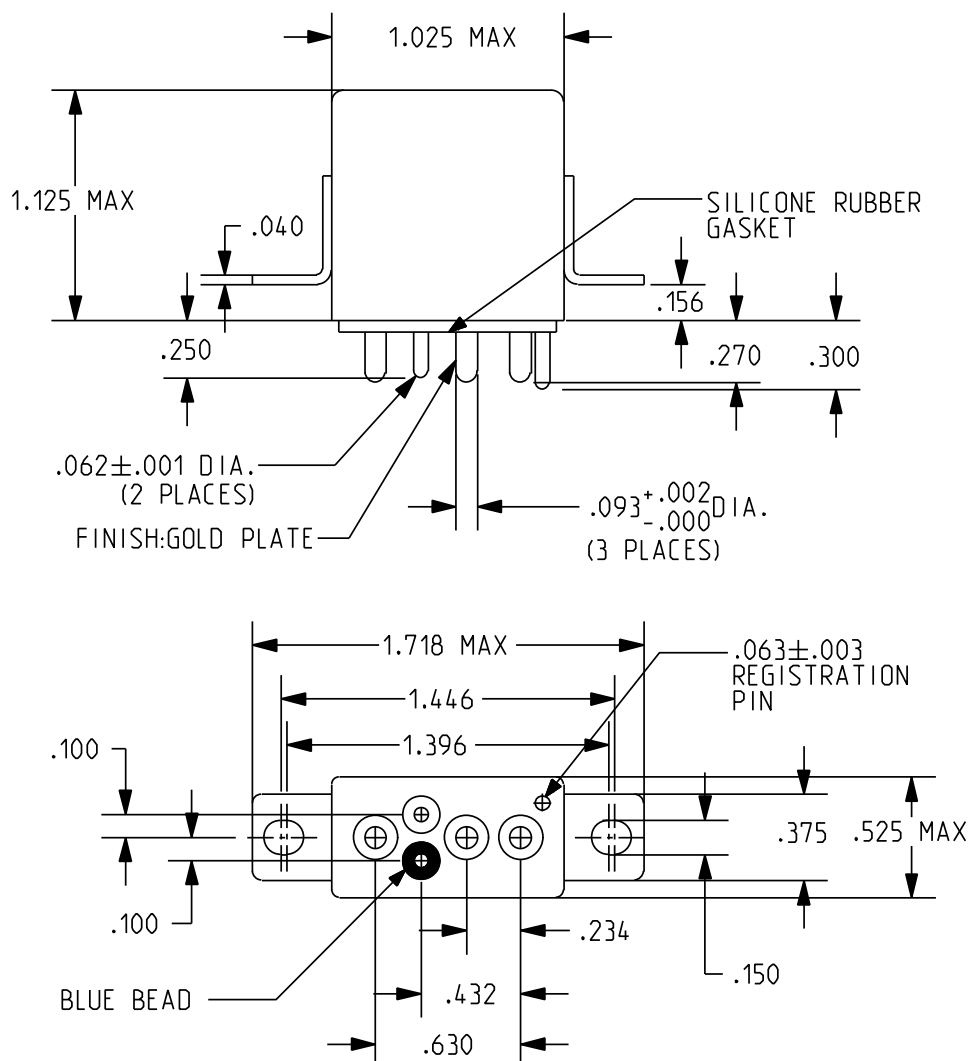

REV. A
DCO 300860

TOLERANCES $\pm .010"$ - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE

CURRENT: 30 mA MAX.

NOMINAL VOLTAGE

115 VAC - 50-400 Hz

MUST OPERATE

70.0 VAC MAX., 50-400 Hz

MUST RELEASE

25.0 VAC MAX., 8.0 VAC MIN., 50-400 Hz

ENVIRONMENT:

VIBRATION 33 Hz TO 3000 Hz @ 30 g's

SHOCK 200 g's 6 MS. DURATION

TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.

RELEASE TIME 50 MS MAX.

CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

A1 - X2 A2 A3

AC

+ X1

BLUE BEAD

TERMINAL VIEW

CONTACT RATING:

25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE

50,000 OPERATIONS

DR. B.D. 21MAY2008

CK. J.M.B. 5/21/08



Tyco Electronics

©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. CATALOG ITEM

TE NUMBER

CII PART NUMBER

CUST. NO. ---- REV. ----

8-1617748-6

FC A-125-DY9