

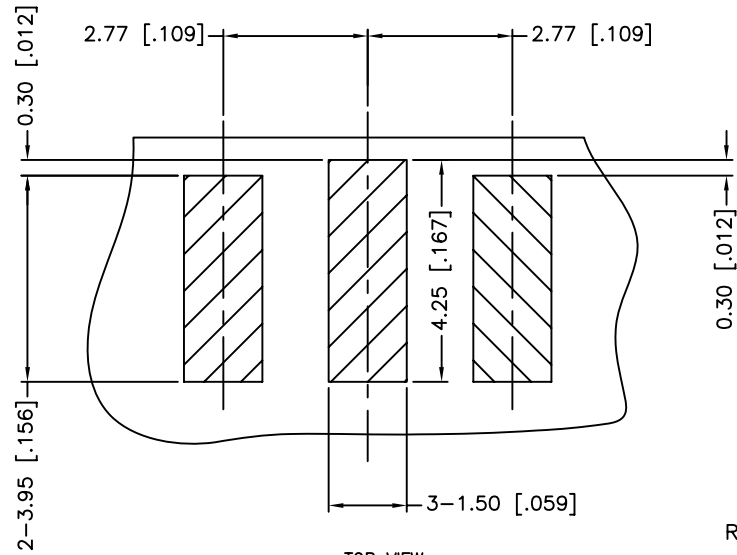
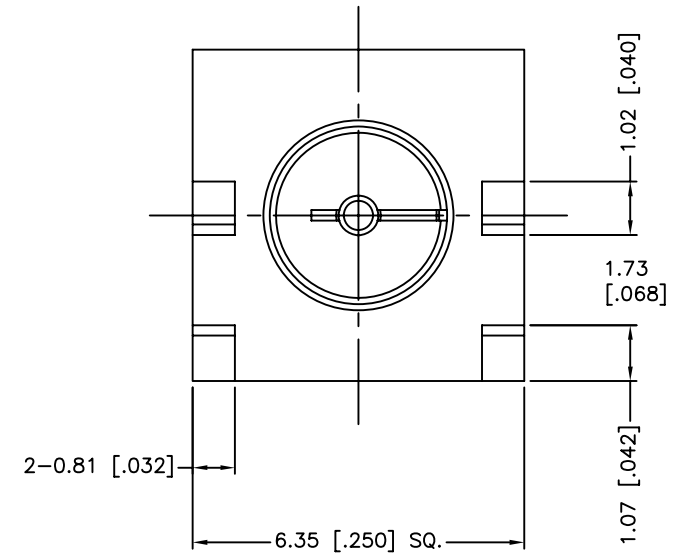


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/08/10	XXXXXX	INITIAL RELEASE

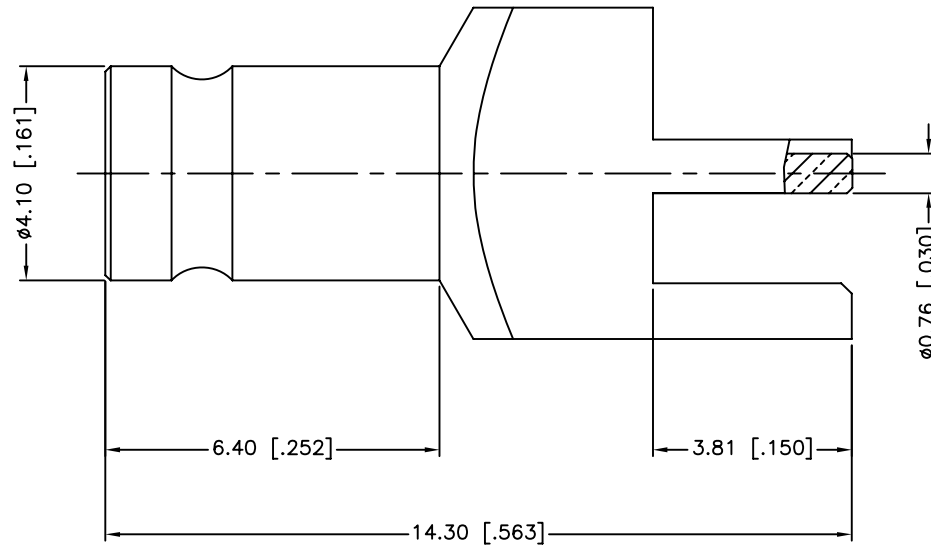

RECOMMENDED PCB LAYOUT

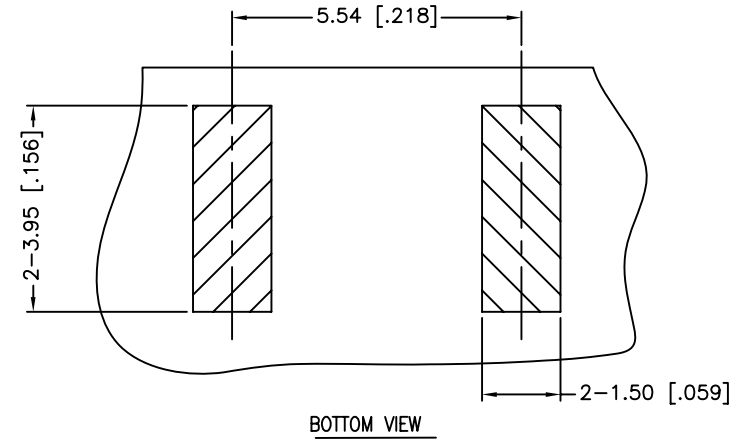

- FREQUENCY RANGE: 0 – 3 GHz
- VSWR (RETURN LOSS): 1.15 MAX.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex									
					DRAWN	M.ZHANG	03/08/10											
					CHECKED													
					ISSUED			PART DESCRIPTION 1.0/2.3 END LAUNCH RECEPT. JACK – 75 OHM (.062” BOARD THICKNESS)										
					SHEET	1 OF 1												
					PART NO.				282132–75									
					CAD FILE		C:/CONNEX/282132–75.DWG		DWG. NO.		282132–75.DWG		REV.	NC	SIZE	A	SCALE	NA
3	CONTACT PIN		BER. COPPER		GOLD		1											
2	INSULATOR		PTFE		NATURAL		1											
1	BODY		BRASS		GOLD		1											
	DESCRIPTION		MATERIAL		FINISH		QTY											