


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-				
C		ECR-13-004288	15MAR2013	RC	AH

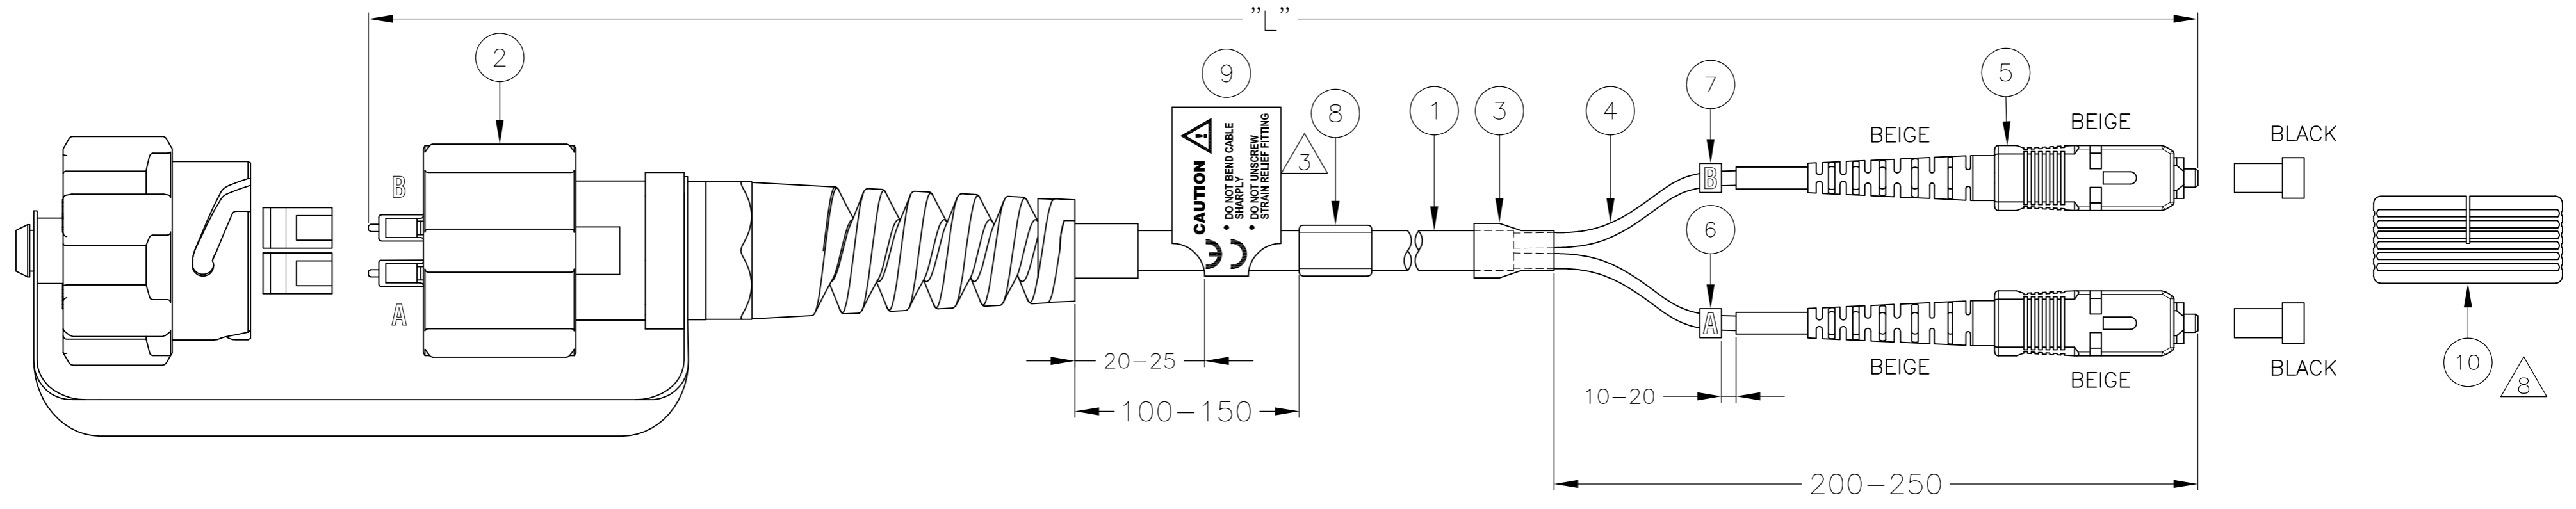

FIBER CONNECTIVITY	
ODVA	SC CONN.
A	A
B	B

PART NUMBER	"L" (METER)		MAXIMUM $\Delta_1$ ATTENUATION (dB)
	MIN	MAX	
1-1920985-0	9.85	10.15	-
2-1920985-0	19.80	20.20	0.55
5-1920985-0	45.50	50.50	0.6
8-1920985-0	79.20	80.80	0.64
8-1920985-1	118.8	121.2	0.7
8-1920985-2	297.0	303.0	1.0
9-1920985-9	99.00	101.00	0.65

- NOTES:**
- 1 MAXIMUM CONNECTOR ATTENUATION IS 0.5 dB PLUS CABLE ATTENUATION OF 1.5 dB/km AT 1300 nm, 155 mbps (SEE TABLE)
  - 2 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
  - 3 INFORMATION ON LABEL SEE DETAIL:
    - BARCODE
    - UNIQUE SERIAL NUMBER
    - ASSEMBLY LENGTH
    - TE CONNECTIVITY PART NUMBER
    - TE CONNECTIVITY ORDER NUMBER
  - 4 CABLE INFORMATION:
    - FIBER CORE DIAMETER: 62.5/125  $\mu$ m
    - OUTER JACKET DIAMETER: 5.5 mm
    - OUTER JACKET COLOUR: BLACK
    - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
  - 5 ENVIRONMENTAL PERFORMANCE -40°C TO +85°C
  - 6 IP67 RATED
  - 7 CABLE, EXTRANAL PLUG COMPONENTS AND CAP ARE UV STABLE
  - 8 CLIP DELIVERED SEPARATE IN THE BAG WITH THE ASSEMBLY

**LABEL DETAIL:** 3



Qty	Description	Item
1	SC DUPLEX CLIP	10
1	FOAC ODVA WARNING LABEL WITH CE-MARKING	9
1	FOAC INFORMATION LABEL	8
1	LABEL "B"	7
1	LABEL "A"	6
2	SC CONNECTOR ASSEMBLY, MULTI MODE, BEIGE	5
2	FOAC PROTECTIVE TUBING, BLACK	4
1	FOAC HEAT SHRINK TUBING, BLACK	3
1	PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP	2
L	FOCAB 5.5 mm 2FOLD, MULTI MODE 62.5/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. COOLEN 03SEP2008	
CHK A. HENGELMOLEN 03AUG2010	
APVD A. HENGELMOLEN 03AUG2010	
PRODUCT SPEC	
APPLICATION SPEC	NAME
WEIGHT	SIZE
CUSTOMER DRAWING	CAGE CODE
SCALE	DRAWING NO
NTS	00779
SHEET	1 of 1
REV	C

FIBER OPTIC LEAD 5.5 mm LC/DPX WITH ODVA ADAPTER - SC/DPX MULTI MODE 62.5/125

SCALE: NTS SHEET: 1 of 1 REV: C