

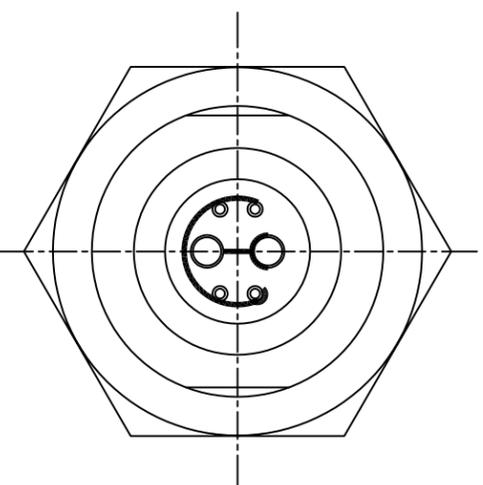



REVISION HISTORY		DATE
REV	DESCRIPTION	
0	CREATION OF DRAWING	10/22/2008

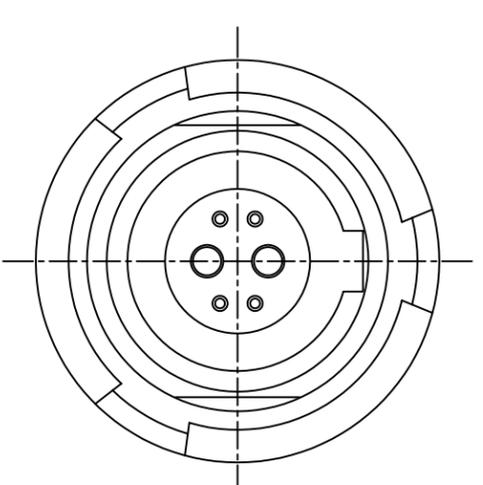

VIEW FROM TERMINATION  
SIDE OF INSERT

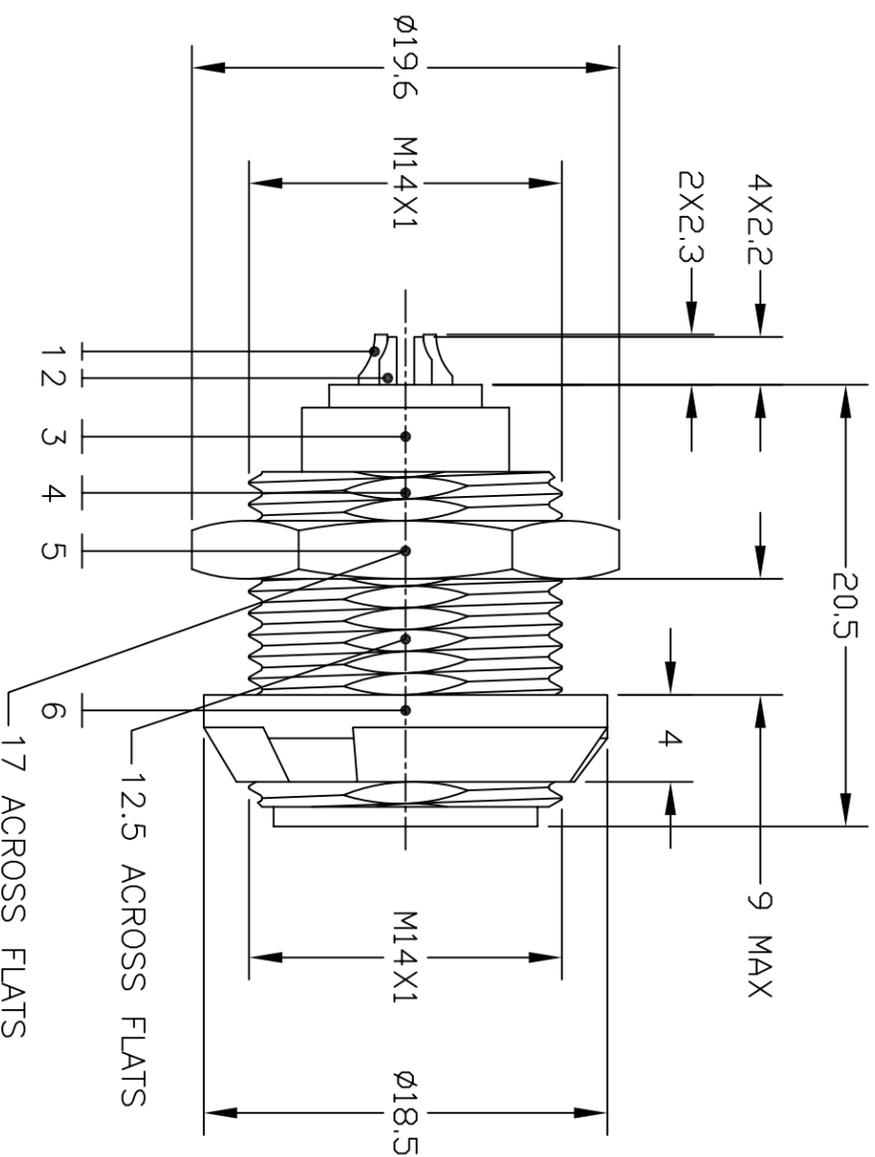

"G" KEYWAY

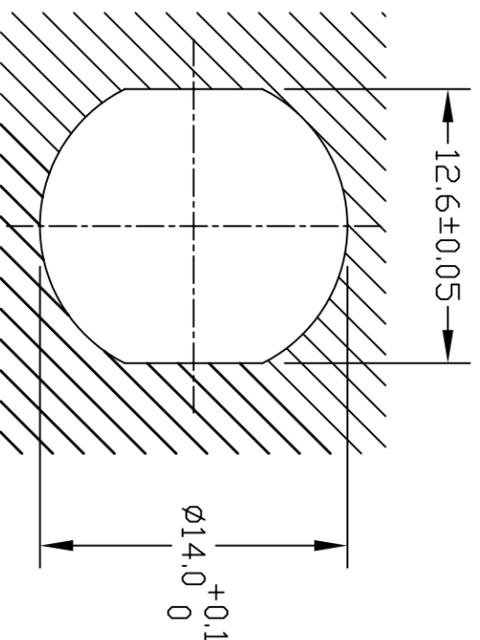

PANEL HOLE CUTOUT

6	FRONT NUT	BLACK PSU	
5	HEX NUT	BRASS	NICKEL
4	OUTER SHELL	BLACK PSU	
3	INSERT	PEEK	
2	Ø0.5 FEMALE CONTACT	BRONZE	GOLD OVER NICKEL
1	Ø1.3 FEMALE CONTACT	BRONZE	GOLD OVER NICKEL
NO.	SPECIFICATION	MATERIAL	SURFACE TREATMENT

MAXIMUM TORQUE VALUE OF  
MOUNTING NUT: 13 IN-LBS.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:		THIRD ANGLE PROJECTION		LEMO USA, INC. P.O. BOX 2408 ROHNERT PARK, CA 94927-2408 (800) 444-5366 WWW.LEMOUSA.COM	
DECIMALS	.XX ±	ANGLES	±	APPROVALS	DATE
X ±	.XX ±			ANN DAVIS	10/22/08
X ±	.XXX ±			CHECKED RON HENNON	10/22/08
MATERIAL				ISSUED PAUL MATTERI	10/22/08
SPECIFICATION		FIXED SOCKET WITH TWO NUTS		SIZE	CAGE CODE
				B	DWG NO.
				SCALE	PKG.MO.6NY.LN
				3:1	REV
					0
				SHEET	1 OF 1

DO NOT SCALE DRAWING