


LioN-R EtherNet/IP I/O Rugged Modules with 16 Digital Inputs

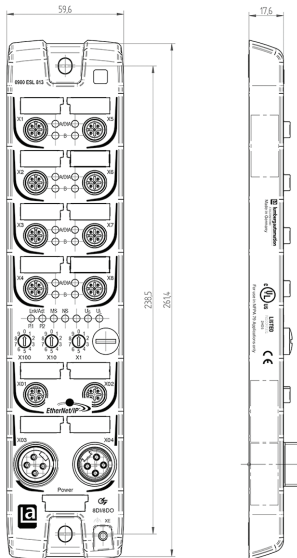

| | | |
|-----------------------|--|--|
| Type | 0980 ESL 811-EIP 16DI-M12-R | |
| Product Description | LioN-R Digital input module, 16 digital input channels, EtherNet/IP devices, rotary address switches for setting addresses, M12 LAN connector, D-coded | |
| Order Number | 934 691-001 | |
| Diagnostic indication | | |
| LED | Indication | Condition |
| 1...8 A | White | Channel status |
| 1...8 DIA A | Red | Periphery error |
| 1... 8 B | White | Channel status |
| 1... 8 DIA B | Red | Periphery error |
| P1 Lnk/Act | Green Yellow flashing Off | Connection to an Ethernet device I/O device exchanging data No connection to any other device |
| P2 Lnk/Act | Green Green flashing Off | Connection to an Ethernet device I/O device exchanging data No connection to any other devices |
| MS (Module status) | Green Green flashing Red/Green flashing Red flashing Off | Device is ready for operating Wrong configuration Self test is running Firmware update Device is switches off |
| NS (Network status) | Green flashing Green Red flashing Red Red/Green flashing Off | IP address is available Connection to master is available At least one connection has timed out IP address is already being used by another device Self test is running Device is switched off/Device has no IP address |
| US | Green Red | Voltage 18 V<= US<=30V Voltage US<18V or US>30V |
| UL | Green Red | Voltage 18 V<= US<=30V Voltage US<18V or US>30V |

Technical modifications reserved.


| Bit assignment | | | | | | | | |
|----------------|----|----|----|----|----|----|----|----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| M12 Input 16DI | | | | | | | | |
| Byte 0 | 4B | 4A | 3B | 3A | 2B | 2A | 1B | 1A |
| Byte 1 | 8B | 8A | 7B | 7A | 6B | 6A | 5B | 5A |

| Pin assignment | | |
|---|---|---|
| LAN connection M12, D-coded | Power supply 7/8" | Input/Output M12 |
| <p>1 = TD+ 2 = RD+ 3 = TD- 4 = RD Housing = shielding</p> | <p>1 = +24V Actuators 2 = +24V Logic/Sensor 3 = GND (0V) Logic/Sensor 4 = GND (0V) Actuators Housing = PE</p> | <p>1 = +24V 2 = IN B 3 = GND (0V) 4 = IN A 5 = earth Housing = PE</p> |

| Part number | Order number |
|-----------------------------|--------------|
| 0980 ESL 811-EIP 16DI-M12-R | 934 691-001 |



LioN-R EtherNet/IP I/O Rugged Modules with 16 Digital Inputs

| Product Description | |
|---|-----------------------------|
| Type | 0980 ESL 811-EIP 16DI-M12-R |
|  | |
| Technical Data | |
| Protection Class | IP67 |
| Operating Temperature Range | -10° C to +60° C |
| Weight | 605 g |
| Housing Material | Metal (diecast zinc) |
| Bus System | |
| Transmission Rate | 10/100 Mbs |
| Address Range | 0 to 255 |
| Default Address | 0 |
| Inputs | |
| Rated Input Voltage | 24V DC |
| Sensor Type | PNP (source) |
| Power Consumption of Sensor | Max. 200 mA |
| Reverse Polarity Protection | Yes |
| Short Circuit-proof | Yes |
| Number of Digital Channels | 16 |
| Status Indicator | LED white per channel |
| Diagnostic Indicator | LED red per port |
| Included in Delivery | |
| M12 Dust Covers | 4 pieces |
| Attachable Labels | 10 pieces |

The use of these products in aggressive media should be verified in each case. Technical modifications reserved.
 Certifications have been applied for UL and CSA.