

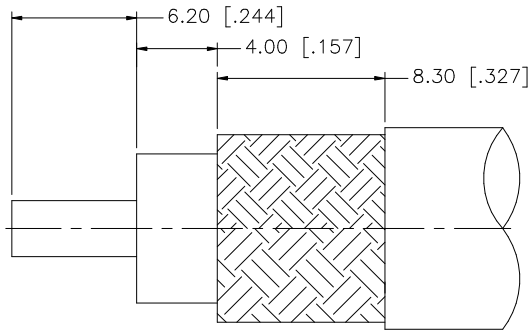
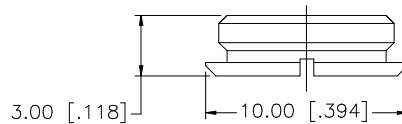


REV.	DATE	DESCRIPTION
NC	02/27/01	INITIAL RELEASE
A	03/12/07	UPDATE DRAWING FORMAT

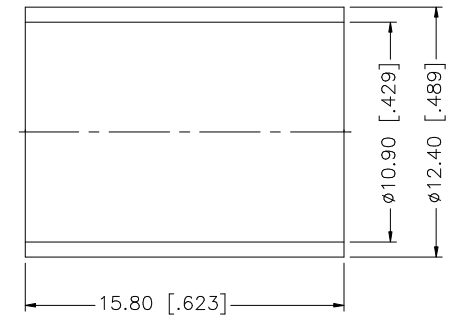

RECOMMENDED
CABLE STRIPPING DIM'S

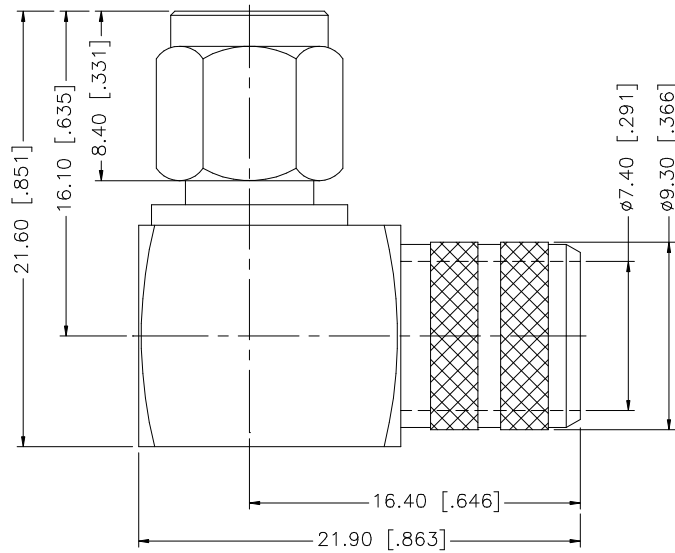

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex								
7						DRAWN	G.R.S.						03/12/07			
6						CHECKED										
5	FERRULE	COPPER	GOLD	1					PART DESCRIPTION							
4	COVER	BRASS	GOLD	1					SMA R/A CRIMP PLUG							
3	CONTACT PIN	BRASS	GOLD	1				(FOR BELDEN 9913, 9914, TIME U/R–400 CABLE)								
2	INSULATOR	TEFLON	NATURAL	1				PART NO.								
1	BODY	BRASS	GOLD	1				132299								
	DESCRIPTION	MATERIAL	FINISH	QTY				DWG. NO.		132299.DWG	REV.	A	SIZE	A	SCALE	NA
					DO NOT SCALE DRAWING		CAD FILE		C:/132/132299.DWG							