

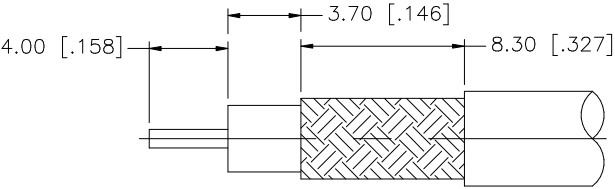
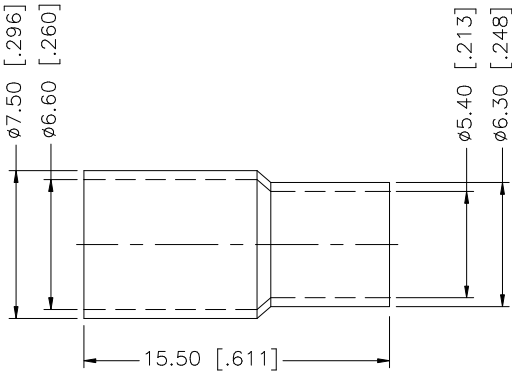


REV.	DATE	DESCRIPTION
NC	07/09/02	INITIAL RELEASE
A	10/02/06	REVISE CRIMP NOTE 1, UPDATE DRAWING FORMAT

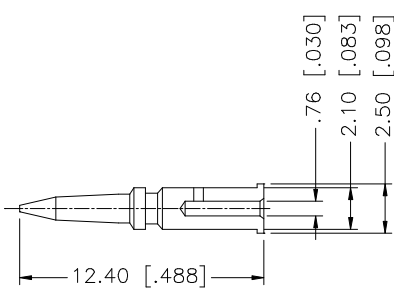

RECOMMENDED CABLE
STRIPPING DIM'S

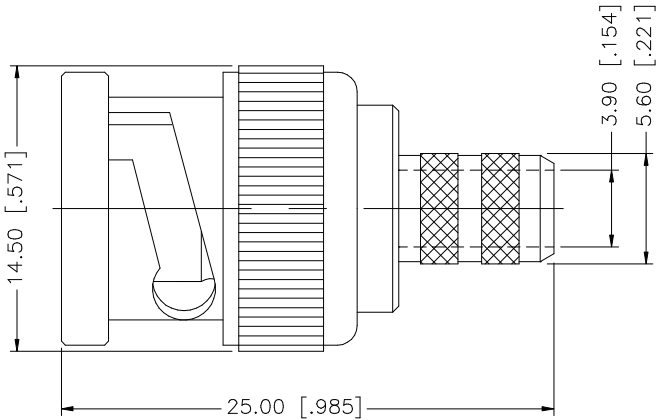

CRIMP NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
7						DRAWN	G.R.S.	10/02/06							
6						CHECKED			PART DESCRIPTION BNC CRIMP PLUG (FOR RG-59/U PLENUM)						
5						ISSUED									
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1			PART NO. 112127					
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE			C:/112/112127.DWG							
2	INSULATOR	TEFLON	NATURAL	1	DWG. NO.			112127.DWG		REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											