
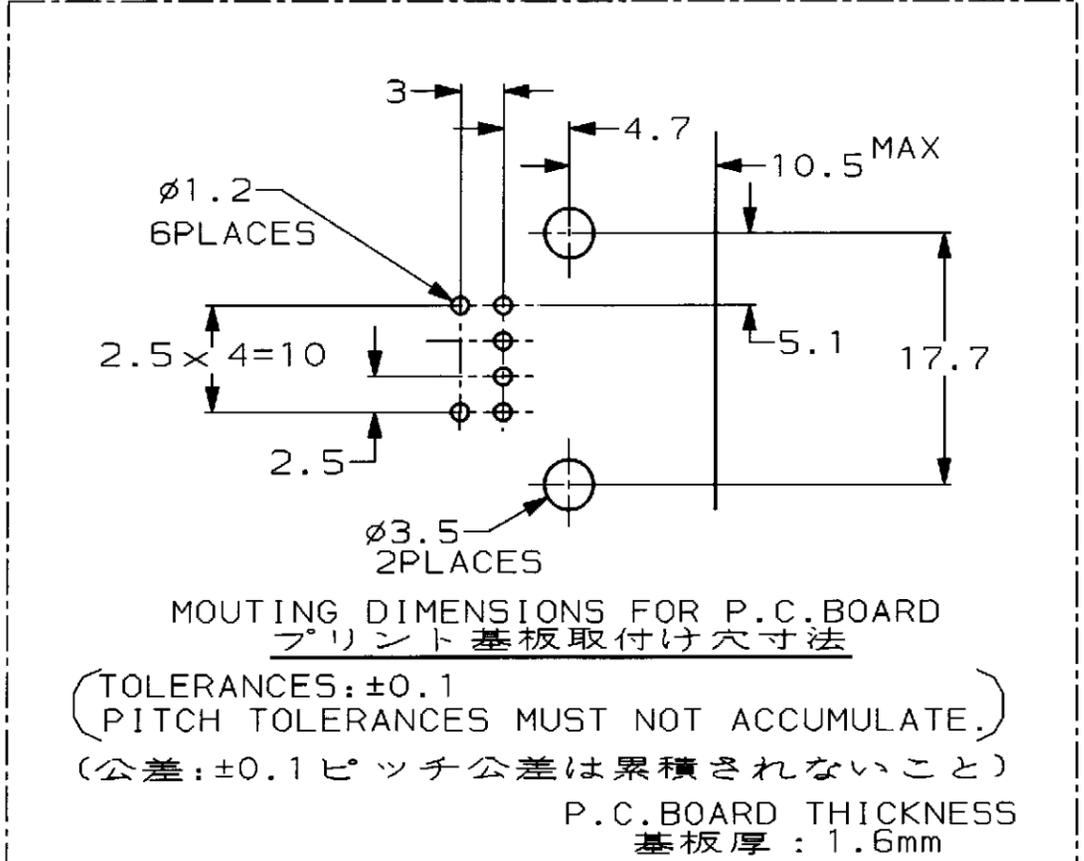
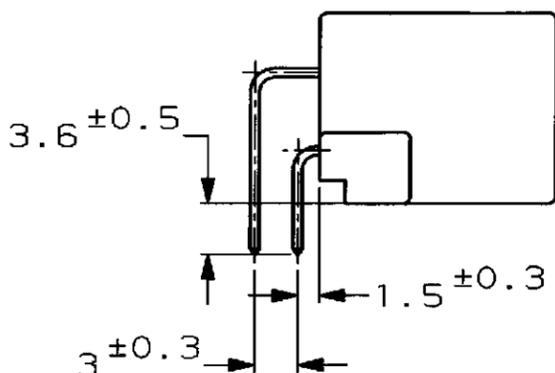
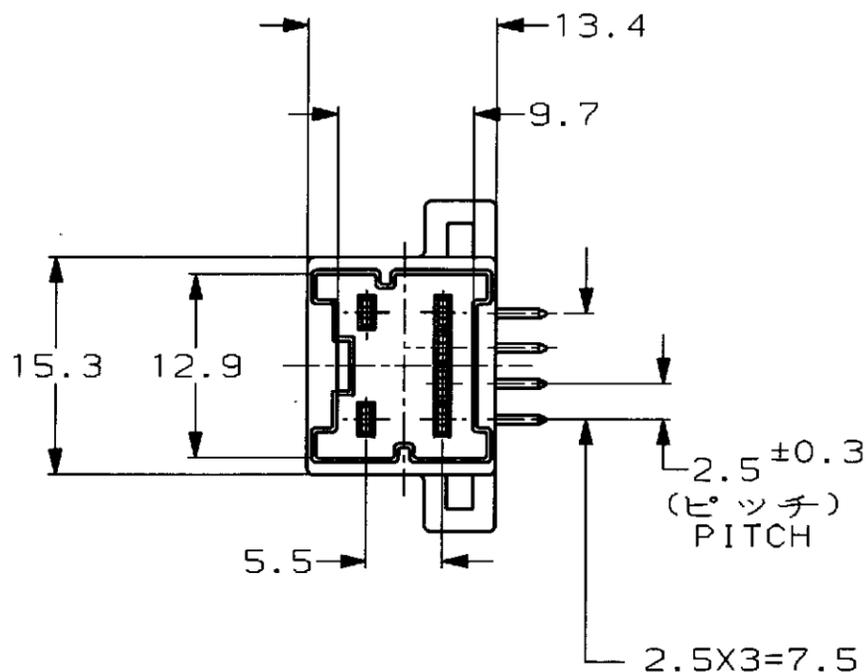


P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
	A	再作成 REDRAWN	FJ00-0506-98	28 APR 98		

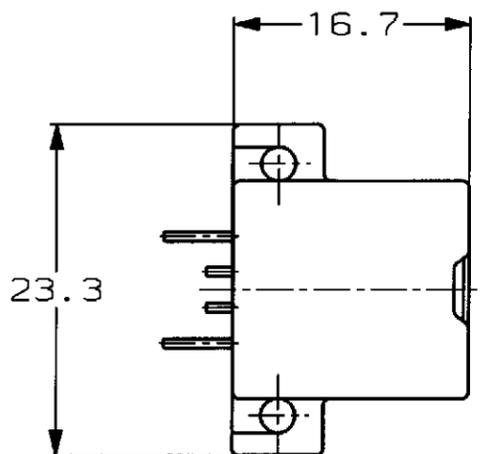

- 1 RECOMMENDED MOUNTING SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW OF 3 DIA X 6 LENGTH (JIS B1115, B1122), TIGHTENING TORQUE: 39.2Nm [4Kg-cm] MAX
- 1 推奨取付ネジ: JIS B1115, B1122タッピングねじ, なべ2種, 呼び径3, 長さ6, 締付トルク: 39.2N-cm [4Kg-cm] 以下

自然色 (NATURAL)	1123619-1
色 (COLOR)	型番 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN: <i>E. Minota</i> 28 APR 98 CHK: <i>E. Sasaki</i> 28 APR 98 APVD: <i>[Signature]</i> 28 APR 98		AMP 日本エー・エム・ピー株式会社 Kawasaki, Japan	
DIMENSIONS: 単位: 概 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT SPEC 108-5603	NAME 040III MULTILOCK CONNECTOR 6POS CAP HOUSING ASSEMBLY WIRE TO BOARD (H) TYPE	040III マルチロック コネクタ 6極 水平型 キャップハウジング アッセンブリ (対基板用)	
	一般公差 10% ±0.2 30% ±0.25 50% ±0.3 100% ±0.3 ANGLE: ±0.3°	APPLICATION SPEC 取付通用規格	SIZE A3	CAGE CODE 00779	DRAWING NO. 1123619
MATERIAL 材料 PBT	FINISH 仕上	WEIGHT 2.2g	CUSTOMER DRAWING		RESTRICTED TO -
			SCALE 尺度 2:1	SHEET 1 OF 1	REV A