




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. 1.5mm NOMINAL INSULATION CRIMP HEIGHT.
5. CRIMP DATA QUOTED ON THIS LOG IS AS SPECIFIED BY CUSTOMER AND NOT AS CALCULATED BY AMP.

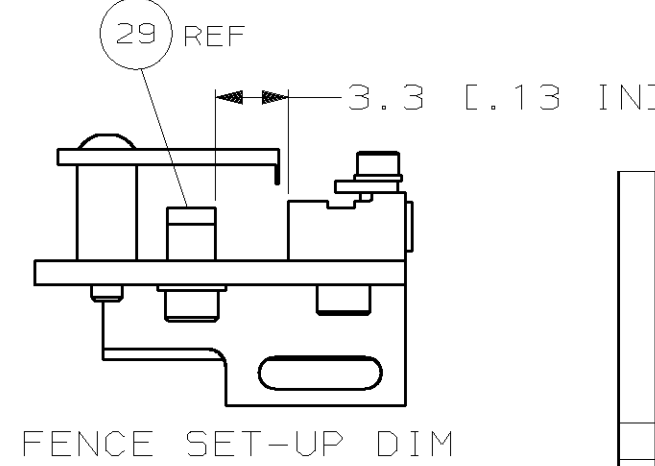

FENCE SET-UP DIM

CNR MC APP	JUL03 NOV00 DATE	DIMENSIONS: mm [INCHES]	MATL	-	HT TR	-	FIN	-
		DO NOT SCALE PRINT.						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:	DR	195EPOO	APP	195EPOO		
		1 PLC DEC $\pm$ 0.5 [0.2 IN]	M. CLIFFORD		F. BACKHURST			
		2 PLC DEC $\pm$	CHK	03-11-00	REL	03-11-00		
		3 PLC DEC $\pm$		L. LOPTHOUSE		M. CLIFFORD		
		ANQLES $\pm$	NAME	SIDE FEED HD-1 APPLICATOR				MACHINE REF
		SURF TEXTURE: $\checkmark$	SCALE	-	DWG NO	1426090	SHEET	REV
		REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX					1 OF 1	B
		CAGE CODE 00779	CUSTOMER AND ASSEMBLY DRAWING					RESTRICTED TO -