


RF TERMINATION Type 6530.17.0001

Description

Low PIM Termination, Medium Power

PIM optimised

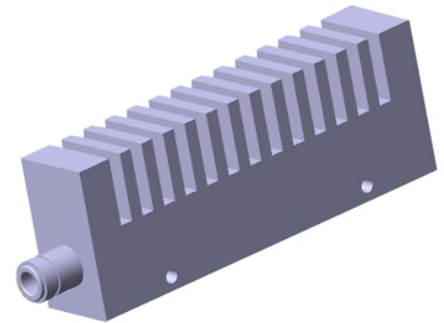

Product Configuration

Connector	N jack (female)
Interface standards	IEC 60169-16_MIL-STD-348A/304_CECC 22210

Technical Data

Electrical Data

Nominal Impedance	50 Ω
Frequency range	0.698 to 2.7 GHz
Power rating	30 Watt average power up to 55 °C ambient temperature, linearly derated to Watt at °C ambient temperature. 5000 Watt peak power
3rd order intermodulation max.	Static -160 dBc at 2x 43 dBm / 2x 20 W carrier

Mechanical Data

Weight	0.66 kg
--------	---------

Environmental Data

Operating temperature	-35 °C to 55 °C
2011/65/EC (RoHS)	compliant

Material Data

Piece Part	Material	Surface Plating
Centre contact	Bronze	Tri-metal Plating
Outer contact	Brass	Tri-metal Plating
Body	Aluminium	Black
Insulator	PFA / PTFE	

Related Documents

Outline drawing	DOU-00289400
-----------------	--------------

Ordering Information

Single Packaging	6530.17.0001
Packaging	

Additional Information

Remarks

PIM: typ. < -165 dBc
VSWR: typ. 1.10 : 1
Surface temperatur: +75 °C max. at 25 °C ambient temperatur
Mounting brackets included

RF TERMINATION Type 6530.17.0001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HUBER+SUHNER:](#)

[6530.17.0001](#)