


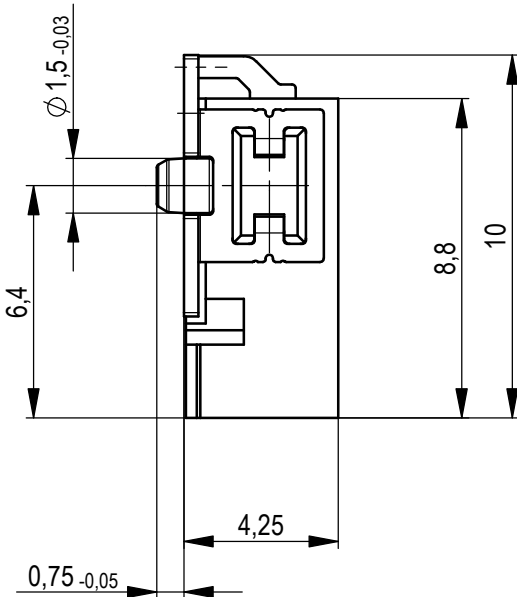
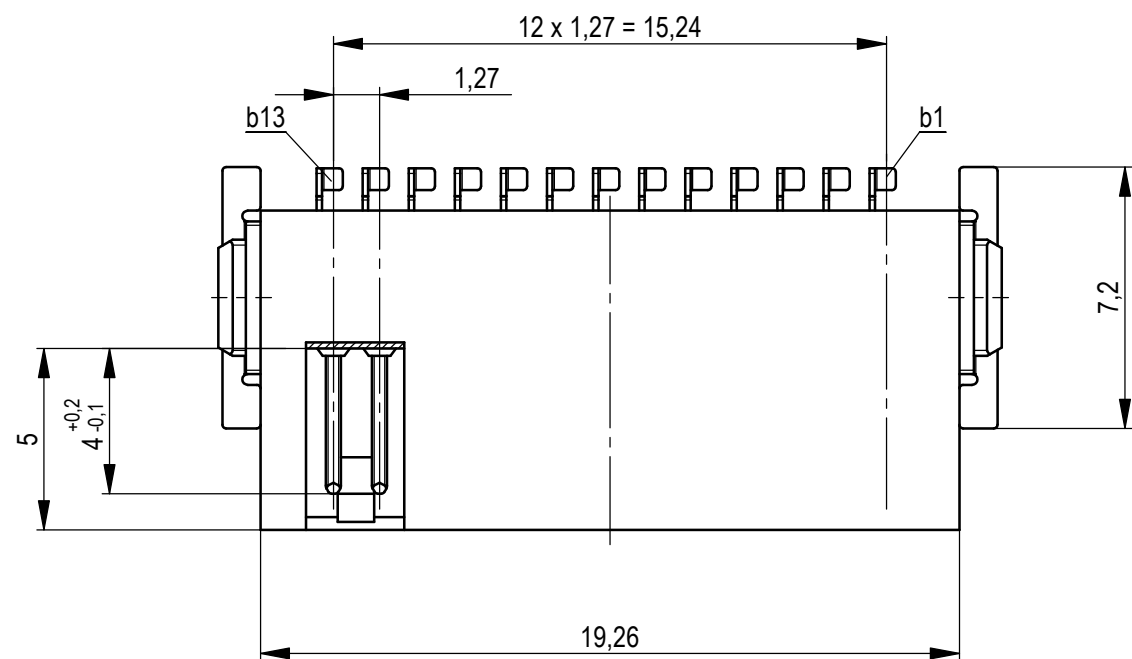
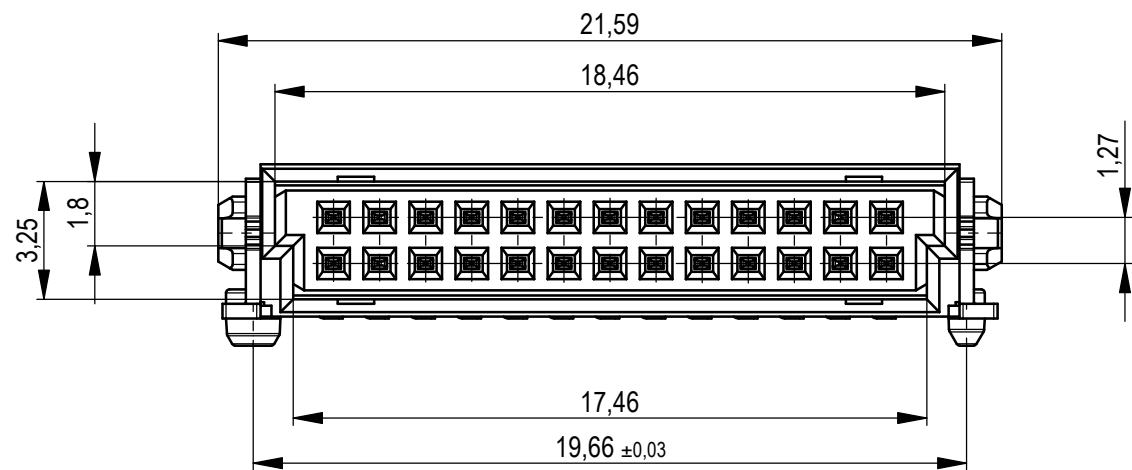


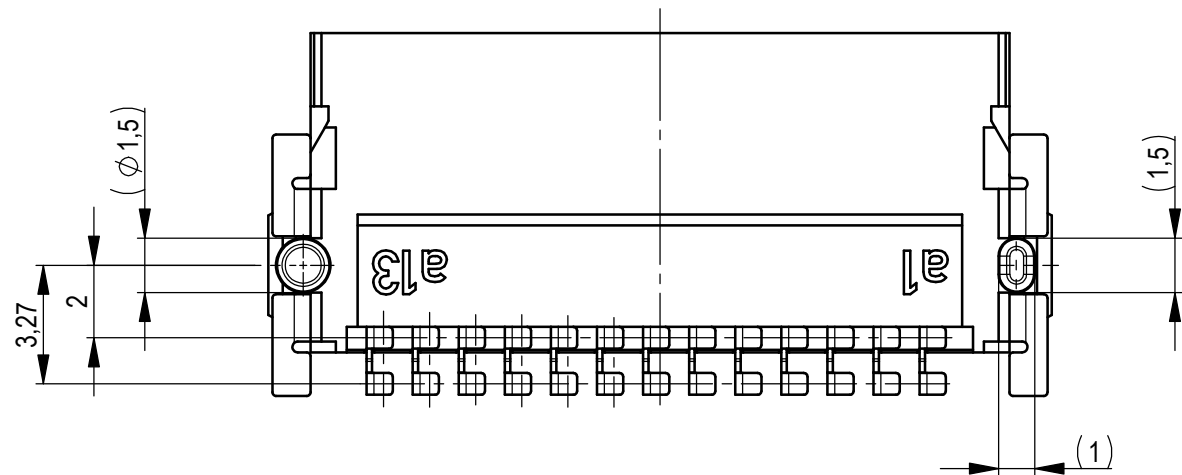


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 560 Stück
packaging unit: 560 pcs

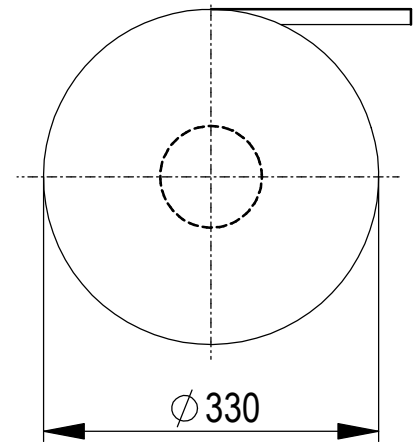

Abspulrichtung - reel off direction

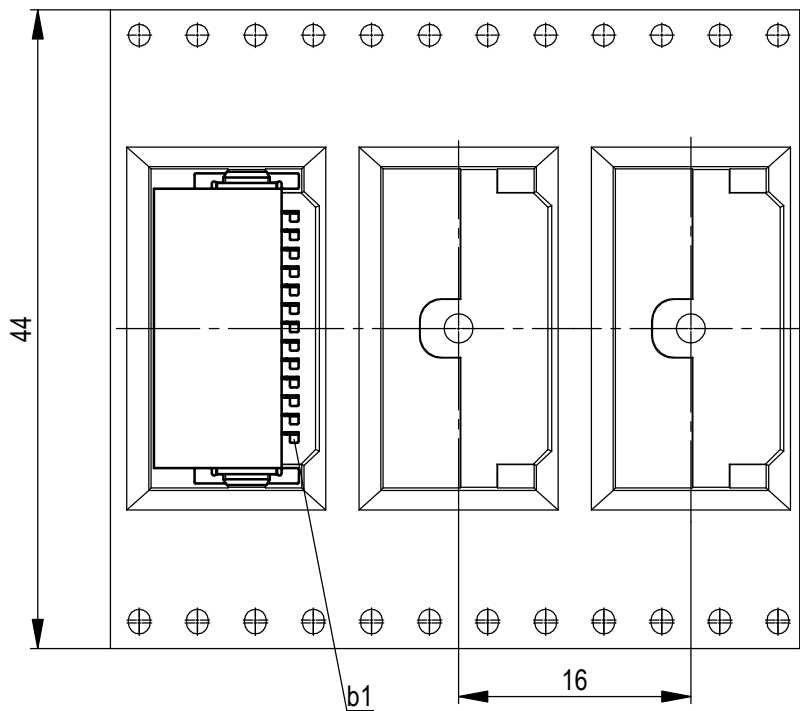

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

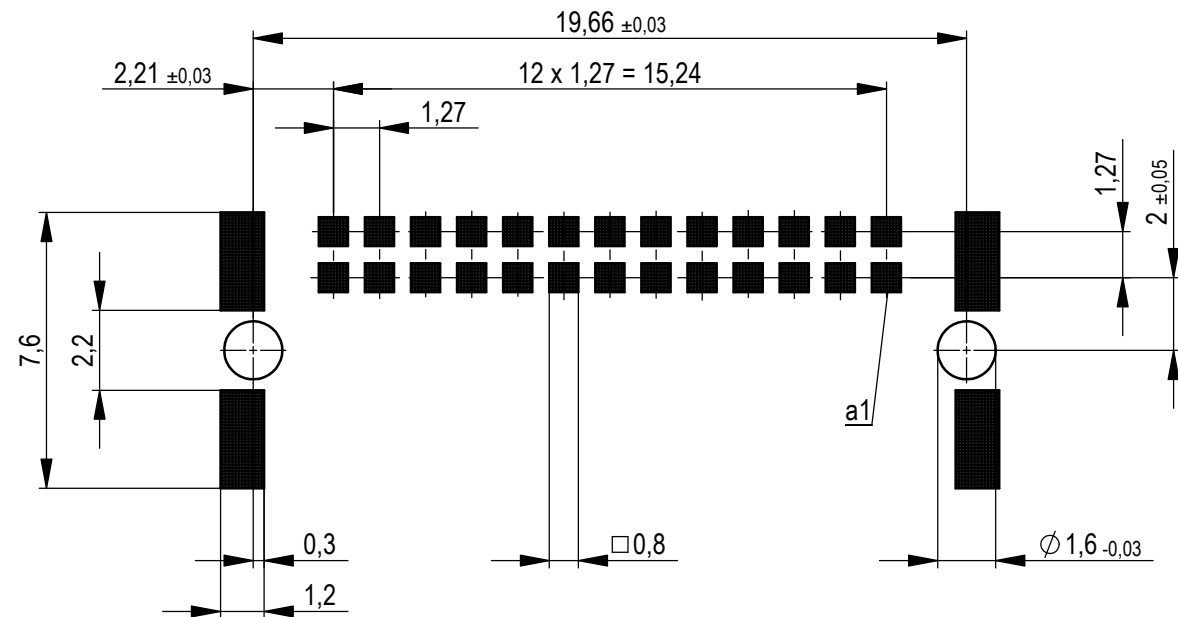

Anforderungsstufe 1
performance level 1
Kontaktbereich vergoldet
mating area gold plating
Anschlussbereich verzinkt 4-6 µm
terminal area 4-6 µm tin plating
Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

BA7-03 - Standard Bauhöhe
type7-03 - Standard Assembly Height

Dimension no.		Tolerances				Scale 5:1					
		ISO 8015		All Dimensions in mm		Material					
<u>Customer drawing:</u> All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Messerl. SMC-B 26-SMD-BA7-03 Male SMC-B 26-SMD-type7-03			
				ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland							
g		28.01.2020				154764		I			
Index		Date						A2			
				Class		SMCB					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[154764](#)