




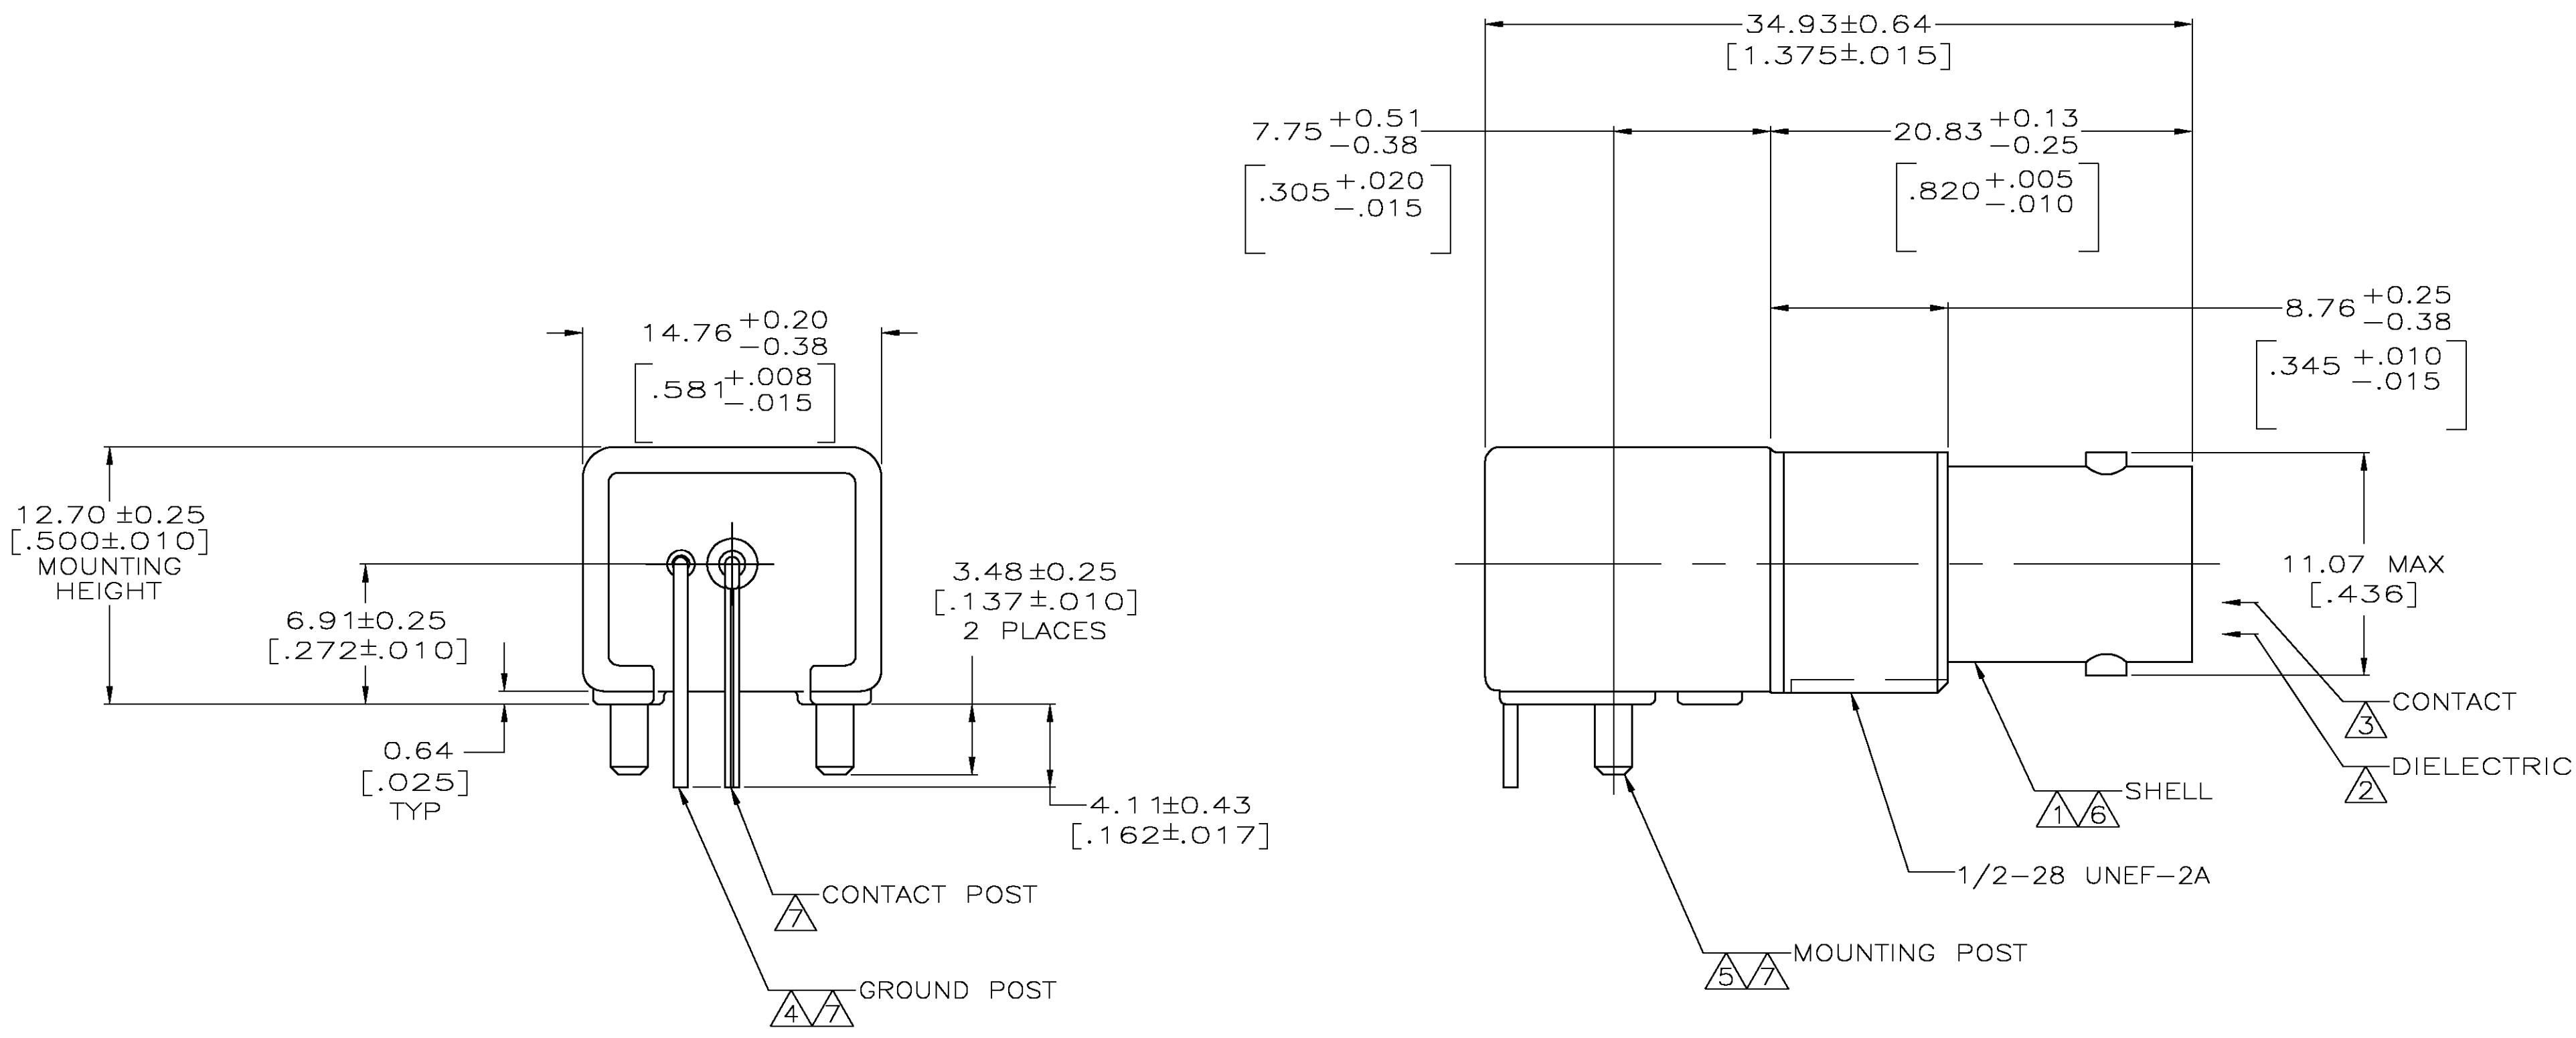

- 1 ZINC PER QQ-Z-363.
 - 2 POLYMETHYLPENTENE PER ASTM-D-1238.
 - 3 PHOSPHOR BRONZE PER QQ-B-750.
 - 4 BRASS PER ASTM-B-453.
 - 5 BRASS PER ASTM-B-16.
 - 6 NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
 - 7 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
 - 8 GOLD PLATE PER MIL-G-45204, 1.27 μm [.000050] MINIMUM THICK.
 - 9 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
10. SEE INSTRUCTION SHEET 2769.

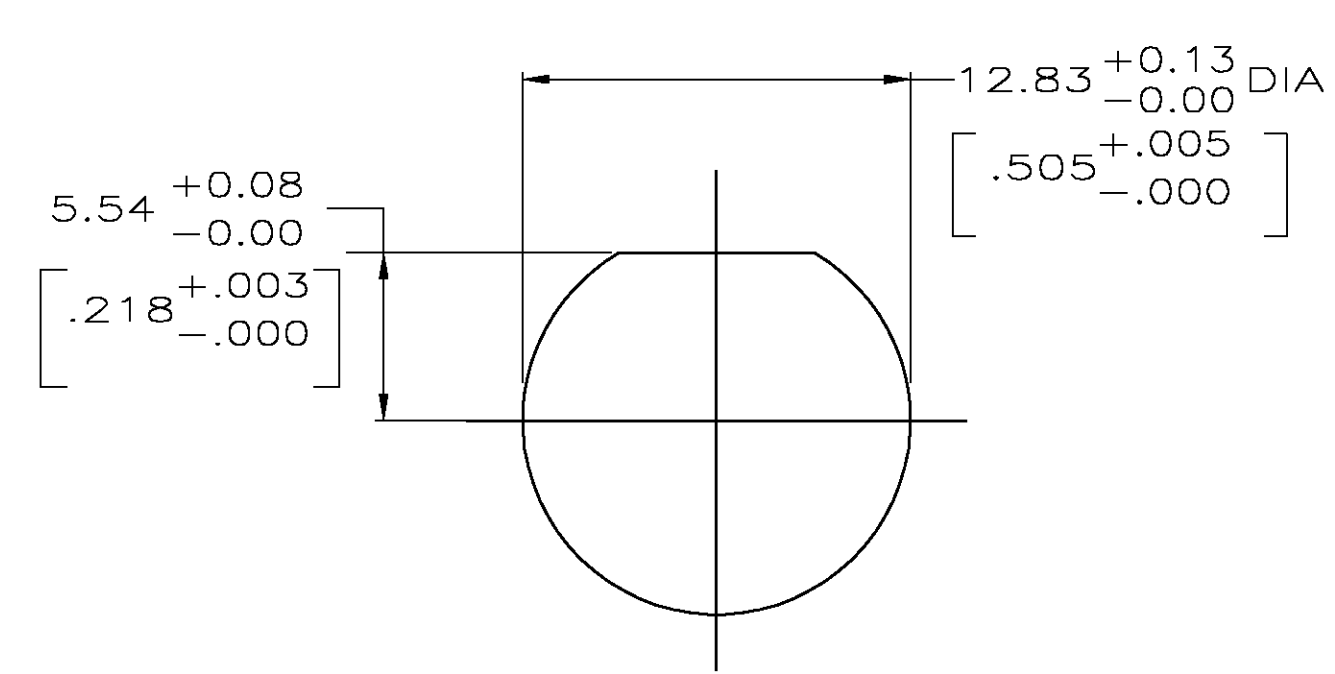

RECOMMENDED PANEL CUTOUT

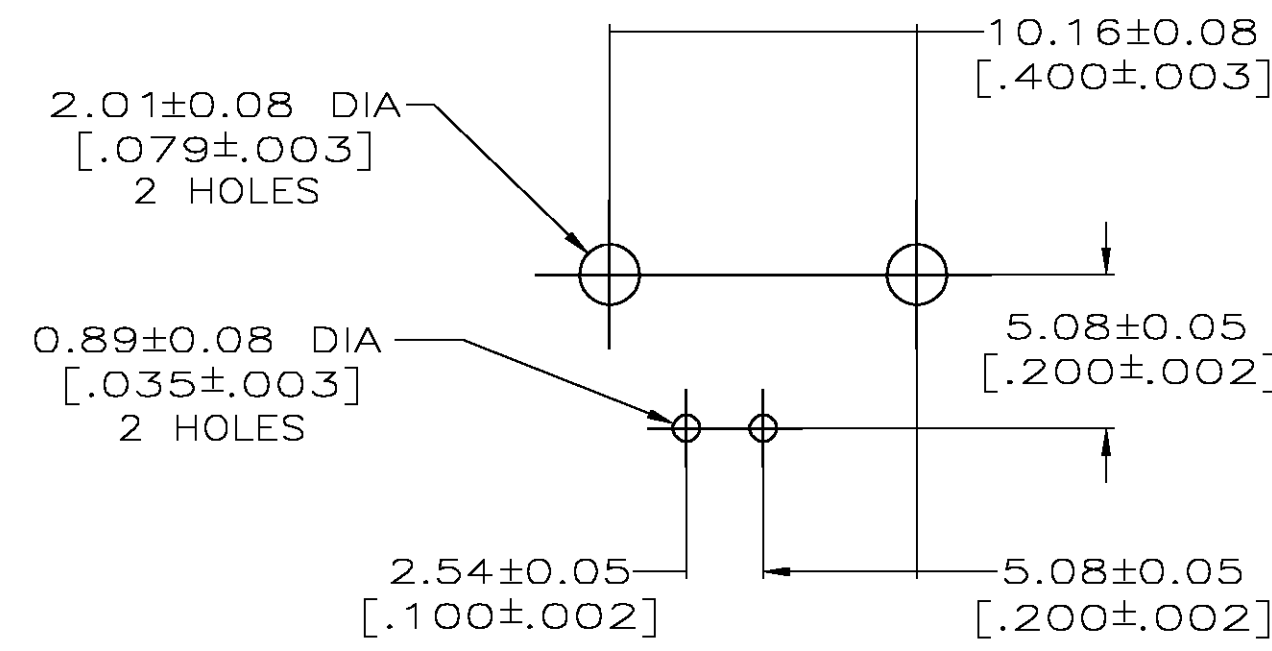

PCB CONFIGURATION

413879-2	
413879-1	
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

SEE NOTES 1-5

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	0.20 [.008]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH

SEE NOTES 6-9

DIN J. LIPPERT 6-23-92

CHK A. GABANY 6-25-92

APPROVED A. GABANY 6-25-92

PRODUCT SPEC 108-12078

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

Tyce Electronics Corporation
Middletown, PA 17057

NAME JACK, RIGHT ANGLE, PCB
50 OHM, SERIES BNC
-

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A1 00779 413879 -

SCALE 4:1 SHEET 1 OF 1 REV B