



5 Sealing Nut



4 Seals




3 Clamping Nut



2 Gasket






1 Nut




Recommended Panel Cut-Out

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-6A0003	2006/10/04	Rita	Change Cable Range
C	LEN-6C0042	2006/12/06	Jerry	Modify Note
D	LEN1570054	2015/06/01	Ruru	Change Logo

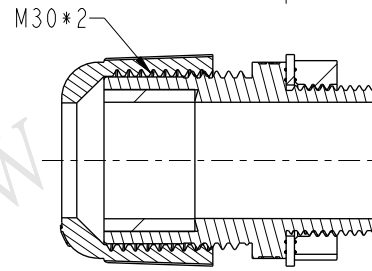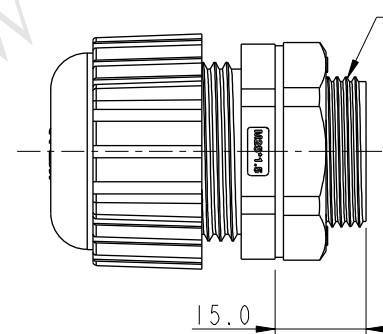


Section A-A

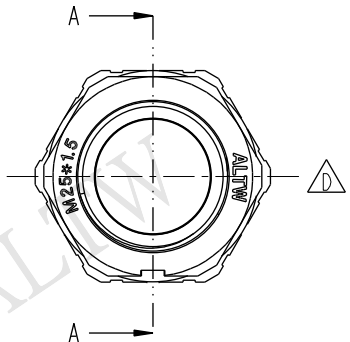

Note:

- * Waterproof Rate: IP68
- * Screw Nut: Nylon, Gray
- * Clamp Ring: Nylon, Gray
- * Sealing Nut: Nylon, Gray
- * Gasket: EPDM, Black
- * Seals: EPDM, Black
- * Panel Thickness: 6.2mm max
- * Cable Range: $\varnothing 18 \sim \varnothing 13 \text{mm}$
- * Spanner Size:
 - ① Screw Nut: 33mm
 - ③ Body: 32.5mm
 - ⑤ Sealing Nut: 35mm



UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		M25 Cable Gland Assy		CSG-25M001		Ruru		2015-06-01	
.XXX ±0.05		ANGLES ±1°		Gray For Long Type		CSG-25M001		Rita		2015-06-01	
SCALE 3:5		SIZE A4		SHEET 1 OF 1		CUSTOMER ALTW		Lion		2015-06-01	
REV. D		WC-REV. A.1		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.