


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
E	REV PER ECO	17-007041	5-16-17	CT	EO

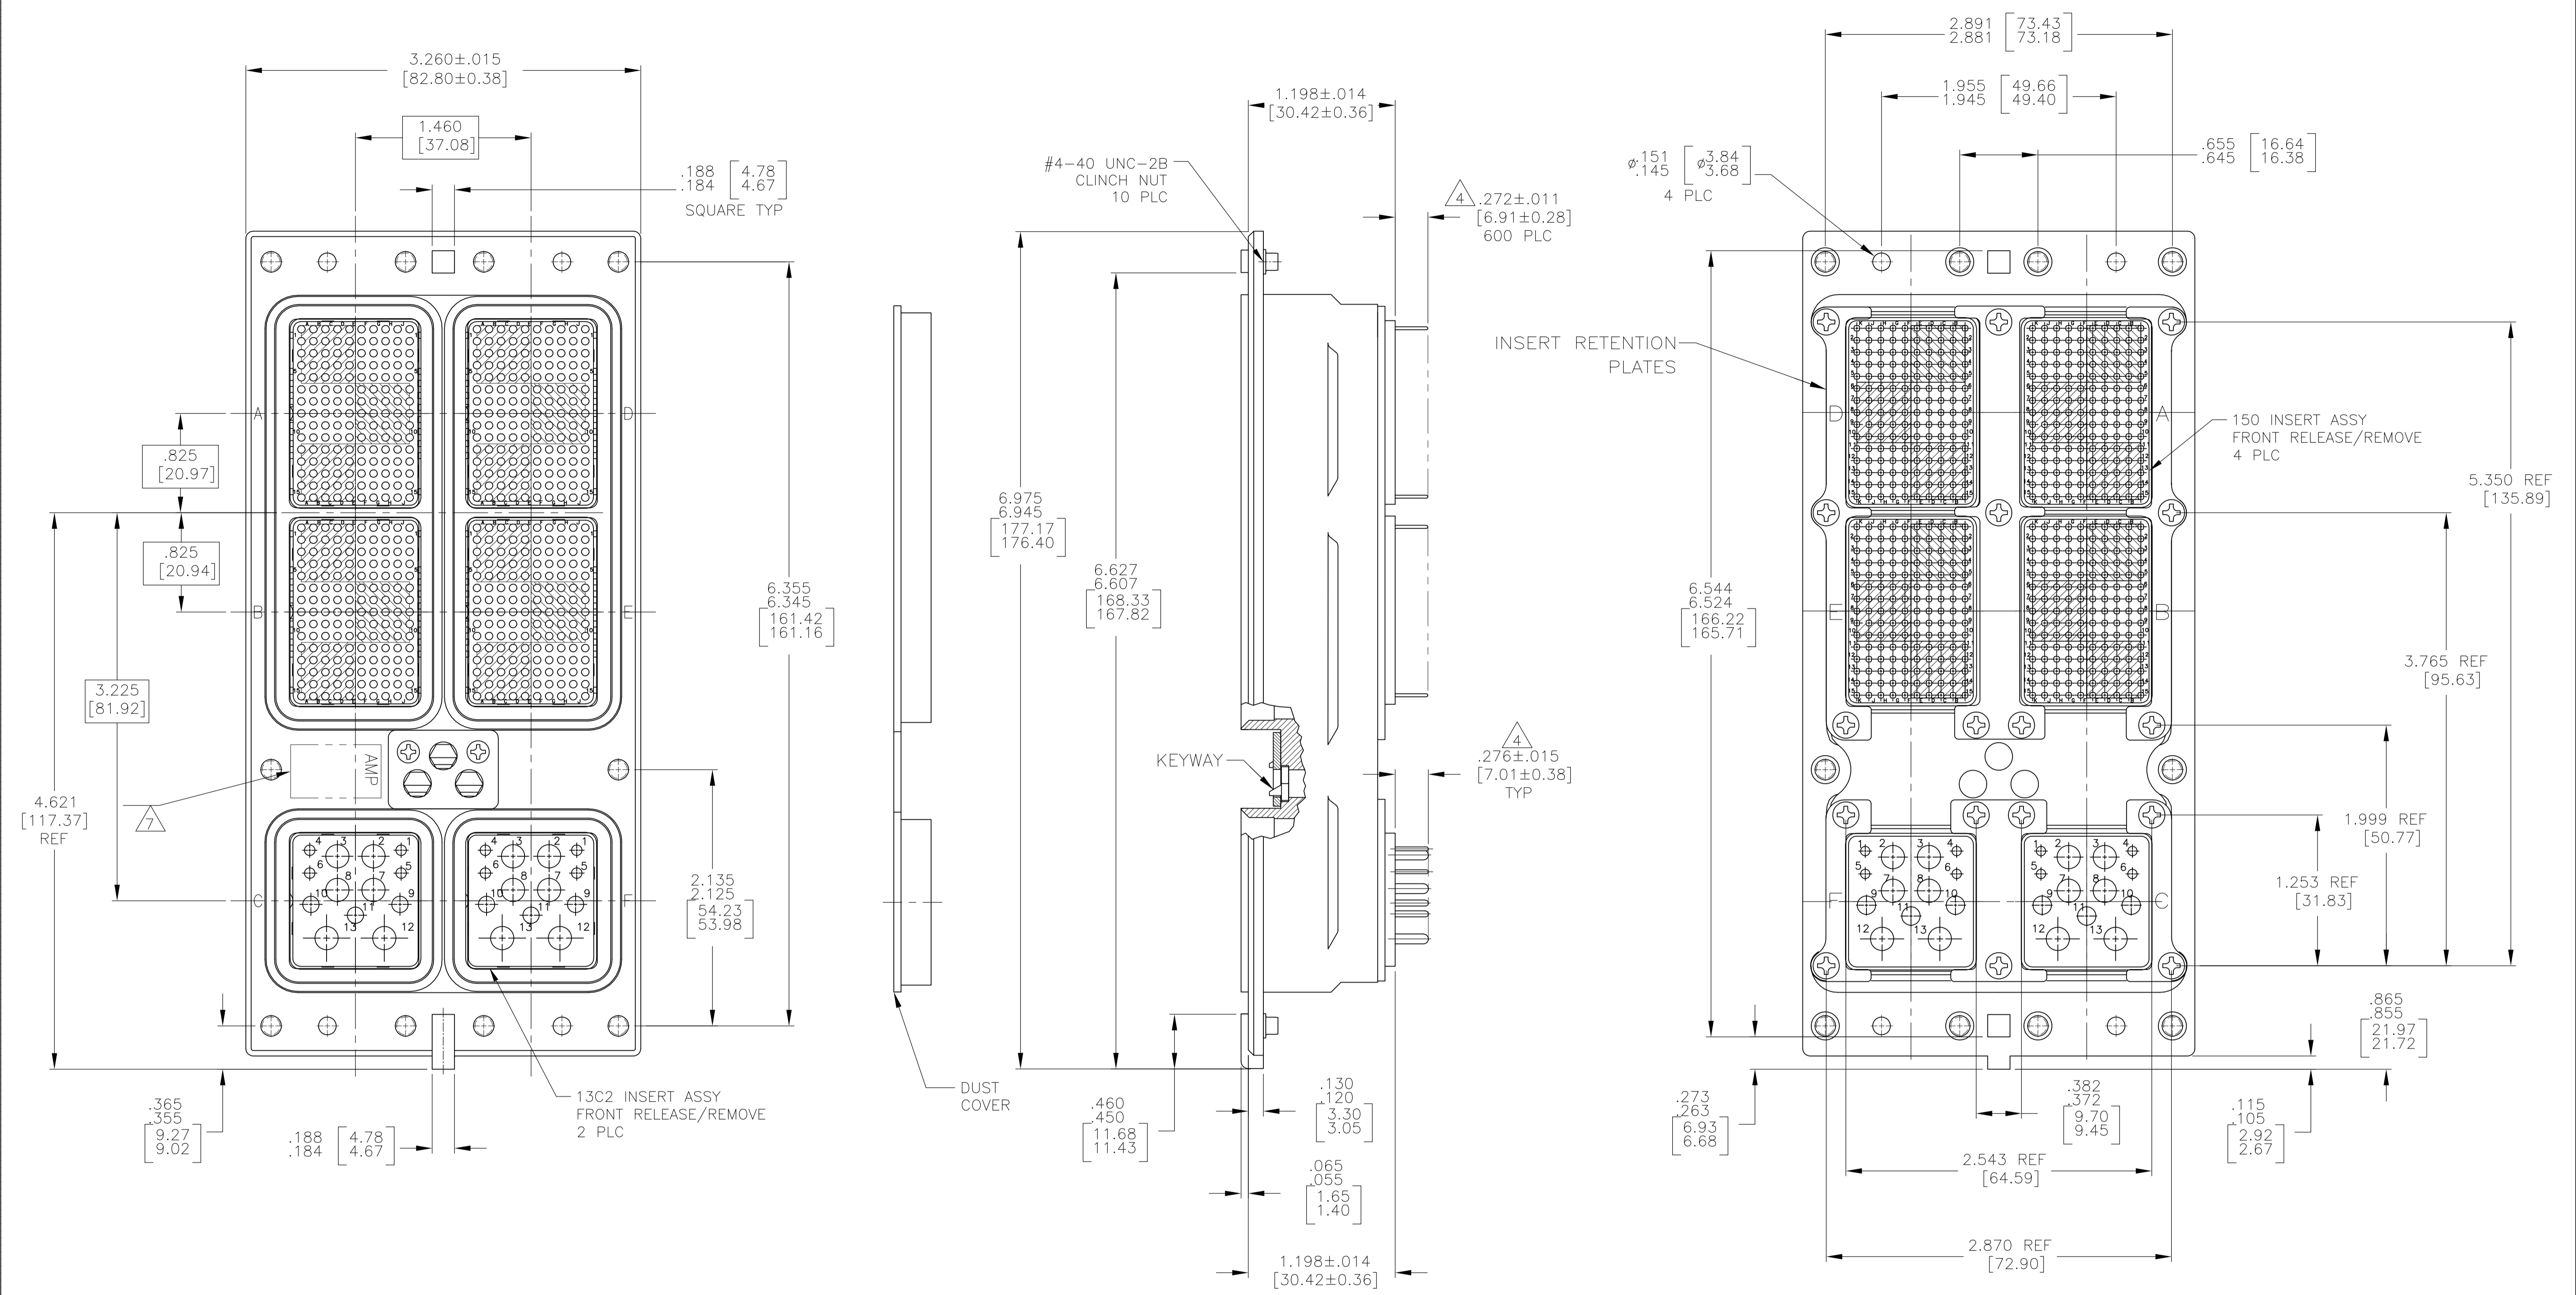

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- FOLLOWING CONTACTS AND FILLER PLUGS ARE LOADED:
 SIZE 22 SOCKET CONTACT (POSTED): TE P/N 211431-4; QTY: 600
 SIZE 12 PIN CONTACT (POSTED): TE P/N 1-448140-8; QTY: 12
 SIZE 16 PIN CONTACT (POSTED): TE P/N 1-448139-4; QTY: 6
 SIZE 20 PIN CONTACT (POSTED): TE P/N 1-448138-2; QTY: 8
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- WITH CONTACTS FULLY SEATED TO THE REAR OF INSERT.
- CONTACTS NOT SHOWN IN FRONT & REAR VIEWS FOR CLARITY.
- DUST COVERS ARE INSTALLED FOR SHIPPING.
- TE LOGO APPEARS IN THIS APPROXIMATE LOCATION ON MACHINED FROM BILLET SHELLS.
- ASSEMBLY SHOWN WITH DIE CAST SHELL. ASSEMBLIES WITH MACHINED SHELLS MAY VARY SLIGHTLY IN APPEARANCE.

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85 OR ASTM B211 6061-T6 OR ASTM B209 2024-T4	ELECTROLESS NICKEL PER MIL-C-26074 CLASS 4, GRADE B
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074 CLASS 4, GRADE B
FLATHEAD SCREWS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	-
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
ALL INSERTS	THERMOSET	-
FILLER PLUGS	TEFLON	-


"01"	2101252-1
KEYING POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DMN: C.C.THOMAS 6-2-09	APVD: K.THACKSTON 6-2-09
0 PLC ± .005	1 PLC ± .002	NAME: RCPT ASSY, SIZE 3, ARINC 600 (150/150/13C2/150/150/13C2)	RESTRICTED TO: -
2 PLC ± .001	3 PLC ± .0005	SIZE: A1	SCALE: 3:2
4 PLC ± .0002	ANGLES ± .0001	WEIGHT: 0	SHEET: 1 OF 2
MATERIAL: SEE TABLE	FINISH: SEE TABLE	CUSTOMER DRAWING	REV: E

TE Connectivity

REVISIONS				
P	LTR	DESCRIPTION	DATE	APPD
-	-	SEE SHEET 1	-	-

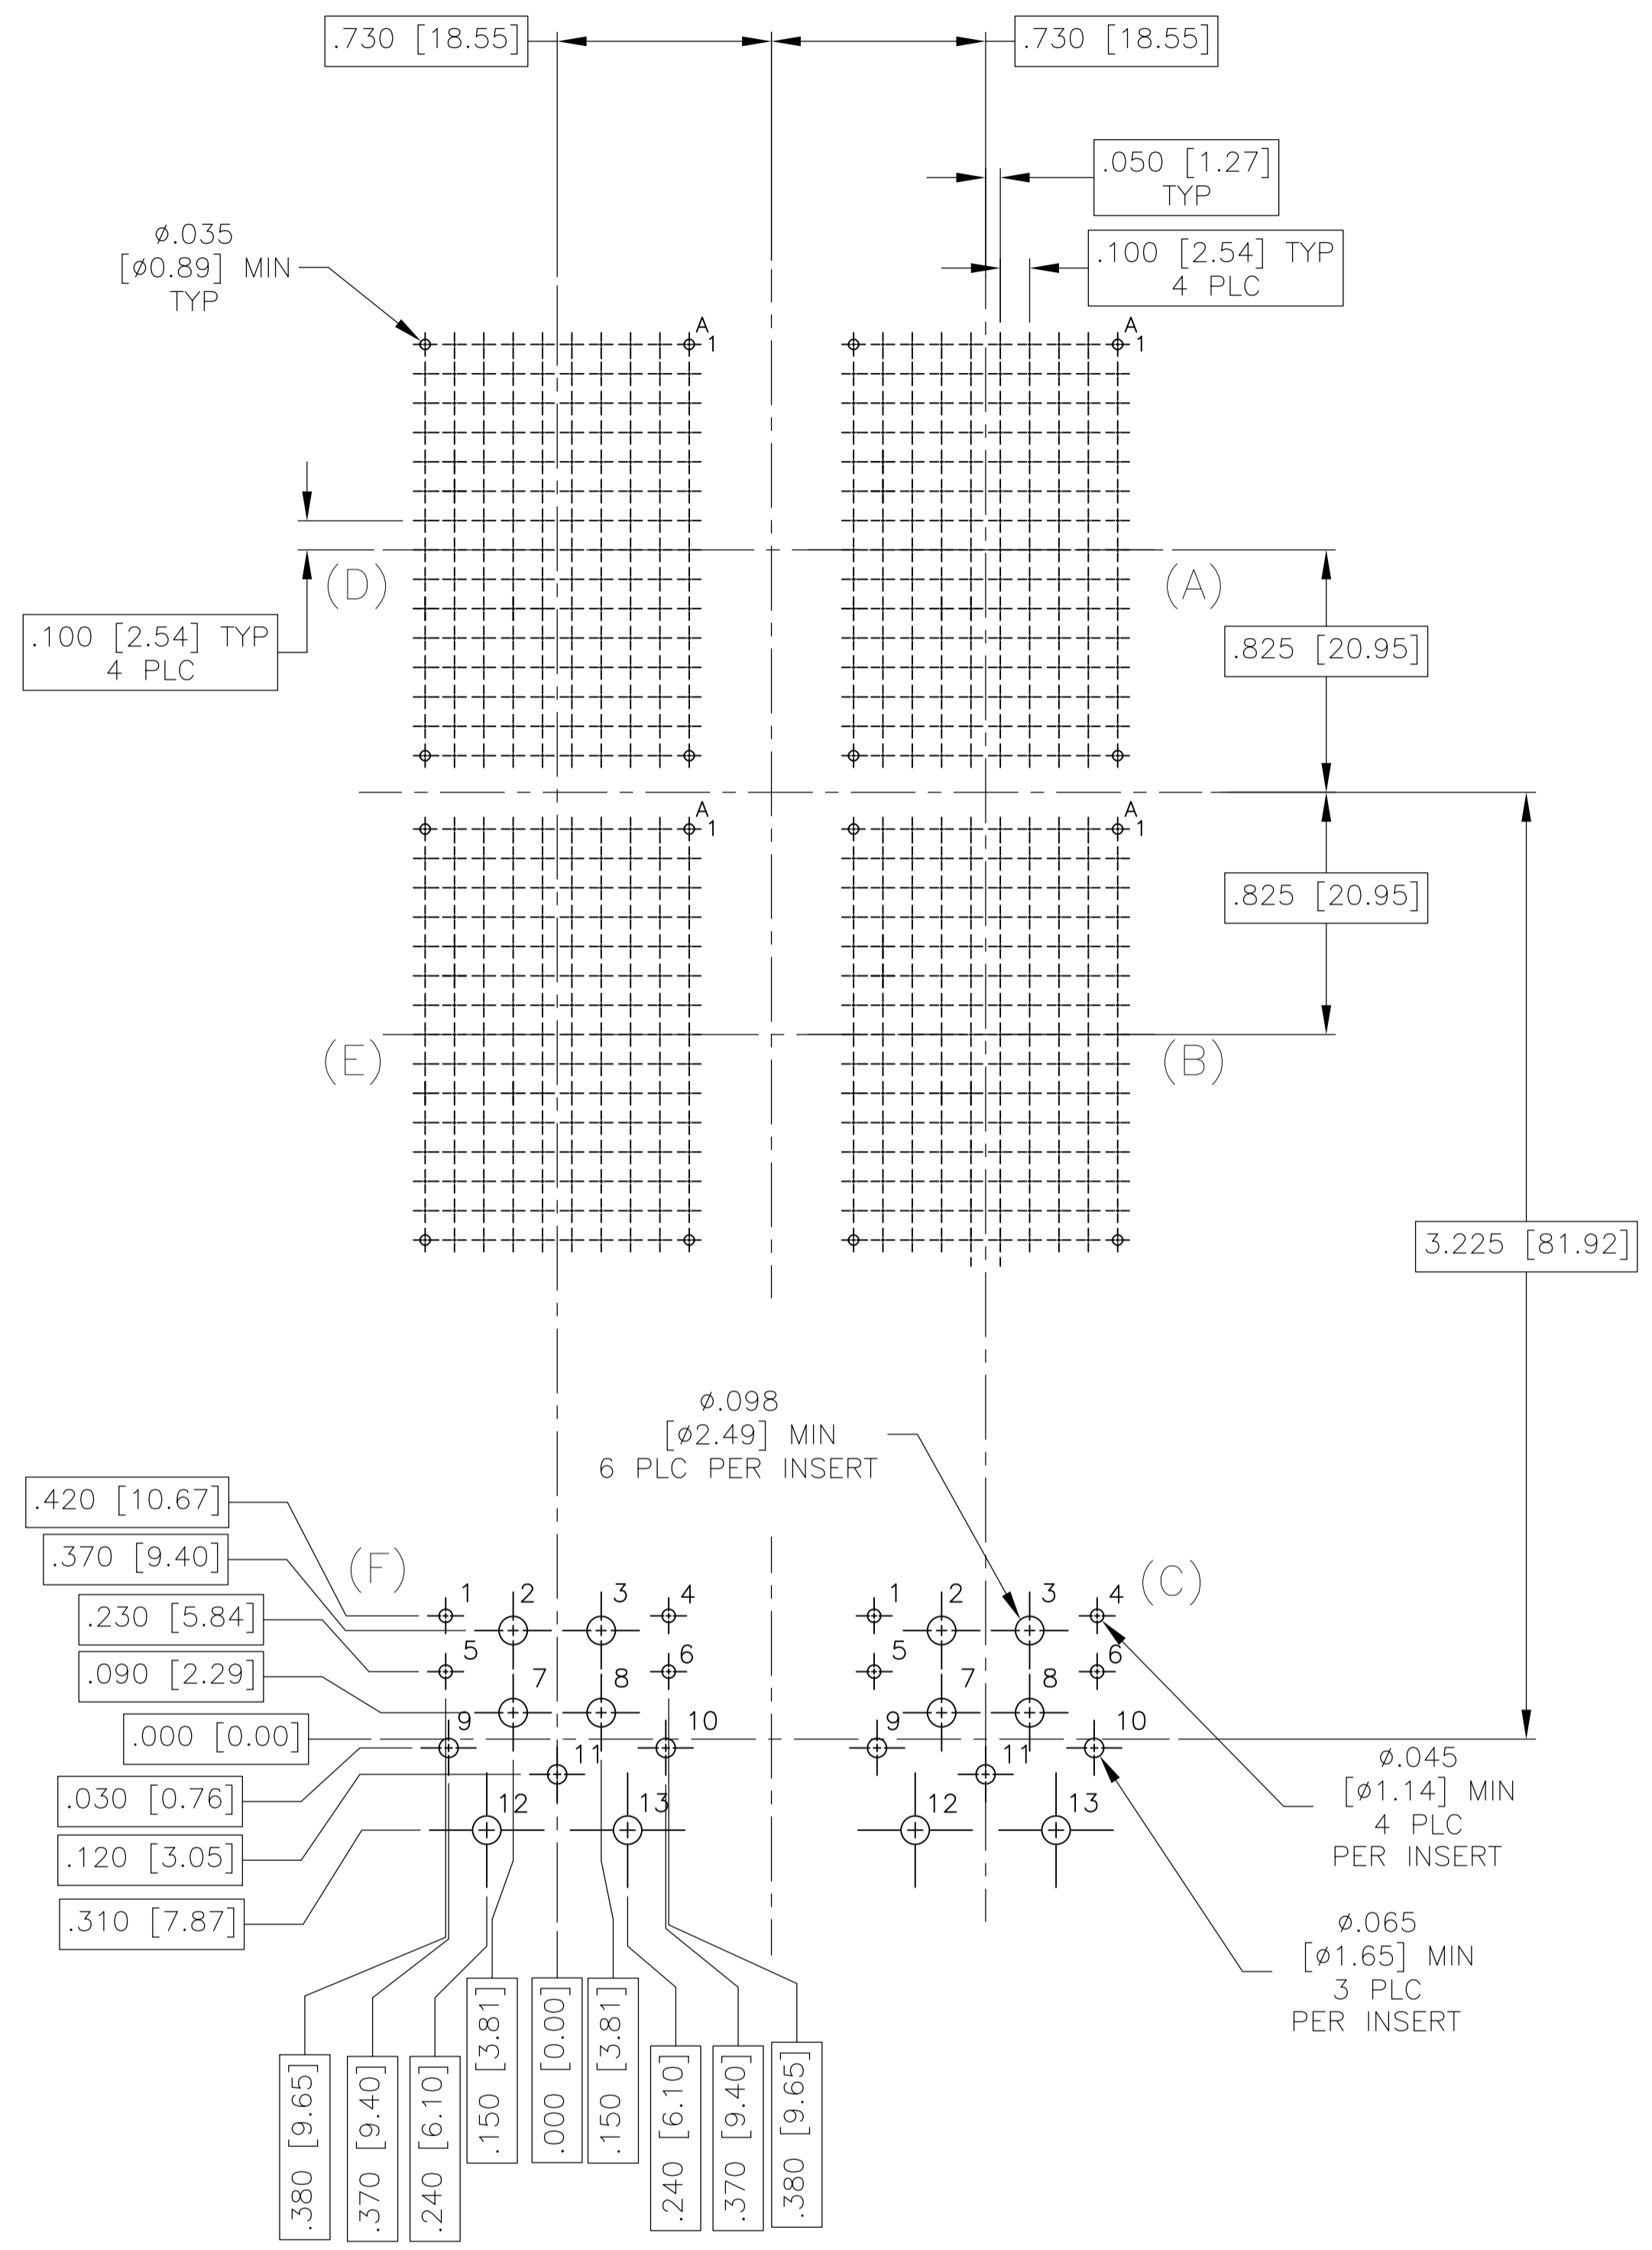

RECOMMENED P.C.BOARD LAYOUT
SCALE 2:1
(BACK VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C.C.THOMAS 6-2-09	TE Connectivity																		
DIMENSIONS: INCHES [mm]		CHK K.THACKSTON 6-2-09																			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD K.THACKSTON 6-2-09	NAME RCPT ASSY, SIZE 3, ARINC 600 (150/150/13C2/150/150/13C2)																		
<table border="1"> <tr> <td>0 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>1 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>2 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>3 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>4 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>ANGLES</td> <td>±</td> <td>-</td> </tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC	APPLICATION SPEC
0 PLC	±	-																			
1 PLC	±	-																			
2 PLC	±	-																			
3 PLC	±	-																			
4 PLC	±	-																			
ANGLES	±	-																			
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	SIZE A1																		
CUSTOMER DRAWING		SCALE 3:2	SHEET 2 OF 2																		
		DRAWING NO. 00779	REV E																		