

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	0	F		REVISED PER ECR-15-010337	23JUL2015	RK SC





1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- △

0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- △


0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- △

0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- △

0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

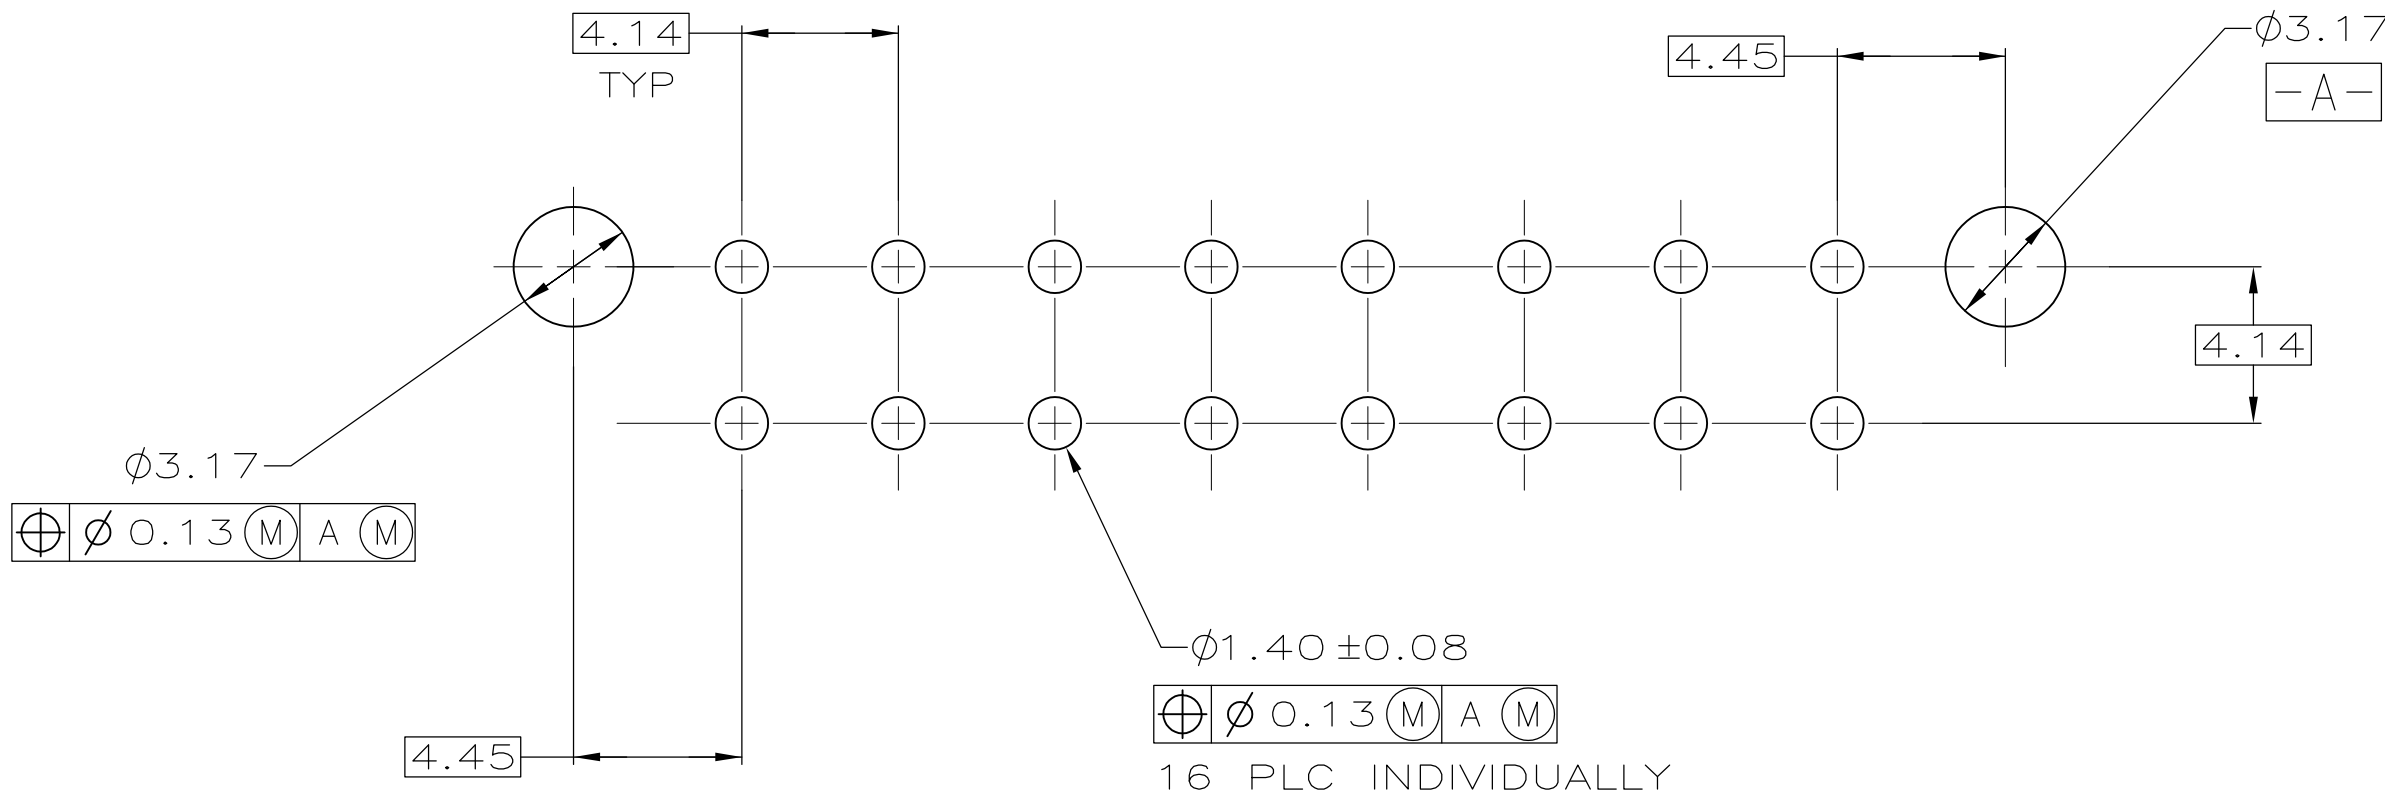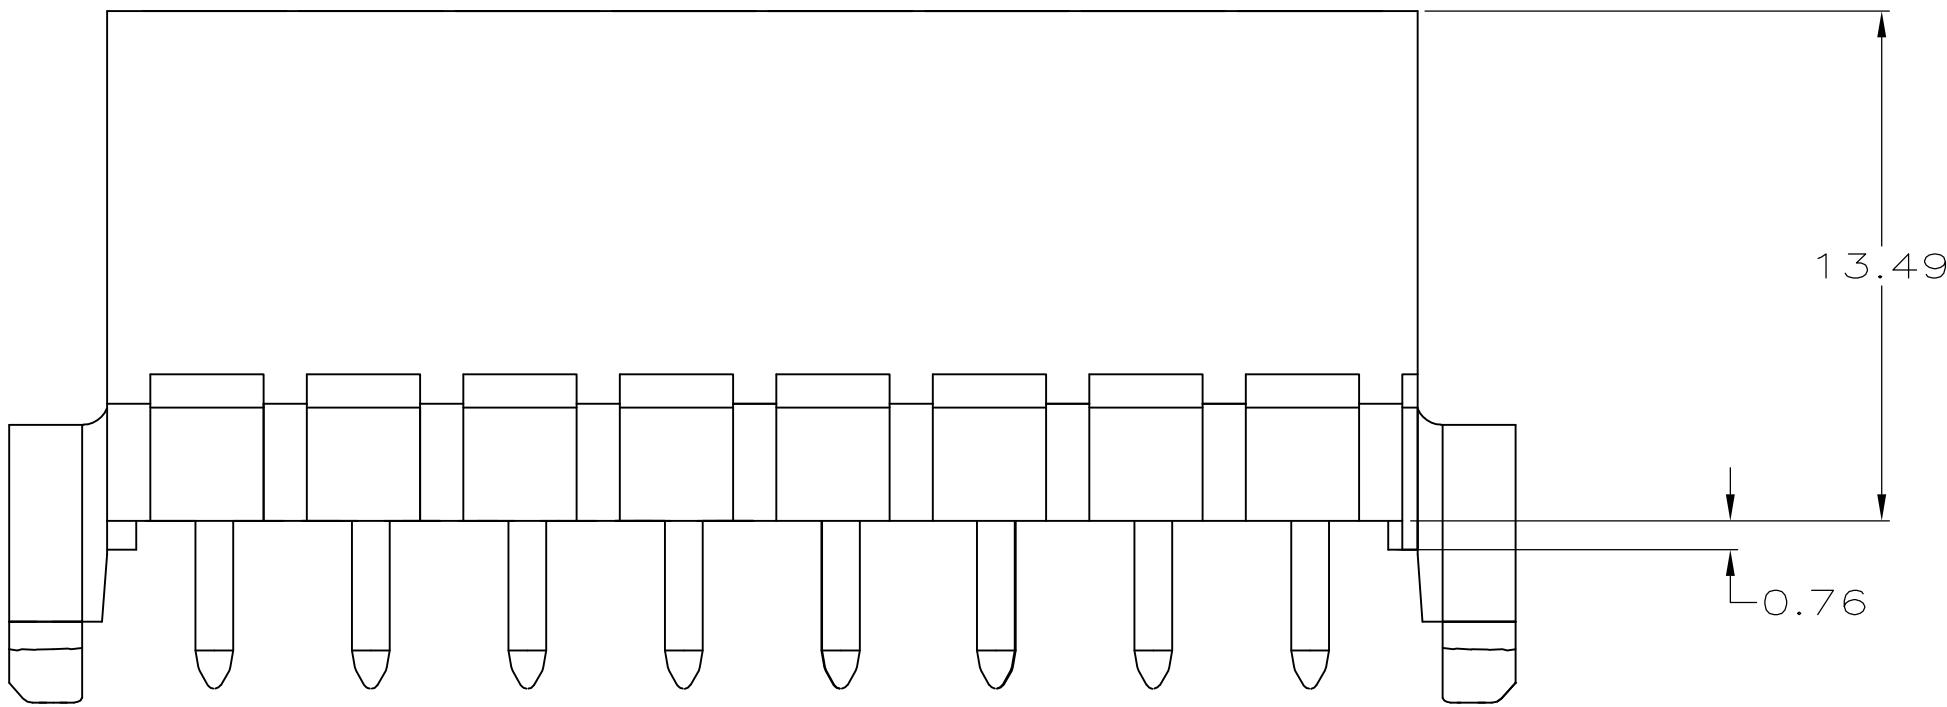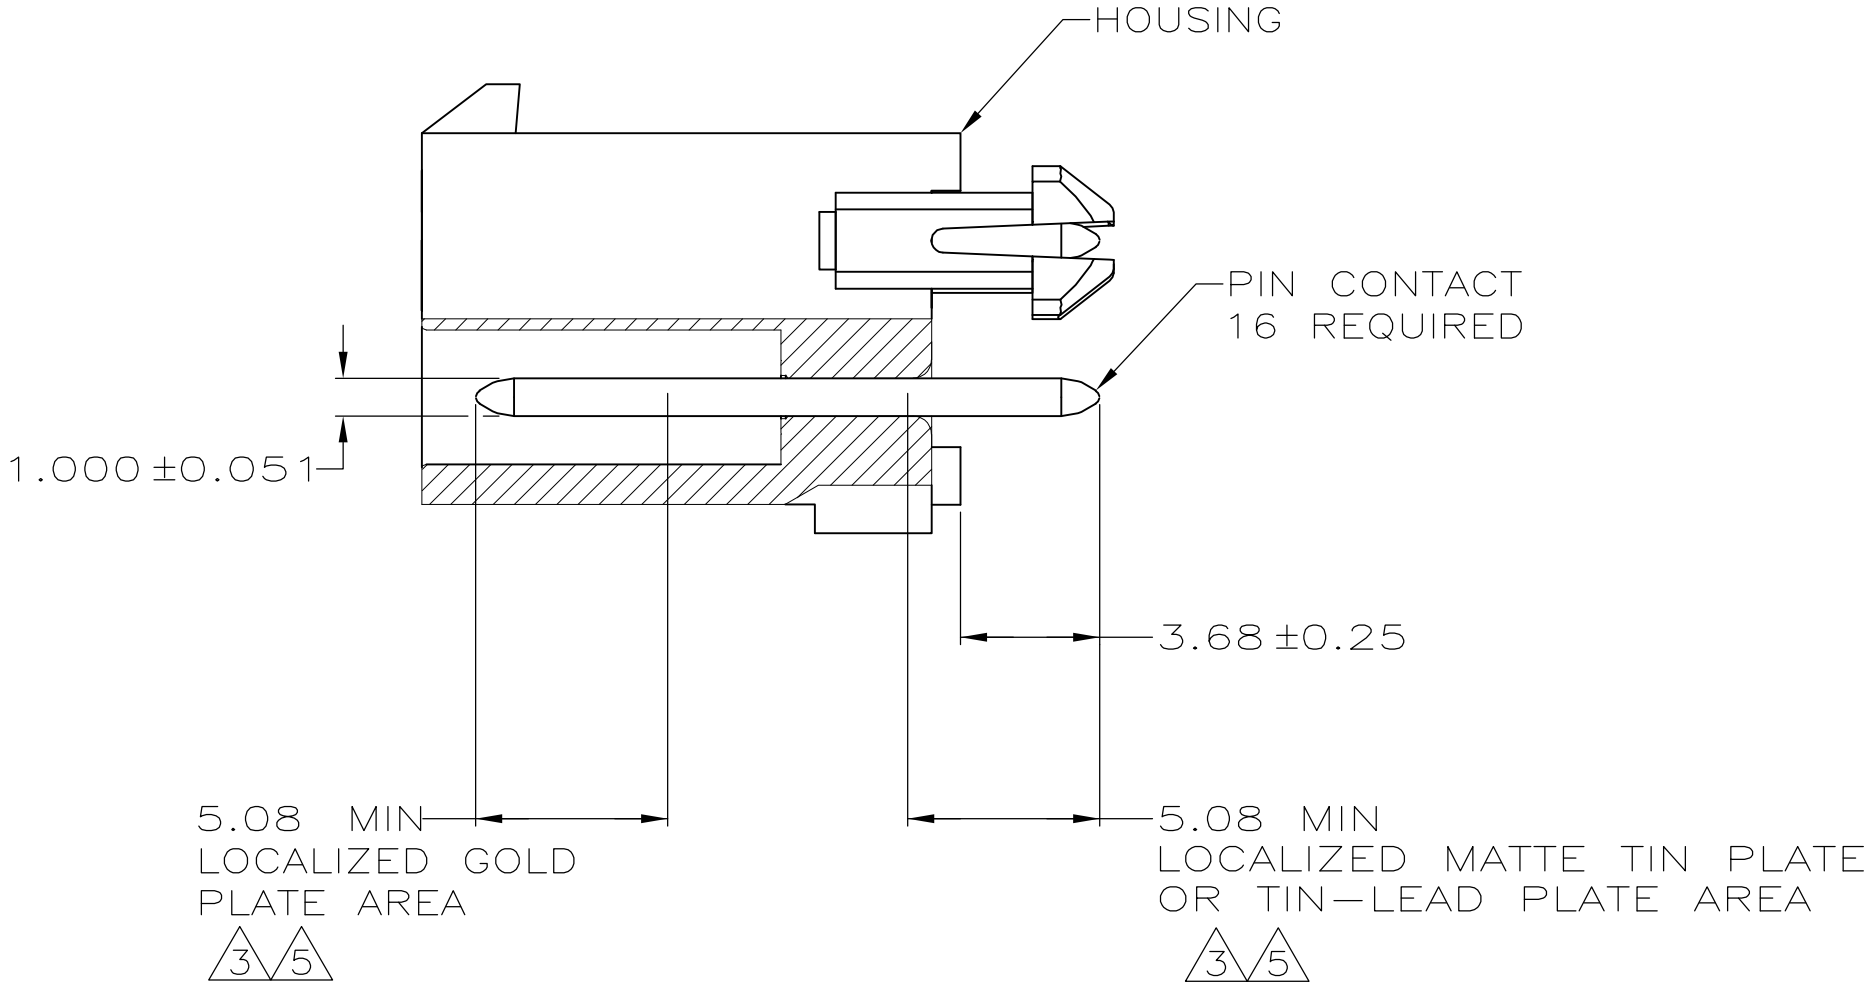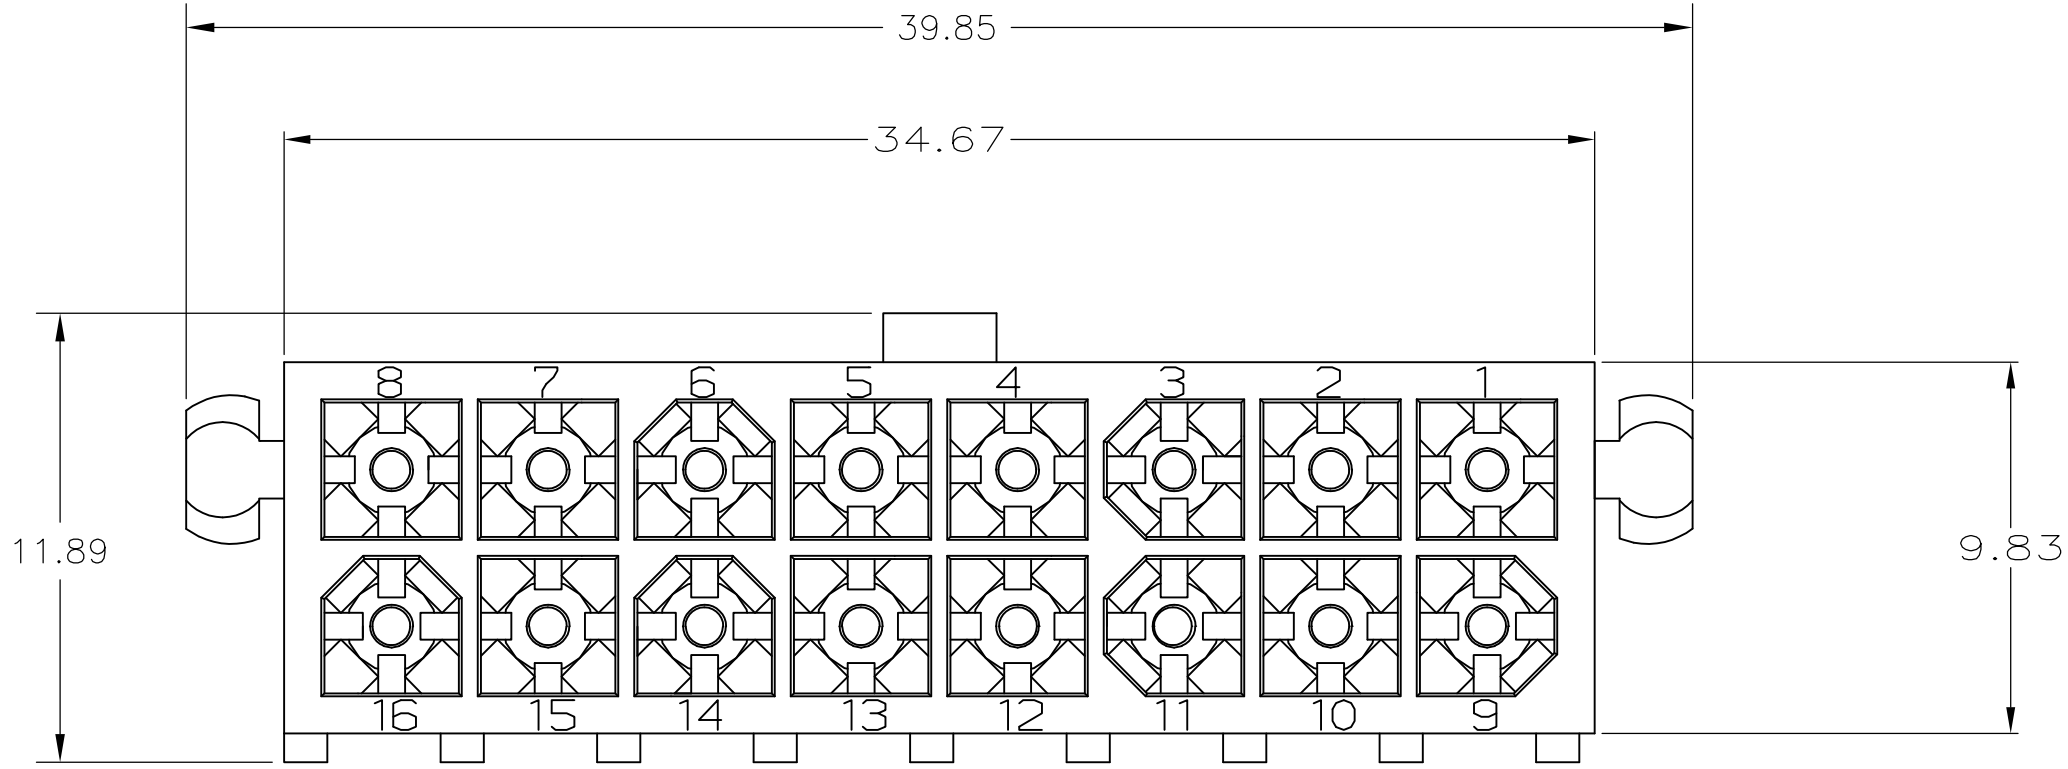

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

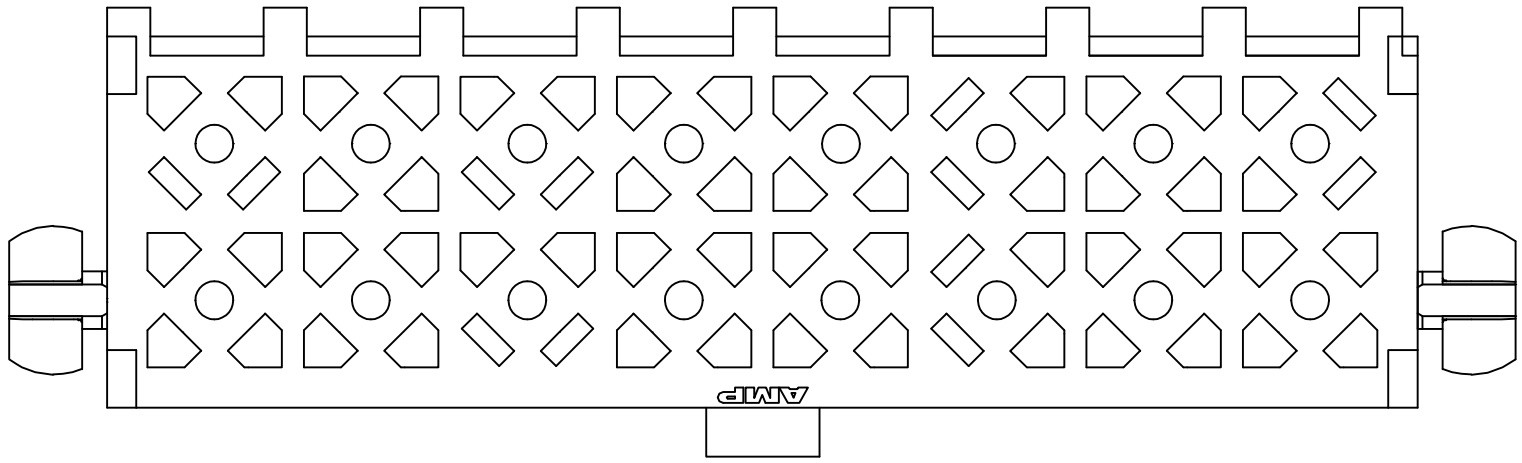

BRASS, GOLD	△ 5	NYLON, UL94V-0	WHITE	1-794068-1
BRASS, TIN	△ 4	NYLON, UL94V-0	WHITE	1-794068-0
BRASS, GOLD	△ 3	NYLON, UL94V-0	WHITE	794068-2
BRASS, TIN-LEAD	△ 2	NYLON, UL94V-0	WHITE	794068-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER	OBJUN05	TE Connectivity	
		CHK R JONES	29JUL2003		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		PRODUCT SPEC	
				APPLICATION SPEC	
MATERIAL		WEIGHT		RESTRICTED TO	
-		-		A1 00779 794068	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1 REV F	