


# Printed-circuit board connector - MCV 1,5/ 6-G-3,5-THT P26 R44WP - 1701286

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 8 A, number of positions: 6, pitch: 3.5 mm, color: black, contact surface: Tin

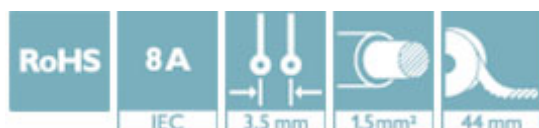

## Key Commercial Data

|                        |                                                                                    |
|------------------------|------------------------------------------------------------------------------------|
| Packing unit           | 140 pc                                                                             |
| Minimum order quantity | 140 pc                                                                             |
| GTIN                   |  |
| GTIN                   | 4046356524537                                                                      |

## Technical data

### Dimensions

|                          |         |
|--------------------------|---------|
| Pitch                    | 3.5 mm  |
| Dimension a              | 17.5 mm |
| Height                   | 10 mm   |
| Length of the solder pin | 2.6 mm  |

### General

|                                  |                   |
|----------------------------------|-------------------|
| Range of articles                | MCV 1,5/...-G-THT |
| Rated voltage (III/3)            | 160 V             |
| Connection in acc. with standard | EN-VDE            |
| Nominal current $I_N$            | 8 A               |
| Color                            | black             |
| Number of positions              | 6                 |

### Standards and Regulations

|                                  |        |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
|                                  | CUL    |

### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Printed-circuit board connector - MCV 1,5/ 6-G-3,5-THT P26 R44WP - 1701286

### Approvals

#### Approvals

Approvals

EAC / cULus Recognized

Ex Approvals

#### Approval details

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-----------------------------------------------------------------------------------|---------|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20110128 |
|                    | D                                                                                   | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 8 A                                                                                 | 8 A                                                                                                                                                   |                 |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>